


TO BE AN EXCELLENT ENTERPRISE
TO MAKE THE BEST PRODUCTS
TO BE A KIND PERSON



Wenzhou Baode Electric Co.,Ltd

Add: No.188 Second Road,Binhai Sector,Wenzhou
Economic Development Zone,ZheJiang China.

Tel: 0086-577-86550866

Fax:0086-577-86531667

Postcode: 325025

Email: bestest@sunnybell.com.cn

www.sunnybell.com.cn

Wenzhou Baode Electric Co.,Ltd



Wenzhou Baode Electric Co.,Ltd is a company encouraging happiness,harmony,innovation and excellence.Since it's established in 1998,BaoDe has been seeking for and adhering to such value as customer-oriented,high quality and uniqueness .We specialized in high precision electromagnetism coil,RF control system and voltage safety device.Such as door chimes,switch buttons,door bell transformers, buzzers,portable RCD,motion sensor,voltage testers etc.

Through our ten-year endeavor,we get a conception to live in this competitive field,which is LEARN TO KNOW,LEARN TO DO AND LEARN TO LIVE TOGETHER.

We have set up R&D Centre,Structure designing dept and Tooling Making Centre in order to keep pace with comtomers' requirements. We will keep improving and satisfying for all our costomers all the time.

SUNNYBELL

HAPPY BAODE WARMLY HOME



CERTIFICATION

TO BE AN EXCELLENT ENTERPRISE

TO MAKE THE BEST PRODUCTS

TO BE A KIND PERSON.

WIRELESS DC DOOR CHIME
01



WIRELESS AC DOOR CHIME
11



WIRED ELECTRONIC DOOR
CHIME
17



WIRED MECHANICAL DOOR
CHIME
21



DOOR BELL TRANSFORMER
35




DOOR BELL PUSHER
37



TRAILING SOCKETS
39



PLUG & ADAPTOR
41



VOLTAGE TESTER
43



RESIDUAL CIRCUIT DEVICE
47





WIRELESS DC DOOR CHIME



Product datasheet

Wireless electronic door chime DC type
• Learning code matching of chime and transmitter to avoid interference
• Wireless working range in 150 meters in open area
• 36 pcs high quality melodies
• Sound volume can be adjusted in 4 level from 0 to 85dB
• Flash light when ringing
• Each chime can match with 16 transmitters .
• Transmitter IP44 proof for outdoor using.
• Frequency in 433MHz
• Power of chime 3pcs AA size battery
• Power of transmitter 1pcs CR2032 battery



ST-1030W



ST-1030B



Product datasheet

Wireless electronic door chime DC type
• Learning code matching of chime and transmitter to avoid interference
• Wireless working range in 150 meters in open area
• 36 pcs high quality melodies
• Sound volume can be adjusted in 4 level from 0 to 85dB
• Flash light when ringing
• Each chime can match with 16 transmitters .
• Transmitter IP44 proof for outdoor using.
• Frequency in 433MHz
• Power of chime 3pcs AA size battery
• Power of transmitter 1pcs CR2032 battery



ST-1031W



ST-1031B



Product datasheet

- Wireless door chime with classic morden design DC type
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range up to 200 meters in open area
 - 16 pcs high quality stereo melodies in chime
 - Select the interesting melodies on chime or transmitter freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - Three working method of chime:
only melody or only lighting or melody+lighting
 - One chime can match with 16 transmitters ,no limitation for one transmitter match with how many chimes.
 - Transmitter with self-name card and IP44 proof for outdoor using.
 - Frequency in 433MHz
 - Power of chime: 3pcs AA size battery
 - Power of transmitter: 1pcs 12V/23A battery



ST-1002S



Product datasheet

- Wireless door chime with classic morden design DC type
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range up to 200 meters in open area
 - 16 pcs high quality stereo melodies in chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - Three working method of chime:
only melody or only lighting or melody+lighting
 - One chime can match with 16 transmitters ,no limitation for one transmitter match with how many chimes.
 - Transmitter with self-name card and IP44 proof for outdoor using.
 - Frequency in 433MHz
 - Power of chime: 3pcs AA size battery
 - Power of transmitter: 1pcs 12V/23A battery



ST-1001S



ST-1002B



ST-1002G



ST-1001B




ST-1001G





ST-1106



Product datasheet

- Wireless electronic door chime with classic morden design DC type**
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 150 meters in open area
 - 8 pcs euphonic melodies in chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - Three working method of chime: only melody or only lighting or melody+lighting
 - One chime can match with 16 transmitters ,no limitation for one transmitter match with how many chimes.
 - Transmitter with self-name card and IP55 proof for outdoor using.
 - Frequency in 433MHz
 - Power of chime 3pcs AA size battery
 - Power of transmitter 1pcs CR2032 battery



ST-69RN




Product datasheet

- Portable wireless DC door chime**
- Wireless working range up to 80 meters in open area
 - 36 melodies to choose on door chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - Working method of chime: melody+lighting
 - Frequency in 433MHz
 - Power of chime: 3pcs AA size battery
 - Power of transmitter: 1pcs 12V/23A battery



ST-1107



Product datasheet

- Classic Wireless DC Door chime**
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 150 meters in open area
 - 38 pcs euphonic melodies in chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - Working method of chime: melody+lighting
 - One chime can match with 16 transmitters ,no limitation for one transmitter match with how many chimes.
 - Transmitter with self-name card and IP55 proof for outdoor using.
 - Frequency in 433MHz
 - Power of chime 3pcs AA size battery
 - Power of transmitter 1pcs CR2032 battery



ST-715



Product datasheet

- Wireless DC door chime**
- Wireless working range up to 80 meters in open area
 - 36 melodies to choose on door chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - Working method of chime: melody+lighting
 - Frequency in 433MHz
 - Power of chime: 3pcs AA size battery
 - Power of transmitter: 1pcs 12V/23A battery



ST-1108




Product datasheet

- Classic Wireless DC Door chime**
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 200 meters in open area
 - 50 pcs euphonic melodies in chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - One chime can match with 16 transmitters ,no limitation for one transmitter match with how many chimes.
 - Transmitter with self-name card and IP55 proof for outdoor using.
 - Frequency in 433MHz
 - Power of chime 3pcs AA size battery
 - Power of transmitter 1pcs CR2032 battery



ST-716




Product datasheet

- Wireless DC door chime**
- Wireless working range up to 80 meters in open area
 - 36 melodies to choose on door chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - Frequency in 433MHz
 - Power of chime: 3pcs AA size battery
 - Power of transmitter: 1pcs 12V/23A battery



ST-887S




Product datasheet

- Classic wireless DC door chime
- Wireless working range up to 100 meters in open area
 - 2 melodies (Dingdong & Westminster) to choose on transmitter
 - Loudness level 80dB
 - Frequency in 433MHz
 - Power of chime: 3pcs C size battery
 - Power of transmitter: 1pcs 12V/23A battery



ST-66S




Product datasheet

- Classic wireless DC door chime
- Wireless working range up to 80 meters in open area
 - 2 melodies (Dingdong & Westminster) to choose on transmitter
 - Loudness level 80dB
 - Frequency in 433MHz
 - Power of chime: 3pcs C size battery
 - Power of transmitter: 1pcs 12V/23A battery



ST-1005




Product datasheet

- Classic Wireless DC Door chime
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 100 meters in open area
 - 38 pcs euphonic melodies in chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - Working method of chime: melody+lighting
 - One chime can match with 16 transmitters ,no limitation for one transmitter match with how many chimes.
 - Transmitter with self-name card and IP44 proof for outdoor using.
 - Frequency in 433MHz
 - Power of chime 3pcs AA size battery
 - Power of transmitter 1pcs CR2032 battery



ST-69/1S




Product datasheet

- Classic wireless DC door chime
- Wireless working range up to 80 meters in open area
 - 2 melodies (Dingdong & Westminster) to choose on transmitter
 - Loudness level 80dB
 - Frequency in 433MHz
 - Power of chime: 3pcs C size battery
 - Power of transmitter: 1pcs 12V/23A battery



ST-1010




Product datasheet

- Classic Wireless DC Door chime
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 200 meters in open area
 - 36 pcs euphonic melodies in chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from quiet to 85dB
 - Working method of chime: melody+lighting
 - One chime can match with 16 transmitters ,no limitation for one transmitter match with how many chimes.
 - Transmitter with self-name card and IP44 proof for outdoor using.
 - Frequency in 433MHz
 - Power of chime 3pcs AA size battery
 - Power of transmitter: 1pcs 12V/23A battery



ST-60S




Product datasheet

- Classic wireless DC door chime
- Wireless working range up to 200 meters in open area
 - 3 melodies to choose on transmitter
 - Three working method of chime: only melody or only lighting or melody+lighting
 - Loudness level 85dB
 - Frequency in 433MHz
 - Power of chime: 3pcs C size battery or 6V adaptor
 - Power of transmitter: 1pcs 12V/23A battery



ST-801



Product datasheet

Classic wireless DC door chime

- Wireless working range up to 100 meters in open area
- 16 melodies to choose on transmitter
- Loudness level 80dB
- Frequency in 433MHz
- Power of chime: 3pcs C size battery
- Power of transmitter: 1pcs 12V/23A battery



ST-802



ST-803



ST-804



ST-805



ST-806



ST-807



ST-808



SD-004

PIR sensor with door chime



SD-001

Magnetic sensor



8 melodies



D C



Easy Installation



R F



Portability



12 months warrant

Product datasheet


- Learning code matching of chime and transmitter to avoid interference
- 8pcs selectable melodies for chime


- A PIR sensor which active door chime ,for indoor use only
- PIR detecting range max.4 meter
- PIR to door chime in range max.100 meter

- A magnetic sensor is normally mounted on doors or windows
- Magnetic sensor to door chime in range max.100 meter

- These sensors can be fitted to cat flaps,garage doors and even cupboards,
- Each sensor can trigger the door chimes to play alarm sound.
- Easy installation no wiring required


- Power supply
- Chime by 3pcs C size battery
- PIR sensor by 1pcs 9V/6LR61 battery
- Magnetic sensor by 1pcs CR2032 battery

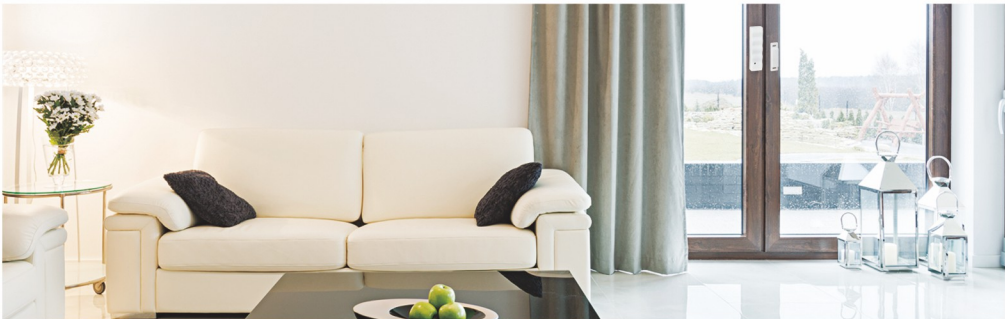




ST-1105 Product datasheet

- Kinetic Wireless Plug-in Door chime**
- Available plug: UK, Americal, Germany
 - Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 100 meters in open area
 - 36 melodies to choose by door chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from 0 to 80dB
 - Working method of chime: melody+lighting
 - Frequency in 433MHz
 - Power of chime by 220-240V
 - Kinetic transmitter no extra power requested




Product datasheet

- Wireless Kinetic door chime• Available plug: UK, Americal, Germany**
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 100 meters in open area
 - 36 melodies to choose by door chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 3 level from 30dB to 80dB
 - Working method of chime: melody+lighting
 - Frequency in 433MHz
 - Power of chime by 220-240V
 - Kinetic transmitter power by itself



Product datasheet

- Wireless electronic door chime AC type**
- Available plug type: UK, Americal, Germany
 - Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 150 meters in open area
 - 36 pcs high quality melodies
 - Sound volume can be adjusted in 4 level from 0 to 85dB
 - Working method of chime: melody+lighting
 - Each chime can match with 16 transmitters
 - Transmitter IP44 proof for outdoor using
 - Frequency in 433MHz
 - Power of chime by AC 90-250V
 - Kinetic transmitter power by itself



Product datasheet


- Wireless electronic door chime AC type**
- Available plug type: UK, Americal, Germany
 - Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 150 meters in open area
 - 36 pcs high quality melodies
 - Sound volume can be adjusted in 4 level from 0 to 85dB
 - Working method of chime: melody+lighting
 - Each chime can match with 16 transmitters
 - Transmitter IP44 proof for outdoor using
 - Frequency in 433MHz
 - Power of chime by AC 90-250V
 - Kinetic transmitter power by itself



ST-1030W-Y
ST-1030W-M
ST-1030W-O



ST-1030B-Y
ST-1030B-M
ST-1030B-O



Product datasheet


- Wireless electronic door chime AC type**
- Available plug type: UK, Americal, Germany
 - Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 150 meters in open area
 - 36 pcs high quality melodies
 - Sound volume can be adjusted in 4 level from 0 to 85dB
 - Working method of chime: melody+lighting
 - Each chime can match with 16 transmitters
 - Transmitter IP44 proof for outdoor using
 - Frequency in 433MHz
 - Power of chime by AC 90-250V
 - Power of transmitter 1pcs CR2032 battery



ST-1031W-Y
ST-1031W-M
ST-1031W-O



ST-1031B-Y
ST-1031B-M
ST-1031B-O



Product datasheet

- Wireless electronic door chime AC type**
- Available plug type: UK, Americal, Germany
 - Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 150 meters in open area
 - 36 pcs high quality melodies
 - Sound volume can be adjusted in 4 level from 0 to 85dB
 - Working method of chime: melody+lighting
 - Each chime can match with 16 transmitters
 - Transmitter IP44 proof for outdoor using
 - Frequency in 433MHz
 - Power of chime by AC 90-250V
 - Power of transmitter 1pcs CR2032 battery



ST-1109



Product datasheet

- Classic Wireless AC Plug-in Door chime**
- Available plug: UK, Americal, Germany
 - Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 200 meters in open area
 - 50 melodies to choose by door chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 4 level from 0dB to 80dB
 - Frequency in 433MHz
 - Power of chime by AC 90-240V
 - Power of Transmitter by 1xCR2032 battery



ST-1020



Product datasheet

- Classic Wireless USB-AC Door chimev**
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 100 meters in open area
 - 36 melodies to choose by door chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 3 level from 30dB to 80dB
 - Working method of chime: melody+lighting
 - Frequency in 433MHz
 - Power of chime by 110-240V via USB adaptor
 - Power of transmitter 1pcs CR2032 battery



ST-1021



ST-1024



Product datasheet

- Classic Wireless AC Door chime**
- Available plug: UK, Americal, Germany
 - Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 100 meters in open area
 - 36 melodies to choose by door chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 3 level from 30dB to 80dB
 - Working method of chime: melody+lighting
 - Frequency in 433MHz
 - Power of chime by 220-240V
 - Power of transmitter 1pcs CR2032 battery



Product datasheet

- Classic Wireless AC Door chime**
- Available plug: UK, Americal, Germany
 - Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 100 meters in open area
 - 36 melodies to choose by door chime
 - Select the interesting melodies on chime freely
 - Sound volume can be adjusted in 3 level from 30dB to 80dB
 - Working method of chime: melody+lighting
 - Frequency in 433MHz
 - Power of chime by 220-240V
 - Power of transmitter 1pcs CR2032 battery



ST-714



Product datasheet

- Wireless AC door chime with Europlug**
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 100 meters in open area
 - 50 pcs high quality melodies
 - Working method of chime: melody+lighting
 - Each chime can match with 16 transmitters
 - Frequency in 433MHz
 - Transmitter IP44 proof for outdoor using
 - Power of chime by AC 90-250V
 - Power of transmitter by 1pcs 12V/23A battery



ST-18M



Product datasheet

- Wireless AC door chime with Europlug**
- Wireless working range up to 100 meters in open area
 - 12 melodies to choose on transmitter
 - Select the interesting melodies on transmitter freely
 - Three working method of chime: only melody or only lighting or melody+lighting
 - Loudness level 80dB
 - Frequency in 433MHz
 - Power of chime: by 220V main power
 - Power of transmitter: 1pcs 12V/23A battery



ST-885



Product datasheet

- Wireless AC door chime with Europlug**
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 100 meters in open area
 - 50 pcs high quality melodies
 - Working method of chime: melody+lighting
 - Each chime can match with 16 transmitters
 - Frequency in 433MHz
 - Transmitter IP44 proof for outdoor using
 - Power of chime by AC 90-250V
 - Power of transmitter by 1pcs 12V/23A battery




ST-78S



Product datasheet

- Wireless AC door chime with Europlug**
- Learning code matching of chime and transmitter to avoid interference
 - Wireless working range in 100 meters in open area
 - 50 pcs high quality melodies
 - Sound volume can be adjusted from 0 to 85dB
 - Each chime can match with 16 transmitters
 - Frequency in 433MHz
 - Transmitter IP44 proof for outdoor using
 - Power of chime by AC 90-250V
 - Power of transmitter by 1pcs 12V/23A battery



ST-98B Product datasheet

- Wired Electronic DC door chime
- 8 pcs high quality melodies with LED lighting
 - 4 level sound volume control from quiet to 90dB
 - Power by 3pcs AA/LR6 battery

ST-98D Product datasheet

- Wired Electronic AC door chime
- 8 pcs high quality melodies with LED lighting
 - 4 level sound volume control from quiet to 90dB
 - Power by 220V-240V AC

ST-98T Product datasheet

- Wired Electronic AC door chime with build-in transformer
- 8 pcs high quality melodies with LED lighting
 - 4 level sound volume control from quiet to 90dB
 - Power by 220V-240V AC



B Type Product datasheet

- Wired electronic DC door chime
- 12 melodies choosing by button on right side of chime
 - 70dB or 80dB of volume adjust by button on right side of chime
 - Work frequency 50-60MHz
 - Operating power requestion: 4pcs 'AA' alkaline batteries for chime

D Type Product datasheet

- Wired electronic AC door chime
- 12 melodies choosing by button on right side of chime
 - 70dB or 80dB of volume adjust by button on right side of chime
 - Work frequency 50-60MHz
 - Operating power requestion: Direct to main power 220-240V for chime



ST-89B ST-89D



B Type Product datasheet


- Wired electronic DC door chime
- 12 melodies choosing by button on right side of chime
 - 70dB or 80dB of volume adjust by button on right side of chime
 - Work frequency 50-60MHz
 - Operating power requestion: 4pcs 'AA' alkaline batteries for chime

D Type Product datasheet

- Wired electronic AC door chime
- 12 melodies choosing by button on right side of chime
 - 70dB or 80dB of volume adjust by button on right side of chime
 - Work frequency 50-60MHz
 - Operating power requestion: Direct to main power 220-240V for chime



ST-90B ST-90D



B Type Product datasheet


- Wired electronic DC door chime
- 12 melodies recycle or only ding-dong sound
 - Operating power requestion: 2pcs 'AA' alkaline batteries for chime

D Type Product datasheet

- Wired electronic AC door chime
- 12 melodies recycle or only ding-dong sound
 - Operating power requestion: Directly to 220V-240V main power

T Type Product datasheet


- Electronic AC door chime with build-in transformer
- 8 melodies choosing by button inside of chime
 - Operating power requestion: Directly to 220V-240V main power

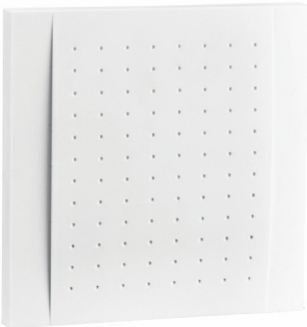

ST-99B ST-99D ST-99T



TD-01MW




Product datasheet

- Wired Electronic Ceiling Door Bell
- 2 melodies
 - 2 sound level 80dB/70dB
 - Working method of chime: melody+lighting
 - Ceiling hole Φ90mm
 - Power by 230V AC 50/60Hz
 - Operate circuit < 30mA



ST-102




Product datasheet

- Wired Electronic Door Bell
- Suitable for all 86x86 switch box.
 - Ding-Dong melody
 - Working method of chime: melody+lighting
 - Sound volume 80dB
 - Power by 230V AC 50Hz
 - Operate circuit < 50mA



ST-3230BM

ST-3230TM



B Type Product datasheet

- Wired Electronic AC Door Bell
- 8 melodies choosing by button
 - Sound level 85dB
 - Power by 1pcs 9V/6LR61 battery or AC 8-12V transformer

T Type Product datasheet

- Wired Electronic AC Door Bell
- 8 melodies choosing by button
 - Sound level 85dB
 - Power by 230VAC 50/60Hz
 - With Build-in transformer 8V/1A



ST-1030M-W



ST-1030M-B



ST-1031M-W



ST-1031M-B



DT-01M



DT-02M



DT-03M





DT-04M

Product datasheet



- Wired Electronic Door Bell
- 36 melodies choosing by button
 - 4 sound level from 0dB to 80dB
 - Power and wiring solution in different ways according to the requestion from different market, more details as below drawing

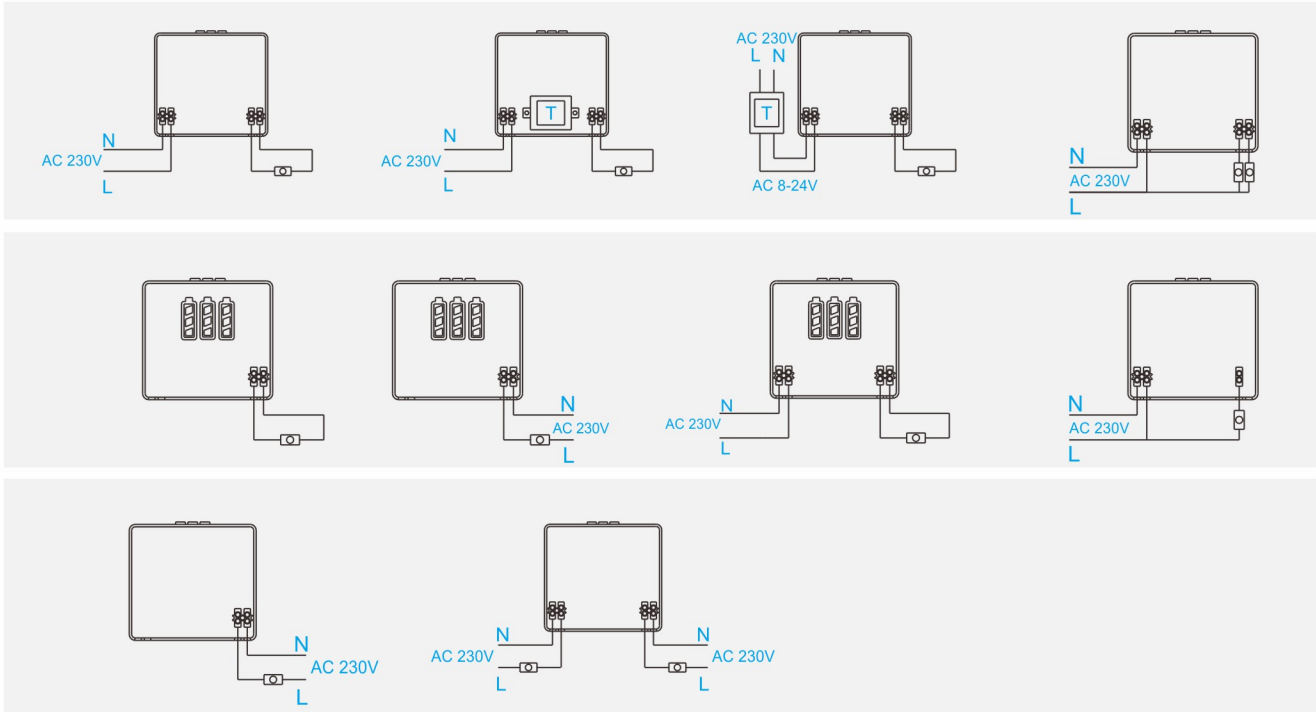



SW-3151T

- Wired Mechanical AC door chime with built-in transformer 8V/1A
- Ding Dong sound 80dB with LED lighting
- Power by 220V-240V AC 50/60Hz

SW-3151D

- Wired mechanical AC door chime
- Ding Dong sound 80dB with LED lighting
- Power by 220V-240V AC 50Hz
- With short-circuit protection

SW-3151B

- Wired mechanical DC door chime
- Ding Dong sound 80dB with LED lighting
- Power by 4pcs 'C' alkaline batteries or 8-12V transformer



B Type Product datasheet

- Mechanical DC ding-dong door chime**
- White cover / white or black base
 - Ding-Dong sound 80dB
 - Product dimension: 17x10.5x4.9cm
 - Carton: 61x32.5x28cm/24pcs
 - Operating power requestion: 4pcs 'C' alkaline batteries for chime or external transformer 8V/1A

D Type Product datasheet

- Mechanical AC ding-dong door chime**
- White cover / white or black base
 - Ding-Dong sound 80dB 50/60Hz
 - Product dimension: 17x10.5x4.9cm
 - Carton: 61x32.5x28cm/24pcs
 - Operating power requestion: Direct to main power 220-240V for chime
 - With short-circuit self protection by PTC

T Type Product datasheet

- Mechanical AC ding-dong door chime**
- White cover / white or black base
 - Ding-Dong sound 80dB 50/60Hz
 - Product dimension: 17x10.5x4.9cm
 - Carton: 61x32.5x28cm/24pcs
 - With built-in transformer 8V/1A
 - Operating power requestion: Direct to main power 220-240V for chime



SW-3138B SW-3138D SW-3138T



SW-3141B SW-3141D SW-3141T



SW-3142B SW-3142D SW-3142T



SW-3150B SW-3150D SW-3150T



ST-3230B ST-3230D ST-3230T



🔹 B Type Product datasheet

Mechanical DC ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• Operating power requestion: 4pcs 'C' alkaline batteries for chime or external transformer 8V/1A



ST-3231B ST-3231D ST-3231T

🔹 D Type Product datasheet

Mechanical AC ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB 50/60Hz
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• Operating power requestion: Direct to main power 220-240V for chime
• With short-circuit self protection by PTC

🔹 T Type Product datasheet

Mechanical AC ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB 50/60Hz
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• With built-in transformer 8V/1A
• Operating power requestion: Direct to main power 220-240V for chime



ST-3232B ST-3232D



ST-3233B ST-3233D ST-3233T



ST-3234B ST-3234D ST-3234T



🔹 B Type Product datasheet

Mechanical DC ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• Operating power requestion: 4pcs 'C' alkaline batteries for chime or external transformer 8V/1A

🔹 D Type Product datasheet

Mechanical AC ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB 50/60Hz
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• Operating power requestion: Direct to main power 220-240V for chime
• With short-circuit self protection by PTC

🔹 T Type Product datasheet

Mechanical AC ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB 50/60Hz
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• With built-in transformer 8V/1A
• Operating power requestion: Direct to main power 220-240V for chime



ST-3236B ST-3236D ST-3236T



ST-3237B ST-3237D ST-3237T



ST-3239B ST-3239D ST-3239T



ST-3241B ST-3241D ST-3241T



🔹 B Type Product datasheet

Mechanical DC ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• Operating power requestion: 4pcs 'C' alkaline batteries for chime or
• external transformer 8V/1A

🔹 D Type Product datasheet

Mechanical AC ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB 50/60Hz
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• Operating power requestion: Direct to main power 220-240V for chime
• With short-circuit self protection by PTC

🔹 T Type Product datasheet

Mechanical AC ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB 50/60Hz
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• With built-in transformer 8V/1A
• Operating power requestion: Direct to main power 220-240V for chime



ST-3242B ST-3242D ST-3242T



ST-3246B ST-3246D ST-3246T



ST-3248B ST-3248D ST-3248T



ST-350TB ST-350T



🔹 TB Type Product datasheet

Mechanical ding-dong door chime with buzzer function
• White cover / white or black base
• Ding-Dong sound 80dB 50/60Hz
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• With built-in transformer 8V/1A
• Operating power requestion: Direct to main power 220-240V for chime

🔹 T Type Product datasheet

Mechanical ding-dong door chime
• White cover / white or black base
• Ding-Dong sound 80dB 50/60Hz
• Product dimension: 17x10.5x4.9cm
• Carton: 61x32.5x28cm/24pcs
• With built-in transformer 8V/1A
• Operating power requestion: Direct to main power 220-240V for chime



🔹 TB Type Product datasheet

Wired Front & Back Ding-Dong Door Bell
• Ding-Dong sound or Triple Ding-Dong sound
• 80dB sound volume
• Power by 8-12V AC

🔹 T Type Product datasheet

Wired Front & Back Ding-Dong Door Bell
• Ding-Dong sound or Triple Ding-Dong sound
• 80dB sound volume
• Power by 230V AC with build-in transformer



ST-3230TB-QH ST-3230T-QH



▶ B Type Product datasheet

- Mechanical DC ding-dong door chime**
- White cover / white or black base
 - Ding-Dong sound 80dB
 - Product dimension: 11.6x11.6x4.8cm
 - Carton: 89.5x29.5x30cm/50pcs
 - Operating power request: 1pcs 9V.6LR61 size batteries for chime or external transformer 8V-12V

▶ D Type Product datasheet

- Mechanical AC ding-dong door chime**
- White cover / white or black base
 - Ding-Dong sound 80dB 50/60Hz
 - Product dimension: 11.6x11.6x4.8cm
 - Carton: 89.5x29.5x30cm/50pcs
 - Operating power request: Direct to main power 220-240V for chime
 - With short-circuit self protection by PTC



SW-3139B SW-3139D



SW-3140B SW-3140D



SW-3158B SW-3158D





ST-3235B ST-3235D



▶ B Type Product datasheet

- Mechanical DC ding-dong door chime**
- White cover / white or black base
 - Ding-Dong sound 80dB
 - Product dimension: 11.6x11.6x4.8cm
 - Carton: 89.5x29.5x30cm/50pcs
 - Operating power requestion: 1pcs 9V.6LR61 size batteries for chime or external transformer 8V-12V

▶ D Type Product datasheet

- Mechanical AC ding-dong door chime**
- White cover / white or black base
 - Ding-Dong sound 80dB 50/60Hz
 - Product dimension: 11.6x11.6x4.8cm
 - Carton: 89.5x29.5x30cm/50pcs
 - Operating power requestion: Direct to main power 220-240V for chime
 - With short-circuit self protection by PTC



ST-3238B ST-3238D




ST-3240B ST-3240D



ST-3208B ST-3208D



ST-3200D




▶ Product datasheet

- Economic Machenical Ding-Dong Door Chime**
- White clour , Laser printing available according to requestion.
 - 80dB sound volume
 - I/P: 220-240V / 50/60Hz /130mA
 - With short-circuit self protection by PTC
 - Product dimension : 120*82*38mm




ST-3243D



▶ Product datasheet


- Mechanical ding-dong door chime**
- White cover / white or black base
 - 80dB of sound volume
 - Product dimension: 13.5x7.9x5.0cm
 - Carton: 54.5x33.5x45cm/60pcs
 - Operating power requestion: Direct to main power 220-240V 50/60Hz





Product datasheet

Economic Ding-Dong door chime	
• Different cover designs	
• 80dB~85dB sound volume	
• I/P 220~240V/60Hz or 110~127V/50Hz	
• With short-circuit self protection by PTC	
• Dimension 12x7x4cm	
• Unit package by giftbox	
• Carton box: 43.5x26.5x17cm/40pcs/9kgs	

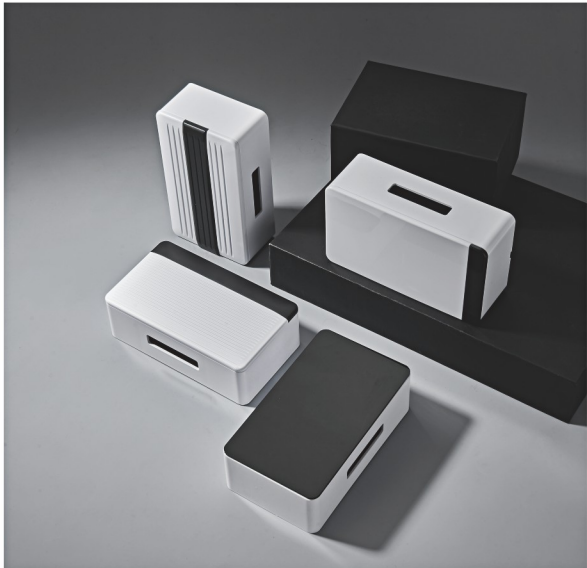

DT-01

DT-02

DT-03


DT-04

DT-05 Series in colourful acrylic design





BELL-001B



Product datasheet

Electric Bell	Electric Bell
• Voltage :8V-12V	• Voltage :230V
• Power :2W	• Power :3.5W
• Sound volume: 90dB	• Sound volume: 90dB
• Frequency :50/60Hz	• Frequency :50/60Hz
• Diameter : 76mm	• Diameter : 76mm
• Black electroplating	• Brass electroplating



BELL-001S




Product datasheet

Electric Bell	Electric Bell
• Voltage :8V-12V	• Voltage :230V
• Power :2W	• Power :3.5W
• Sound volume: 90dB	• Sound volume: 90dB
• Frequency :50/60Hz	• Frequency :50/60Hz
• Diameter : 76mm	• Diameter : 76mm
• Chrome electroplating	• Brass electroplating




BELL-001G




Product datasheet

Electric Bell	Electric Bell
• Voltage :8V-12V	• Voltage :230V
• Power :2W	• Power :3.5W
• Sound volume: 90dB	• Sound volume: 90dB
• Frequency :50/60Hz	• Frequency :50/60Hz
• Diameter : 76mm	• Diameter : 76mm
• Brass electroplating	• Brass electroplating



BELL-003




Product datasheet

Electric Bell
• Voltage :220V-240V
• Power :5W
• Sound volume: 80dB
• Frequency :50/60Hz



BELL-002




Product datasheet

Alarm Bell
• Dimension: Φ100mm/150mm
• Power: 12V/24V/230V AC 50/60Hz
• Sound volume: 80-95dB



BELL-004




Product datasheet

Alarm Bell
• Dimension: Φ150mm/6"
• Power: 6V/12V/24V/120V/230V AC 50/60Hz
• Sound volume: >95dB
• Aluminium or Plastic Base



BELL-005




Product datasheet

Alarm Bell
• Dimension: Φ250mm/10"
• Power: 6V/12V/24V/120V/230V AC 50/60Hz
• Sound volume: >100dB
• Aluminium or Plastic Base



ST-8188



Product datasheet

Wired buzzer door chime
• Voltage: 8V/110V/220V
• Sound volume: 80dB
• Frequency: 50/60Hz
• Product dimension: 5.7x4.0x2.9cm
• Carton dimension: 48.5x18.5x47.5cm/100pcs

T-100A
T-100B



Product datasheet

- Door bell transformer with fuse or re-workable fuse
- Surface or DIN rail mounting
 - 91x53x38mm
 - 220V-240V Input
 - 8V,1A Output
 - Frequency: 50/60Hz
 - ENEC approval

T-87



Product datasheet

- Door bell transformer
- Surface or DIN rail mounting
 - 91x53x38mm
 - 220V-240V Input
 - 8V,1A Output /12V,1A Output
 - Frequency: 50/60Hz


T-88



Product datasheet

- Door bell transformer
- Surface mounting
 - 91x53x38mm
 - 220V-240V Input
 - 8V,1A Output /12V,1A Output
 - Frequency: 50/60Hz

T-308



Product datasheet

- Door bell transformer
- Surface mounting
 - 93x54.6x38.4mm
 - 220V-240V Input
 - 4V-8V-12V output 12VA
 - Frequency: 50/60Hz

T-108



Product datasheet

- Safety isolating transformer
- 88x36x60mm
 - 220V-240V Input
 - 24-10VA Output
 - Frequency: 50/60Hz
 - This transformer is designed for use in 24 or 12+12 V AC
 - Control system with thermal fuse
 - It can be mounted on the rail in switch box


T-108-1



Product datasheet

- Safety isolating transformer
- 88x36x60mm
 - 220V-240V Input
 - 4-8-12V/1A Output
 - Frequency: 50/60Hz
 - This transformer is designed for use in 4V-8V-12V
 - Control system with thermal fuse
 - It can be mounted on the rail in switch box


T-208



Product datasheet

- Safety isolating transformer
- 88x54x60mm
 - 220V-240V Input
 - 24-24VA Output
 - Frequency: 50/60Hz
 - This transformer is designed for use in 24 or 12+12 V AC
 - Control system with thermal fuse
 - It can be mounted on the rail in switch box

T-208-1



Product datasheet

- Safety isolating transformer
- 88x54x60mm
 - 220V-240V Input
 - 4-8-12V/2A Output
 - Frequency: 50/60Hz
 - This transformer is designed for use in 4V-8V-12V
 - Control system with thermal fuse
 - It can be mounted on the rail in switch box



▶ PB-01
AC/DC 0-30V



▶ PB-02 LIGHTING
AC/DC 8-12V



▶ PB-04
AC/DC 0-24V IP44



▶ PB-09S
AC/DC 0-30V IP44



▶ PB-09B
AC/DC 0-30V IP44



▶ PB-09G
AC/DC 0-30V IP44



▶ PB-03W LIGHTING
AC/DC 8-12V IP44



▶ PB-03-2W LIGHTING
AC/DC 8-12V IP44



▶ PB-06W LIGHTING
AC/DC 8-12V



▶ PB-11B LIGHTING
AC/DC 8-12V



▶ PB-72B
AC/DC 0-30V IP44



▶ PB-72G
AC/DC 0-30V IP44



▶ PB-07W LIGHTING
AC/DC 8-12V



▶ PB-08
AC/DC 0-240V IP55



▶ PB-27 LIGHTING
AC/DC 8-12V IP55



▶ PB-75S
AC/DC 0-30V IP44



▶ PB-73B
AC/DC 0-30V IP44



▶ PB-73G
AC/DC 0-30V IP44

Switched Trailing Sockets

Without lead and plug
Individually switched socket
Rewireable
Socket Safety Shutters
Power indicator
Plug 2/3/4/6 items safely into one socket
Wall-fixing capability
Max.load:13A/3250W/250V
Material:PC+Copper
Approval:CB



BS-TSA02



BS-TSA03



BS-TSA04



BS-TSA06



BS-P01
13A 3 Pin Plug With Light 250V
Carton:28x27.5x28.5cm/200pcs/9kgs



BS-P02
13A 3 Pin Plug With Light 250V
Carton:32x22x34.5cm/240pcs/9kgs



BS-P03
13A 3 Pin Plug With Light 250V
Carton:31.5x29x32cm/240pcs/15.5kgs



BS-PS01
13A 3 Pin Plug With Indicator 250V
13A Multi Function Socket
Carton:42x40x22cm/240pcs/15.5kgs



BS-PS02
13A 3 Pin Plug With Indicator 250V
13A Multi Function Socket
Carton:42x40x22cm/240pcs/15.5kgs



BS-PS03
13A 3 Pin Plug With Indicator 250V
13A Multi Function Socket with 1xUSB
Carton:42x40x22cm/240pcs/15.5kgs



BS-P04
13A 3 Pin Plug 250V
Carton:31.5x29x32cm/240pcs/15.5kgs



BS-P05
13A 3 Pin Plug 250V
Carton:32x22x34.5cm/240pcs/9kgs



BS-P06
15A 3 Pin Plug 250V
Carton:34.5x28x32.5cm/200pcs/17kgs



BS-PS04
13A 3 Pin Plug With Indicator 250V
13A Multi Function Socket
Carton:53x28.5x20.5cm/120pcs/14.5kgs



BS-PS05
15A 3 Pin Plug With Indicator 250V
15A Multi Function Socket
Carton:53x28.5x20.5cm/120pcs/14.5kgs



BS-PS06
13A 3 Pin Plug With Indicator 250V
13A Multi Function Socket with 2xUSB
Carton:53x28.5x20.5cm/120pcs/14.5kgs



BS-P07
13A 3 Pin Plug With Light 250V
Carton:31.5x29x32cm/240pcs/15.5kgs



BS-P08
13A 3 Pin Plug With Light 250V
Carton:49x46x30cm/100pcs/15kgs



BS-P09
13A 3 Pin Plug 250V
Carton:31.5x29x32cm/240pcs/15.5kgs



BS-PS07
13A 3 Pin Plug with Light 250V
13A Multi Function Socket
Carton:35.5x30.5x34cm/240pcs/14kgs



BS-PS08
13A 3 Pin Plug with Light 250V
15A Multi Function Socket
Carton:53x26x22.5cm/120pcs/17kgs



BS-PS09
15A 3 Pin Plug with Light 250V
15A Multi Function Socket
Carton:53x26x22.5cm/120pcs/17kgs



▲ BESTEST8 Product datasheet

- Voltage tester-two pins type
- Display of AC and DC via LED
 - Continuity and semiconductor test via LED(symbol"R")
 - Phase indication via LED(symbol"Ph")
 - Polarity display via LED
 - test Earth leakage circuit breaker Via"FI"(push button)
 - Shock and impact proof
 - Voltage indication: +/-12V,50V,120V,230V,400V,690V
 - Continuity and semiconductor test: 0-1M Battery powered
 - Current consumption:52Ma



BESTEST1



▲ Product datasheet

Voltage tester-two pins type	
• Test Range:	
• 110V-230V-400V AC	
• 150V-300V-500V DC	



BESTEST2



▲ Product datasheet

Voltage tester-two pins type	
• Test Range:	
• 110V-400V AC	
• 110V-400V DC	
Voltage indication:	
• 150V/300V/500V	



BESTEST4




▲ Product datasheet

Voltage tester-two pins type	
• Test Range:	
• 6V-400V AC	6V-500V DC
Voltage indication:	
• 6V/12V/24V/50V/110V/230V/400V AC	
• 6V/12V/24V/50V/110V/300V/500V AC	
• Auto voltage range detected and indicated	
• Determines polarity on DC circuit	



BESTEST10



Product datasheet

- Non-touching voltage tester
- Display: LED
 - Testing range: 180V~600V AC
 - Frequency range:50-500Hz
 - Pollution Degree: 2
 - Overvoltage category: CAT III/600V
 - Power supply: 2 x1.5 AAA Size
 - IP65



BESTEST12




Product datasheet

- Non-touching voltage tester
- Display : LED,Vibration
 - Testing range:90V~1000V AC
 - Frequency range:50-500Hz
 - Pollution Degree:2
 - Overvoltage category: CAT III/1000V
 - Power supply:2 x1.5 AAA Size
 - IP65



BESTEST13



Product datasheet

- Non-touching voltage tester
- Display : LED,Sound
 - Testing range:90V~1000V AC
 - Frequency range:50-500Hz
 - Pollution Degree:2
 - Overvoltage category: CAT III/1000V
 - White light on: Status of operating
 - Yellow light on: Low voltage and red light flashes slowly with alarm sounds slowly too
 - Red light on: High voltage and red light flashes fast with alarm sounds fast too
 - Power supply:2 x1.5 AAA Size
 - IP44



BESTEST7



Product datasheet

- Voltage tester-screwdriver type
- Testing AC voltage from 100V up to maximum of 500V against earth.
 - The metal part on top of the indicator must be touched to operate it and the earthing position of the user largely determines whether it lights up or not Failure to light up therefore does not indicate with certainly that no voltage presents



BESTEST7-1



Product datasheet

- Voltage tester-screwdriver type
- Testing AC voltage from 100V up to maximum of 500V against earth.
 - The metal part on top of the indicator must be touched to operate it and the earthing position of the user largely determines whether it lights up or not Failure to light up therefore does not indicate with certainly that no voltage presents



BESTEST9



Product datasheet

- Voltage tester-screwdriver type
- Testing AC voltage from 100V up to maximum of 500V against earth.
 - The metal part above the indicator must be touched to operate it and the earthing position of the user largely determines whether it lights up or not Failure to light up therefore does not indicate with certainly that no voltage presents



MS18



Product datasheet

- Voltage tester-screwdriver type
- Water resistant and shock proof
 - Built-in self-test circuit
 - Continuity test:0-50M
 - Polarity check: 1.2-36v DC
 - AC voltage test:100~500V AC by direct contact method
 - 70~10000V AC by non-contact method
 - Microwave oven leakage detect


Wired


AC


Easy Installation


Portability


12 months warrant


RoHS

Product datasheet

- Personal safety socket with RCD
- Input voltage : 220-240V/AC , 50/60Hz
- Max.load : 3600W
- Rated current : 16A
- Rated residual current : 30mA
- Response time : <30 ms
- Cable cross-section : 1.5mm² or 2.5mm²
- Certification : CE,ROHS
- IP rating : IP44
- Dimension : 86x86x67mm



RCD09

RESIDUAL CIRCUIT DEVICE


Wired


AC


Easy Installation


Portability


12 months warrant


RoHS

Product datasheet

- Rated Voltage: 110-130V/220-240V
- Rated Current: 16A
- Response time: <30ms
- Rated residual current: 10-30mA
- Certification: GS CE&ROHS
- Protection grade for housing: IP66



RCD05


AC


Easy Installation


12 months warrant


RoHS

Product datasheet

- Rated Voltage: 230V/50Hz
- Rated Current: 16A
- Response time: <30ms
- Rated residual current: 30mA
- Frame type: Germany
- Maximum connected load: 3600W
- Certification: GS CE&ROHS
- Protection grade for housing: IP54



RCD01 G


AC


Easy Installation


12 months warrant


RoHS

Product datasheet

- Rated Voltage: 240V/50Hz
- Rated Current: 13A
- Response time: <30ms
- Rated residual current: 10Ma/30mA
- Frame type: British
- Maximum connected load: 3120W
- Certification: CE&ROHS
- Protection grade for housing: IP54



RCD01 BS


AC


Easy Installation


12 months warrant


RoHS

Product datasheet

- Rated Voltage: 240V/50Hz
- Rated Current: 13A or 16A
- Response time: <30ms
- Rated residual current: 30mA
- Frame type: Germany
- Maximum connected load: 3120W
- Certification: CE&ROHS
- Protection grade for housing: IP54



RCD03 G


AC


Easy Installation


12 months warrant


RoHS

Product datasheet

- Rated Voltage: 240V/50Hz
- Rated Current: 13A or 16A
- Response time: <30ms
- Rated residual current: 30mA
- Frame type: British
- Maximum connected load: 3120W
- Certification: CE&ROHS
- Protection grade for housing: IP54



RCD03-BS