



微信二维码

网站二维码

温州正鑫管业有限公司

WENZHOU ZHENGXI PIPE FITTINGS CO., LTD

地址:浙江省温州市龙湾区星海街道金海一道624号3号楼1楼A车间、4楼A车间

电话:0577-85826866(分机808)

传真:0577-85826766

手机/微信:13968861827 13857719836

网址:www.wzzxgy.com

www.zxpipeindustry.com

Add: Workshop A, 1st Floor, Building 3 and Workshop A, 4th Floor, No. 624,
Jinhai 1st Road, Xinghai Sub-district, Longwan District,
Wenzhou City, Zhejiang Province.

Tel:0577-85826866(Ext. 808)

Fax:0577-85826766

Mobile/WeChat: 13968861827 13857719836

Http:www.wzzxgy.com

www.zxpipeindustry.com

© 此画册仅提供部分标准及数据,未表述标准可详询我司。

© 本画册图片与实物不符之处,请以实物为准,技术参数变更,恕不另行通知。



正鑫管业

EUROPEAN STANDARD SINGLE CRIMP FITTINGS
PROFESSIONAL MANUFACTURER

欧标单卡压管件
专业制造商

BECAUSE OF YOU, ZHENGXIN
HAS ACHIEVED WHAT IT IS TODAY

企业简介

温州正鑫管业有限公司成立于 2013 年 3 月份,位于国家级经济技术开发区温州市滨海工业区,毗邻温州机场温州动车站及海港码头。我公司主要致力于新型给水管路系统的研发、生产和销售。我公司开发生产的德标单卡压、日标双卡压式一系及二系、承插焊以及沟槽式快装式金属管道,深受国内外市场青睐并受到客户的一致好评。

产品主要用于城镇住宅、公共建设、旅游设施的建筑、给水排水、直接饮水、自来水管网、供气、工业设施等领域。

公司引进了 QS9000 生产管理系统,通过 ISO9001:2000 质量体系认证。在公司全体人员的努力下,公司已具备年产不锈钢管件 100 万件、不锈钢管材 1000 吨、年产值上亿的生产能力。在双卡压一系、二系及承插式、沟槽式管件热销国内同时成功打入欧美市场并客源稳定。

公司秉承“全质量服务,百年免维护、诚信第一、质量第一、用户第一、服务第一”的服务理念,精益求精。坚持创新,不断完善产品每一个细节,真正做到产品于建筑物同寿命、免维护,并以诚信、共赢、开创经营理念,创造良好的企业环境,以全新的管理模式,完善的技术,周到的服务,卓越的品质为生存根本,我们始终坚持用户至上用心服务于客户,坚持用自己的产品品质去打动客户,为缔造未来世纪的最优秀的管理系统而努力。



产品齐全 质量保证
COMPLETE PRODUCT RANGE
QUALITY GUARANTEED

生产国内各种型号阀门及配件百分百环保性价比更高
Produce various domestic - model valves and accessories.
100% environmentally friendly with higher cost - performance.



技术力量雄厚 设备先进
WITH STRONG TECHNICAL STRENGTH
AND ADVANCED EQUIPMENT

本公司拥有多年管件行业生产和销售经验的技术团队采用先进设备保证准时交货
Our company has a technical team with years of production and sales experience in the pipe fitting industry. We use advanced equipment to ensure on - time delivery.



顾客至上 免后顾之忧
CUSTOMER FIRST, ELIMINATING
ALL CONCERNS.

24小时免费提供全方位技术指导
Provide free all - round technical guidance 24 hours a day.



专业加工 定制专家
PROFESSIONAL PROCESSING,
CUSTOMIZATION EXPERT

为客户提供样品展示免费安装及快运
Professional processing, customization expert.



Wenzhou Zhengxin Pipe Industry Co., Ltd.
Established in March 2013, Wenzhou Zhengxin Pipe Industry Co., Ltd. is located in the Wenzhou Binhai Industrial Zone, a national-level economic and technological development area, adjacent to Wenzhou Airport, Wenzhou High-Speed Railway Station, and the seaport. Our company specializes in the R&D, production, and sales of innovative water supply pipeline systems. We have developed and manufactured a range of high-quality metal pipes, including German-standard single press-fit, Japanese-standard double press-fit Type 1 and Type 2, socket weld, and grooved quick-connect fittings, which have been widely acclaimed in both domestic and international markets.

Our products are primarily used in urban residential buildings, public infrastructure, tourism facilities, water supply and drainage systems, direct drinking water systems, municipal water pipelines, gas supply, and industrial applications.
The company has implemented the QS9000 production management system and is certified under the ISO9001:2000 quality management system. Through the dedication of our entire team, we have achieved an annual production capacity of 1 million stainless steel pipe fittings, 1,000 tons of stainless steel pipes, and an annual output value exceeding 100 million RMB. Our double press-fit Type 1 and Type 2 fittings, as well as socket weld and grooved pipe fittings, are not only best-sellers in China but have also successfully entered the European and American markets with a stable customer base.

Guided by the principle of "Total Quality Service, Century-Long Maintenance-Free, Integrity First, Quality First, Customer First, Service First," we continuously strive for excellence. Through innovation and meticulous attention to detail, we ensure that our products match the lifespan of buildings, requiring minimal maintenance. Upholding the values of integrity, mutual benefit, and pioneering spirit, we foster a positive corporate environment. With advanced management models, cutting-edge technology, attentive service, and superior quality as our foundation, we remain committed to putting customers first and delivering exceptional service. We take pride in winning customers' trust through the excellence of our products and are dedicated to building the finest management system for the future.



PROVEN BY QUALIFICATIONS
SETTING THE QUALITY BENCHMARK FOR WATER SUPPLY PIPES

以资质为证
铸给水管道的品质标杆

2013 年成立于温州经开区的正鑫管业，深耕新型给水管路研发产销，权威资质是其专业实力与客户承诺的证明；公司遵循国标、对接 ISO 规范，把控单 / 双卡压、承插焊、沟槽快装管道品质，全流程以资质守安全标准，而合规资质不仅确保正鑫各类金属管道达行业质量要求，让多场景客户安心，更助力其规范管理、拓展市场。

Established in Wenzhou Economic Development Zone in 2013, Zhengxin Pipe Industry has been deeply engaged in the R & D, production, and sales of new - type water supply pipelines. Authoritative qualifications are proof of its professional strength and commitment to customers. The company follows national standards and aligns with ISO specifications, strictly controlling the quality of single/double - crimping, socket - welding, and grooved quick - installation pipelines. Throughout the entire process, it adheres to safety standards with qualifications. Compliance qualifications not only ensure that Zhengxin's various metal pipelines meet industry quality requirements, reassuring customers in multiple scenarios, but also help it standardize management and expand the market.

ENGINEERING
PERFORMANCE TABLE

工程业绩表



2022.3 温州市第六人民医院二期工程温州市第六人民医院温州建设集团有限公司 304 不锈钢管及配件
台州市椒江区月湖中学月湖中学浙江金泰泳池环保设备有限公司304 不锈钢管及配件
2023.3 温州商学院三期工程温州商学院浙江高翔工程有限公司304 不锈钢管及配件
2020 年不锈钢卡压管及配件采购项目 II 标段（城区2一前进路以北片区）
牛山整治城中村改造 C-34 地块配套学校(原新桥三小) 扩建工程
河北医科大学第三医院新湘江院区一期工程
浙江安吉党校空气源热泵热水系统
温州中学扩建项目 EPC 工程
江苏真香烘焙车间装修工程
窑鸡王安徽工厂装修工程
温州金海十足项目装修工程



TECHNOLOGY
EMPOWERS QUALITY

工艺赋能品质

严选基材并经检测,确保稳定;数控加工,误差至毫米级,特殊工艺强化耐腐抗压;全流程水压、探伤等检测,瑕疵即时剔除,100%达标。管材工艺以匠心铸信,为基建安全、产业升级保驾护航。新型给水管路的可靠性,源于工艺的系统打磨,围绕“稳定供水、便捷应用”服务多场景需求。

Carefully selected base materials are tested to ensure stability. CNC processing reduces errors to the millimeter level, and special techniques enhance corrosion and pressure resistance. Full - process inspections such as hydrostatic testing and flaw detection are carried out, with defects removed immediately to ensure 100% compliance. The pipe manufacturing process builds trust with craftsmanship, safeguarding infrastructure safety and industrial upgrading. The reliability of the new water - supply pipelines comes from systematic refinement of the process, meeting the needs of multiple scenarios centered around "stable water supply and convenient application".

正鑫管业



STAINLESS STEEL PIPE
ADVANTAGE

不锈钢水管优势

薄壁不锈钢管材与传统管材的性质比较
The Nature Of The Thin-wall Stainless Steel Tubes And The Traditional Pipe

薄壁不锈钢管作为供水、供气、供油用管材与传统管材相比较具有很多优势，它洁净卫生，抗拉强度是钢管的 2 倍、铜管的 3 倍，热传导率为钢管的 1/4 、铜管的 1/25 ，能成倍减少热水输送中的热能损耗，其热胀冷缩系数是钢管的 1.5 倍、塑料管的 1/4 ，与铜管相近。具体参数见图表。

Thin-walled stainless steel pipe for water supply, gas supply, drainage pipe has many advantages compared with the traditional pipe, it is clean sanitation, it's tensile strength is twice steel pipe, 3 times of copper tube, it's thermal conductivity is 1/4 of steel tube and 1/25 of the copper tube, can reduce heat loss of hot water, doubling .Its heat bilges cold shrink coefficient is 1.5 times that of the steel pipe, a quarter of plastic pipe, close to the brass .See illustration specific parameters.

项目		不锈钢管 Stainless Steel Tube	碳钢管 Carbon Steel Pipe	铜管 Copper Pipe	PPR管 PPR Pipe
物理性 Physical Property	抗拉强度 Pull-Resistance	≥520	≥290	≥210	≥49
	热传导率 (cal/cm.s.℃) Heat Conductivity (cal/cm.s.℃)	0.039	0.142	0.934	0.00012
	保温性能 Heat Preservation Ability	优 Excellent	良 Excellent	差 Excellent	优 Excellent
耐腐蚀 Decay Resistance	耐水流腐蚀 Floeing Corrosion-resirance	优 Excellent	差 Excellent	良 Excellent	良 Excellent
	其它 Other	不腐蚀 Non-corrosion	锈蚀 Rustable	氯离子硫化物腐蚀 Etching With Chloride Lon Sulfide	紫外线照射老化 Aging At Ultraviolet Ray Irradiation
卫生环保 Sanitary ECO frienaly	污染 Pollution	无 No	锈水 Rust Water	无 No	无 No
	结垢 Crust	无 No	有 Yes	无 No	无 No
	异味 Peculiar Smell	无 No	有 Yes	无 No	无 No
	有害物析出 Injurant Separation	无800℃以上	水静止4h后	无800℃以上	无800℃以上
其他 Others	外观 Appearance	美观 Smooth	粗糙 Rough	美观 Smooth	美观 Smooth
	使用寿命 Life Circle	75年	10-30年	75年	75年

不锈钢管材与管件的材料牌号及成份
Stainless Steel Pipes And Pipe Fttings Material Mark And Composition

材料牌号 Material mark	主要材料成分(%)Main material composition							
	C碳	Si硅	Mn锰	P磷	S硫	Ni镍	Cr铬	Mo钼
06 Cr19 Ni10(S30408)	≤0.08	≤0.75	≤2.00	≤0.04	≤0.03	8.00~11.00	18.00~20.00	-
022 Cr19 Ni10(S30403)	≤0.03	≤0.75	≤2.00	≤0.04	≤0.03	8.00~12.00	18.00~20.00	-
06 Cr17 Ni12 Mo2(S31608)	≤0.08	≤0.75	≤2.00	≤0.04	≤0.03	10.00~14.00	16.00~18.00	2.00~3.00
022 Cr17 Ni12 Mo2(S31603)	≤0.03	≤0.75	≤2.00	≤0.04	≤0.03	10.00~14.00	16.00~18.00	2.00~3.00

不锈钢管材与管件的用途
Use Of Stainless Steel Pipes And Pipe Fittings

材料牌号 Material mark	用途 Application
06 Cr19 Ni10 (S30408)	冷水、热水、饮用纯净水和建筑排水等管道 Cold water, hot water, drinking water and building drainage pipeline, etc.
022 Cr19 Ni10 (S30403)	冷水、热水、饮用纯净水和建筑排水等管道 Cold water, hot water, drinking water and building drainage pipeline, etc.
06 Cr17Ni12Mo2 (S31608)	热水、耐腐蚀性比SUS304、SUS304L的要求更高的场合 The requirement of hot water, corrosion resistance than SUS304, SUS304L higher occasions
022 Cr17Ni12Mo2 (S31603)	海水、高氯介质或腐蚀性比SUS316要求更高的场合，不固溶的焊接用管道宜选材料 Sea water, chlorine medium or high corrosion resistance than SUS316 demand higher occasion, not solid solution to welding pipe appropriate chooses the material

STAINLESS STEEL
WATER SUPPLY PIPE

不锈钢配水管规格

不锈钢管材规格表
Stainless Steel Pipe Specification Table

国标 I 系列		
公称通径 (DN)	管材外径 (mm)	壁厚 (mm)
DN 15	16.0	0.8
DN 20	20.0	1.0
DN 25	25.4	1.0
DN 32	32.0	1.2
DN 40	40.0	1.2
DN 50	50.8	1.2
DN 60	63.5	1.5
DN 65	76.1	2.0
DN 80	88.9	2.0
DN 100	101.6	2.0
DN 125	133.0	2.0/2.5
DN 150	159.0	2.5/3.0
DN 200	219.0	3.0/4.0
DN 250	273.0	3.0/4.0
DN 300	325.0	4.0/4.5

水务系列		
公称通径 (DN)	管材外径 (mm)	壁厚 (mm)
DN 15	18.0	1.0
DN 20	22	1.2
DN 25	28	1.2
DN 32	35	1.5
DN 40	42	1.5
DN 50	54	1.5
DN 65	76.1	2.0
DN 80	88.9	2.0
DN 100	108.0	2.0
DN 125	133.0	2.5
DN 150	159.0	2.5
DN 200	219.0	3.0
DN 250	273.0	4.0
DN 300	325.0	4.0

欧标系列		
公称通径 (DN)	管材外径 (mm)	壁厚 (mm)
DN 15	18 (15)	1.5
DN 20	22	1.5
DN 25	28	1.5
DN 32	35	1.5
DN 40	42	1.5
DN 50	54	1.5
DN 65	76.1	2.0
DN 80	88.9	2.0
DN 100	108.0	2.0
DN 125	133.0	2.5
DN 150	159.0	2.5
DN 200	219.0	3.0
DN 250	273.0	4.0
DN 300	325.0	4.0



STAINLESS STEEL PRESS-FITTINGS PIPE FITTINGS FEATURES



不锈钢卡压式管件产品特点

节能耐用 Energy Saving And Durable

在 GB/T19228.1-2011 标准基础上优化生产。采用公司自行开发的精密模具冲压而成，经光亮固溶，再用超声波清洗处理，内外壁光滑，美观。密封圈采用卫生、抗老化的三元乙丙橡胶，严格按照 GB/T19228.3-2012 相关标准生产。

Optimizing production based on the standard of GB/T19228.1-2011. Stamping with company self-development of precision mold, then treated with ultrasonic cleaning, finally with smooth inner and outer walls, beautiful. Epdm seal uses the health, anti-aging, strictly according to GB/T19228.3-2012 standard production.

卫生环保 Health And Environmental Protection

304和316L不锈钢材料，耐腐蚀、不释放气味、不产生二次污染，是医疗、食品、输水等设备的首选材料。不锈钢水管材料使用70年后仍可100%回收，完全符合环保理念。

304 and 316L stainless steel materials are corrosion resistant, do not release odors, and do not produce secondary pollution. They are the preferred materials for medical, food, water delivery and other equipment. The stainless steel water pipe material can still be 100% recycled after 70 years of use, which is fully in line with the concept of environmental protection.

输送流畅 Conveying Fluid

管件采用先进的自动抛光处理技术，耐腐蚀性能更高减少流体阻力和流体产生的噪音，保证流体输送流畅。pipe fittings adopt advanced automatic polishing processing technology, which has higher corrosion resistance, reduces fluid resistance and fluid noise, and ensures smooth fluid delivery.

密封性能 Sealing Property

O型密封圈采用最高标准原材料制造，密封和抗老化性能达到国际DVGW质量标准。The O-ring seal is made of the highest standard raw materials, and its sealing and anti-aging performance reach the international DVGW quality standard.

不锈钢覆膜管材规格表

Stainless Steel Coated Pipe Specification Table

公称口径 (DN)	管材外径 (mm)			覆塑层厚度 (mm)	
	国标 I 系列	国标 II 系列	欧标系列	热水用管厚度	防腐管厚度
DN 15	16	15.9	18	1.8	0.4
DN 20	20	22.2	22	1.8	0.4
DN 25	25.4	28.6	28	1.8	0.4
DN 32	32	34	35	2.5	0.5
DN 40	40	42.7	42	2.5	0.5
DN 50	50.8	48.6	54	2.5	0.5
DN 60	63.5	-	-	2.5	1.2
DN 65	76.1	76.1	76.1	3	1.2
DN 80	88.9	88.9	88.9	3	1.2
DN 100	101.6	108	108	3	1.2



PIPE FITTING PROCESS FLOW CHART

管件工艺流程图



不锈钢欧标卡压管件

STAINLESS STEEL EUROPEAN STANDARD
CLAMPING PIPE FITTINGS

STAINLESS STEEL GERMAN STANDARD
SINGLE CLAMPING PIPE FITTINGS

不锈钢德标单卡压管件



不锈钢单卡压配套管
Stainless steel single press-fit pipe

公称尺寸(mm) Nominal Size	尺寸(英寸) Size (Inch)	管外径(mm) Pipe Outer Diameter	厚度(mm) thickness
15	1/2	18	1.0
20	3/4	22	1.2
25	1	28	1.2
32	1 1/4	35	1.5
40	1 1/2	42	1.5
50	2	54	1.5
65	2 1/2	76.1	2.0
80	3	88.9	2.0
100	4	108	2.0



直接套筒
straight sleeve

尺寸 size	DN	厚度 thickness
15	15x15	1.5
22	20x20	1.5
28	25x25	1.5
35	32x32	1.5
42	40x40	1.5
54	50x50	1.5
76	65x65	2.0
89	80x80	2.0
108	100x100	2.0



异径套筒
Reducer Sleeve

尺寸 size	DN	厚度 thickness
22x15	20x15	1.5
28x15	25x15	1.5
28x22	25x20	1.5
35x22	32x20	1.5
35x28	32x25	1.5
42x22	40x20	1.5
42x28	40x25	1.5
42x35	40x32	1.5
54x22	50x20	1.5
54x28	50x25	1.5
54x35	50x32	1.5
54x42	50x40	1.5
76.1x42	65x40	2.0
76.1x54	65x50	2.0
88.9x54	80x50	2.0
88.9x76.1	80x65	2.0
108x54	100x50	2.0
108x76.1	100x65	2.0
108x88.9	100x80	2.0



无档套筒
Sleeve without notch

尺寸 size	DN	厚度 thickness
15	15x15	1.5
22	20x20	1.5
28	25x25	1.5
35	32x32	1.5
42	40x40	1.5
54	50x50	1.5
76	65x65	2.0
89	80x80	2.0
108	100x100	2.0

STAINLESS STEEL GERMAN STANDARD
SINGLE CLAMPING PIPE FITTINGS

不锈钢德标单卡压管件



外螺纹套筒
Male threaded sleeve



内螺纹套筒
Female threaded sleeve



90度弯头A
90-degree elbow Type A



45度弯头A
45-Degree Elbow Type A

尺寸 size	DN	厚度 thickness
15x1/2	15x15	1.5
15x3/4	15x20	1.5
22x1/2	20x15	1.5
22x3/4	20x20	1.5
22x1	20x25	1.5
28x3/4	25x20	1.5
28x1	25x25	1.5
35x1	32x25	1.5
35x1 1/2	32x32	1.5
42x1 1/2	40x40	1.5
54x2	50x50	1.5
76.1x2 1/2	65x65	2.0
88.9x3	80x80	2.0

尺寸 size	DN	厚度 thickness
15x1/2	15x15	1.5
15x3/4	15x20	1.5
22x1/2	20x15	1.5
22x3/4	20x20	1.5
22x1	20x25	1.5
28x3/4	25x20	1.5
28x1	25x25	1.5
35x1	32x25	1.5
35x1 1/2	32x32	1.5
42x1 1/2	40x40	1.5
54x2	50x50	1.5

尺寸 size	DN	厚度 thickness
15	15x15	1.5
22	20x20	1.5
28	25x25	1.5
35	32x32	1.5
42	40x40	1.5
54	50x50	1.5
76	65x65	2.0
89	80x80	2.0
108	100x100	2.0

尺寸 size	DN	厚度 thickness
15	15x15	1.5
22	20x20	1.5
28	25x25	1.5
35	32x32	1.5
42	40x40	1.5
54	50x50	1.5
76	65x65	2.0
89	80x80	2.0
108	100x100	2.0

STAINLESS STEEL GERMAN STANDARD
SINGLE CLAMPING PIPE FITTINGS

不锈钢德标单卡压管件



90度弯头B
90-Degree Elbow Type B



45度弯头B
45-Degree Elbow Type B



异径弯头
Reducing Elbow



90度外螺纹弯头
90° male threaded elbow

尺寸 size	DN	厚度 thickness
15	15x15	1.5
22	20x20	1.5
28	25x25	1.5
35	32x32	1.5
42	40x40	1.5
54	50x50	1.5
76	65x65	2.0
89	80x80	2.0
108	100x100	2.0

尺寸 size	DN	厚度 thickness
15	15x15	1.5
22	20x20	1.5
28	25x25	1.5
35	32x32	1.5
42	40x40	1.5
54	50x50	1.5
76	65x65	2.0
89	80x80	2.0
108	100x100	2.0

尺寸 size	DN	厚度 thickness
22X15	20X15	1.5
28X22	25X20	1.5
35X28	32X25	1.5
42X35	40X32	1.5
54X42	50X40	1.5
76.1X54	65X50	2.0
88.9X76.1	80X65	2.0
108X88.9	100X80	2.0

尺寸 size	DN	厚度 thickness
15x1/2	15x15	1.5
15x3/4	15x20	1.5
22x1/2	20x15	1.5
22x3/4	20x20	1.5
22x1	20x25	1.5
28x3/4	25x20	1.5
28x1	25x25	1.5
35x1	32x25	1.5
35x1 1/2	32x32	1.5
42x1 1/2	40x40	1.5
54x2	50x50	1.5
76.1x2 1/2	65x65	2.0
88.9x3	80x80	2.0

STAINLESS STEEL GERMAN STANDARD
SINGLE CLAMPING PIPE FITTINGS

不锈钢德标单卡压管件



内螺纹弯头
Female Threaded Elbow

尺寸 size	DN	厚度 thickness
18x1/2	15x1/2	1.5
22x1/2	20x1/2	1.5
22x3/4	20x3/4	1.5



异径三通
Reducing Tee

尺寸 size	DN	厚度 thickness
22x15x22	20x15x20	1.5
28x15x28	25x15x25	1.5
35x22x35	32x20x32	1.5
35x28x35	32x25x32	1.5
42x22x42	40x20x40	1.5
42x28x42	40x25x40	1.5
42x35x42	40x32x40	1.5
54x22x54	50x20x50	1.5
54x28x54	50x25x50	1.5
54x35x54	50x32x50	1.5
54x45x54	50x42x50	1.5
76.1x22x76.1	65x20x65	2.0
76.1x28x76.1	65x25x65	2.0
76.1x35x76.1	65x32x65	2.0
76.1x42x76.1	65x40x65	2.0
76.1x54x76.1	65x50x65	2.0
88.9x22x88.9	80x20x80	2.0
88.9x28x88.9	80x25x80	2.0
88.9x35x88.9	80x32x80	2.0
88.9x42x88.9	80x40x80	2.0
88.9x54x88.9	80x50x80	2.0
88.9x76.1x88.9	80x65x80	2.0
108x22x108	100x20x100	2.0
108x28x108	100x25x100	2.0
108x35x108	100x32x100	2.0
108x42x108	100x40x100	2.0
108x54x108	100x50x100	2.0
108x76.1x108	100x65x100	2.0
108x88.9x108	100x80x100	2.0



等径三通
Straight Tee

尺寸 size	DN	厚度 thickness
15	15x15	1.5
22	20x20	1.5
28	25x25	1.5
35	32x32	1.5
42	40x40	1.5
54	50x50	1.5
76	65x65	2.0
89	80x80	2.0
108	100x100	2.0



外螺纹三通
Male Threaded Tee

尺寸 size	DN	厚度 thickness
22x1/2	20x15	1.5
22x3/4	20x20	1.5
28x1/2	25x15	1.5
28x1	25x25	1.5
35x1/2	32x15	1.5
35x1 1/4	32x32	1.5
42x1 1/4	40x32	1.5
54x1 1/4	50x40	1.5
54x2	50x50	1.5

STAINLESS STEEL GERMAN STANDARD
SINGLE CLAMPING PIPE FITTINGS

不锈钢德标单卡压管件



外螺纹异径三通
Male Threaded Reducing Tee

尺寸 size	DN	厚度 thickness
15x1/2x15	15x15x15	1.5
22x1/2x22	20x15x20	1.5
22x3/4x22	20x20x20	1.5
28x1/2x28	25x15x25	1.5
28x3/4x28	25x20x25	1.5
35x1/2x35	32x15x32	1.5
35x3/4x35	32x20x32	1.5
42x1/2x42	40x15x40	1.5
42x3/4x42	40x20x40	1.5
54x1/2x54	50x15x40	1.5
54x3/4x54	50x20x50	1.5
76.1x3/4x76.1	65x20x65	2.0
88.9x3/4x88.9	80x20x80	2.0
108x3/4x108	100x20x100	2.0



内螺纹弯头带座
Female Threaded Elbow
with Bracket

尺寸 size	DN	厚度 thickness
15x1/2	15x15	1.5
22x3/4	20x20	1.5



内螺纹活接
Female Threaded Union

尺寸 size	DN	厚度 thickness
15	15x1/2	1.5
22	20x3/4	1.5
28	25x15	1.5
35	32x1 1/4	1.5
42	40x1 1/2	1.5
54	50x2	1.5
76	65x2 1/2	2.0
89	80x3	2.0
108	100x4	2.0



管桥
Pipe Bridge

尺寸 size	DN	厚度 thickness
18	1/2	1.5
22	3/4	1.5
22	1	1.5

GB STAINLESS STEEL
DOUBLE PRESS-FITTINGPIPE FITTINGS
国标不锈钢双卡压式管件



主管通径D	支管通径D1	DN15	DN20	DN25	DN32	DN40	DN50	DN60	DN65	DN80
DN20										
DN25										
DN32										
DN40										
DN50										
DN60										
DN65										
DN80										
DN100										



主管通径	管螺纹RP, RC	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN15							
DN20							
DN25							
DN32							
DN40							
DN50							
DN60							
DN65							
DN80							
DN100							



主管通径	管螺纹RP, R	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN15							
DN20							
DN25							
DN32							
DN40							
DN50							



公称通径 DN	
DN15	DN50
DN20	DN60
DN25	DN65
DN32	DN80
DN40	DN100

UNION
SERIES
活接系列



外丝活接弯头
External thread flexible joint elbow
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

内丝活接三通
Internal thread connecting tee
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

内丝活接弯头
Inner wire flexible joint elbow
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6



外丝活接三通
External thread union tee
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

内丝带垫活接
Inner ribbon cushion flexible joint
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6



球型活接
Ball joint
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

内外丝活接
Internal and external wire joint
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

双外丝活接
Double outer wire union
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6



对焊活接
Welding joint
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

一头内丝一头焊接活接
One end of inner wire and one end of welded joint
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

一头外丝一头焊接活接
One end of outer wire and one end of welded joint
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

INNER AND OUTER THREADS AND
PIPE CAP ACCESSORIES SERIES
内外丝及管帽附件系列



内丝
Internal
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

内外丝
Inner and outer threads
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

焊接外丝
Welding outer wire
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

活动内丝
Activity silk
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6



变径内外丝
Variable diameter inner and outer threads
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

变径内外丝
Variable diameter inner and outer threads
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

变径内丝
Variable diameter inner wire
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

变径外丝
Variable diameter outer thread
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6




六角内外丝
Hexagonal inner and outer wire
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

变径六角内外丝
Variable diameter hexagonal inner and outer threads
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

六角外丝
Hexagonal outer wire
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

六角焊接内丝
Hexagonal welding inner wire
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

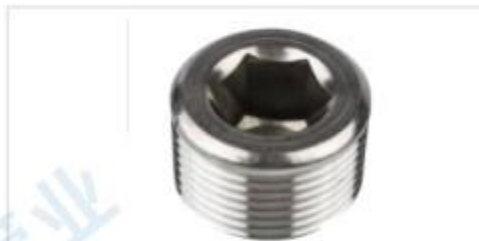

外六角塞头
Outer hexagonal plug
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

管帽
Pipe cap
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

塞头
Plug head
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

内六角塞头
Hexagonal plug head
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6



补芯
Bushing
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

水箱接头
Water tank connector
材质:不锈钢201/304/316L/2205等
口径:1/8"-4"(DN6-DN100)
压力:PN1.6

WATER SUPPLY AND DRAINAGE PIPE FITTINGS 给排水管道配件



承插焊斜三通
Socket welding oblique tee



排水P弯
Drain P bend



排水H管
Drain H pipe



不锈钢法兰
Stainless steel flange



不锈钢法兰
Stainless steel flange



沟槽TY三通
Groove TY tee



快装式检查口
Quick loading inspection port



偏心异径大小头
Eccentric reducing head



不锈钢法兰
Stainless steel flange



不锈钢法兰
Stainless steel flange



45°斜三通
45° Oblique tee



异径TY三通
Reducing TY tee



90°顺水三通
90° Shun water tee



伸缩式补偿器
Telescopic compensator




由任
By ren



透气帽
Breathable cap



侧墙透气帽
Side wall breathable cap

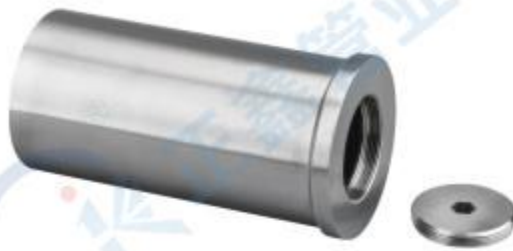

立管清扫口
Stand pipe cleaning port



不锈钢分水器
Stainless Steel Water Separator

规格

- WRM DN 50×3/4"×(2-8)
- WRM DN 50×1/2"×(2-8)
- WRM DN 40×3/4"×(2-8)
- WRM DN 40×1/2"×(2-8)
- WRM DN 32×3/4"×(2-8)
- WRM DN 32×1/2"×(2-8)
- WRM DN 25×3/4"×(2-8)
- WRM DN 25×1/2"×(2-8)

注:分水器属于定制件，
具体规格及型号根据客户要求生产



PRESS-FITTINGS
CONNECTION TOOL

卡压管件和管材连接安装工具



电动液压泵
(适用于工装的工具套装)
Electric hydraulic pump
(Tool set suitable for tooling)



自动压接工具A型
(适用于家装)
Automatic crimping tool type A
(Suitable for home improvement)



油管4-6米
Tubing 4-6 meters



大钳座
Large clamp seat

工具名称	压接规格	压接钳口、环模
电动液压泵	DN15-100	配油管4-6米
小钳座	DN15-25	配小钳口DN15、20、25
中钳座	DN32-50	配中钳口DN32、40、50
大钳座	DN60-100	配环模DN60、65、80、100

钳口规格	钳口名称
DN15	剪刀式钳口DN15
DN20	剪刀式钳口DN20
DN25	剪刀式钳口DN25
DN32	剪刀式钳口DN32
DN40	连接座+环模DN40
DN50	连接座+环模DN50



INSTALLATION
METHOD

安装方法



WATER SUPPLY AND
DRAINAGE PIPE FITTINGS(VAIVE)

给排水管道配件(阀门)



法兰止回阀
Flange check valve



内螺纹闸阀
Internal thread gate valve



法兰闸阀
Flange gate valve



Y型内螺纹过滤器
Y Type internal thread filter



内螺纹旋启止回阀
Internal thread swing check valve



内螺纹截止阀
Internal thread globe valve



法兰截止阀
Flange globe valve



一片式内螺纹球阀
One-piece internal thread ball valve



二片式内螺纹球阀
Two-piece internal thread ball valve



三片式内螺纹球阀
Three-piece internal thread ball valve



电动薄型法兰球阀
Electric thin flange ball valve



止回阀
Check valve



U型螺栓
U bolt



排卡
Row card



排卡
Row card



排卡
Row card



支架D (支架管卡)
Bracket D (bracket pipe clamp)



管夹
Pipe clamp



支架B (拉爆管卡)
Bracket B (explosive tube card)



波纹软管
Corrugated hose

应用范围 APPLICATION RANGE

广泛适用于城镇住宅的给水排水系统、公共建筑的直饮水供应网络、旅游酒店的供暖与燃气输送管路，以及城市水务管网、工业设施流体输送、消防工程管路等众多领域



APPLICATION

专注 CONCENTRATION

公司引进了 QS9000 生产管理系统, 通过 ISO9001:2000 质量体系认证。
在公司全体人员的努力下, 公司已具备年产不锈钢管件 100 万件、不锈钢管材 1000 吨、年产值上亿的生产能力。



创新 INNOVATION

公司秉承“全质量服务, 百年免维护、诚信第一、质量第一、用户第一、服务第一”的服务理念, 精益求精。
坚持创新, 不断完善产品每一个细节,
真正做到产品于建筑物同寿命、免维护, 并以诚信、共赢、开创经营理念!

