


M Series




Product selection

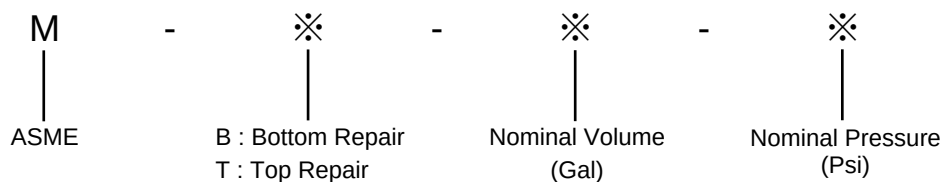


Specification

1. Construction : Bottom repair, top repair
2. Fixation way : Clamp or bracket.
3. Installation : vertical.
4. Medium : Hydraulic oil, emulsion.
5. Operating temperature : -10~+93℃.
6. Gas charged in the bladder : Nitrogen.

Model Code and Size(ASME)

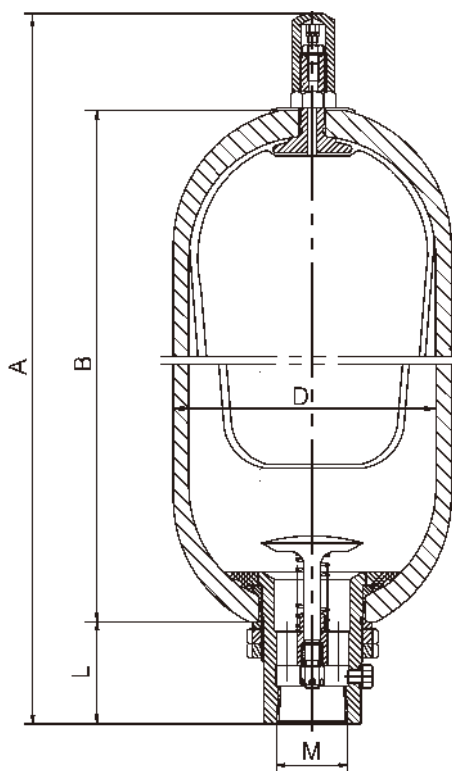

Bottom Repair Construction

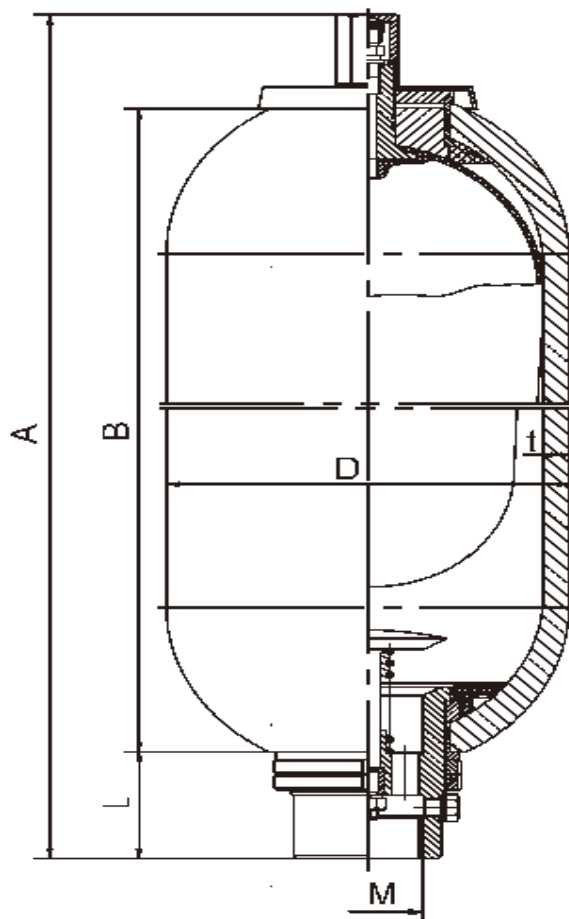

Top Repair Construction

Model Code	Pressure	Volume		Weight		Size(mm)				
	Psi	Gal	L	Lbs	Kg	D (mm)	L (mm)	A (mm)	B (mm)	M (NPT)
MB0.25/3000	3000	0.25	1	11	5	Φ114	50	325	195	3/4"
MB1/3000		1	4	32	14.5	Φ168	60	385	315	1 1/4"
MB2.5/3000		2.5	10	95	43	Φ229	87	585	425	2"
MB5/3000		5	19	140	64			865	710	
MB10/3000		10	38	230	104			1435	1280	
MB11/3000		11	42	240	109			1540	1385	
MB14/3000		14	53	276	126			1875	1720	
MB15/3000		15	57	290	132			1985	1830	
MT2.5/3000		2.5	10	95	43			580	420	
MT5/3000		5	19	140	64			855	710	
MT10/3000		10	38	230	104			1425	1280	
MT11/3000		11	42	240	109			1530	1385	
MT14/3000		14	53	276	126			1865	1720	
MT15/3000		15	57	290	132			1975	1830	
MT16/3000		16	63	380	171	Φ299	106	1485	1305	2-1/2"
MT21/3000		21	80	473	213			1825	1645	
MT26/3000		26	100	562	253			2205	2025	
MT17/3000		17	63	377	170	Φ351	110	1185	985	3"
MT21/3000		21	80	457	206			1410	1210	
MT26/3000		26	100	555	250			1675	1475	
MT33/3000		33	125	675	304			2005	1805	
MT39/3000		39	150	791	356			2325	2125	
MT48/3000		48	180	933	420			2715	2515	
MT53/3000		53	200	1035	466			2995	2795	
MB0.25/4500	4500	0.25	1	12	5.5	Φ114	50	325	195	3/4"
MB1/4500		1	4	44	20	Φ168	60	385	315	1 1/4"
MB2.5/4500		2.5	10	128	58	Φ232	87	585	425	2"
MB5/4500		5	19	185	84			855	700	
MB10/4500		10	38	300	136			1435	1280	
MB11/4500		11	42	322	146			1540	1385	
MB14/4500		14	53	392	178			1935	1780	
MB15/4500		15	57	403	183			2005	1850	
MT2.5/4500		2.5	10	128	58			545	400	
MT5/4500		5	19	185	84			845	700	
MT10/4500		10	38	300	136			1425	1280	
MT11/4500		11	42	322	146			1530	1385	
MT14/4500		14	53	392	178			1925	1780	
MT15/4500		15	57	403	183			1995	1850	
MT16/4500		16	61	422.4	192	Φ299	74	1460	1280	2-1/2"
MT21/4500		21	80	510.4	232			1800	1620	
MT26/4500		26	100	602.8	274			2180	2000	
MT2.5/5000	5000	2.5	10	90.6	41	Φ232	87	580	420	2"
MT5/5000		5	19	169	76			860	700	
MT6.4/5000		6.4	24	181.6	82.2			1002	857	
MT10/5000		10	38	267	121			1425	1280	
MT11/5000		11	42	276	125			1530	1385	

1. Ordering note : If you have special requirements, please contact our company for advice.