


## Differential pressure indicator

|                                                                                  |                    |                                        |
|----------------------------------------------------------------------------------|--------------------|----------------------------------------|
|  | Selection code     | CL                                     |
|                                                                                  | Product type       | Visual and electrical indicators       |
|                                                                                  | Pressure setting   | 2 bar, 5 bar $\pm 10\%$                |
|                                                                                  | Work pressure      | 420 bar                                |
|                                                                                  | Temperature range  | -30 °C to +100 °C                      |
|                                                                                  | Connection thread  | G 1/2                                  |
|                                                                                  | Maximum torque     | 100 Nm                                 |
|                                                                                  | Applicable voltage | 24 V                                   |
|                                                                                  | Applicable type    | Online differential pressure detection |
|                                                                                  | Product model      | FD 5 CL.1-LED                          |

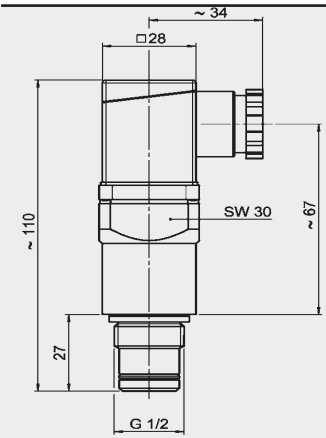