


PV Combiner Box LQT Series

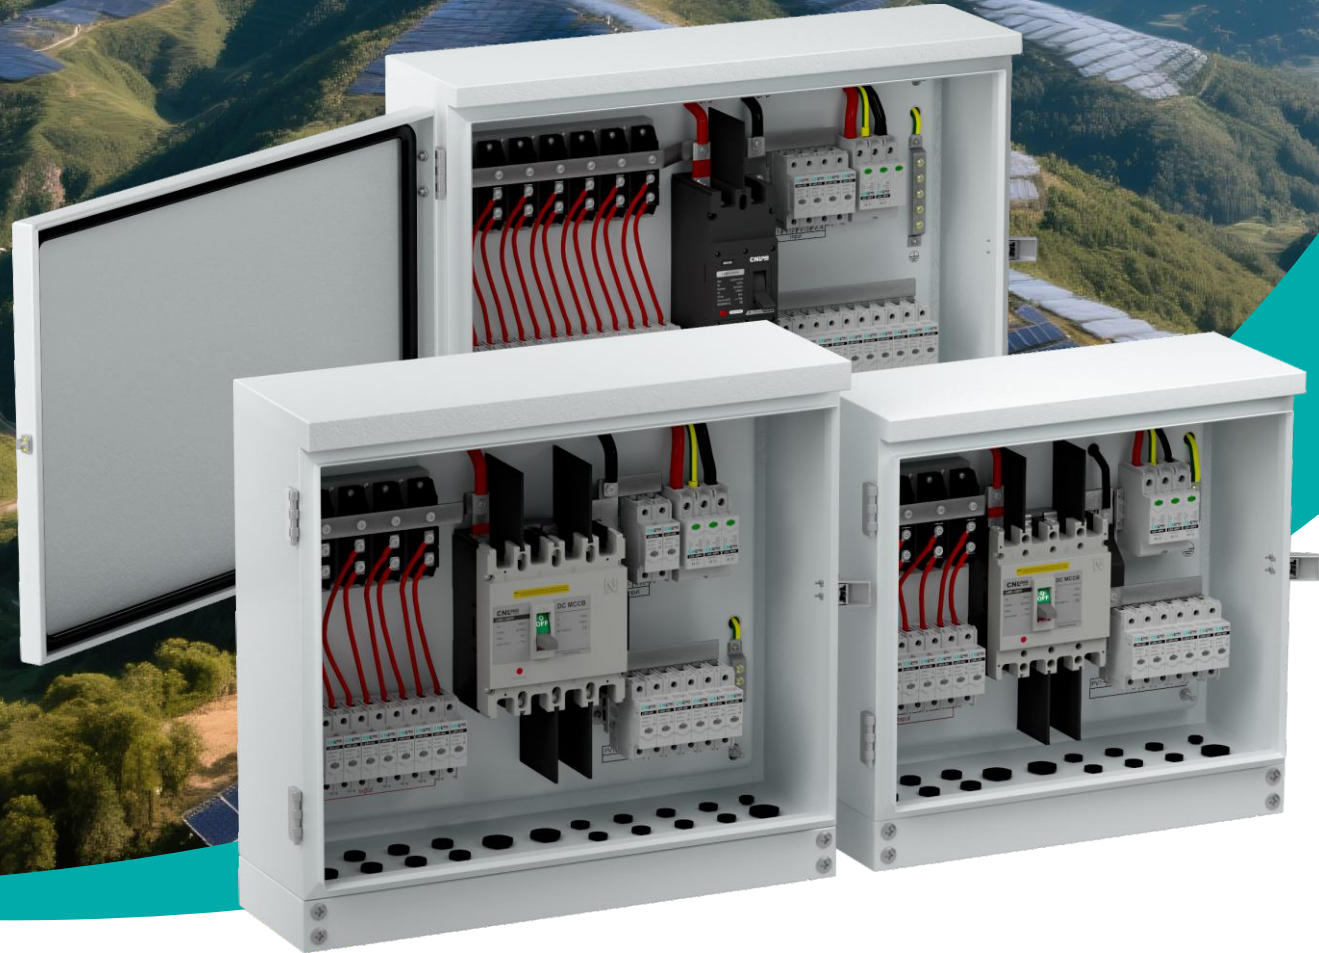

DC500V~1500V 16~800A input1~32 output1~32

CNLONGQ Photovoltaic combiner boxes are reliable components for solar power plants and rooftop systems. They feature DC overcurrent protection, surge suppression, and fuse short-circuit protection. IP65+ protection rating. Photovoltaic combiner boxes serve as the critical hub for connecting multiple solar panels in series to the inverter. They consolidate DC power while providing essential protection and monitoring to maximize system safety, efficiency, and return on investment.

- 

IP65 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 

Metal housing, IK10 impact resistance, flame retardant, corrosion resistant
- 


OEM/ODM Free Customization for PV Products

Company Profile

Wenzhou Longqi New Energy Co., Ltd. (Brand: CNLONGQ)

Founded In 2010 And Headquartered In Yueqing, Wenzhou—China’S Electrical Capital—Wenzhou Longqi New Energy Co., Ltd. Is A Leading Innovator In Photovoltaic System Components And Electrical Protection Equipment. We Specialize In Designing, Manufacturing, And Globally Distributing High-Performance Products Essential For Efficient, Safe Solar Power Generation Systems.

The Company’S Main Factory Covers **10,000m²** With An Additional **2,500m²** Of Warehouse Space. We Support Oem/Odm And Custom Junction Box Solutions, Holding Over **100 Project Certifications And Patents With A Team Of More Than 50 Technical Personnel**. Driven By Innovation And Stringent Quality Control, We Welcome Your Partnership In Building A Cleaner Energy Future Together.

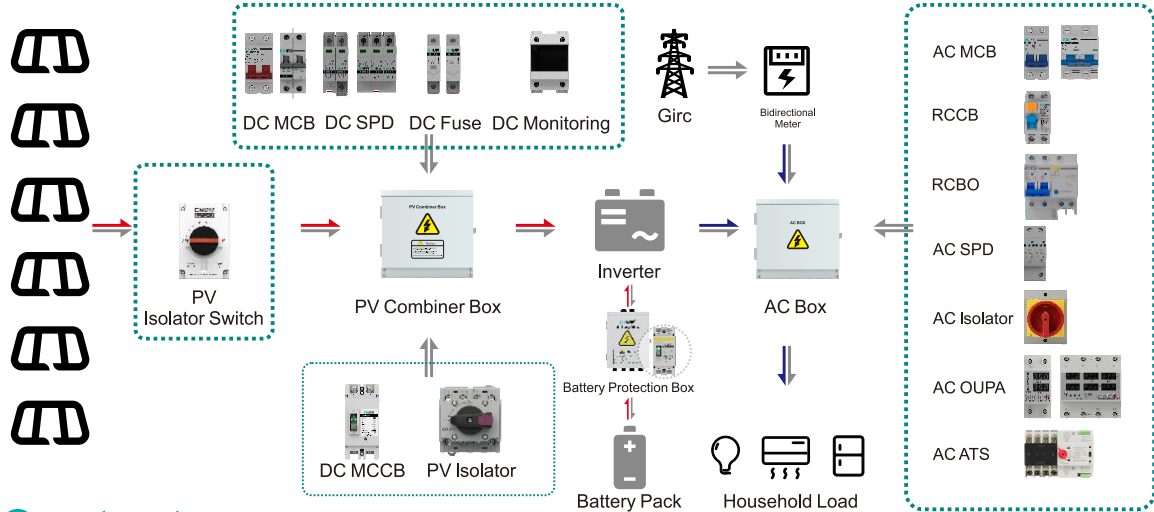

Contents

LQX4/1DC1000VM1 1000VM3/1500VM3	1	LQX4/4DC500VB1 500VL7	21
LQX6/1DC1000VM1 1000VM3/1500VM3	3	LQX4/4DC1000VB1 1000VL7/1000VQ	23
LQX8/1DC1000VM1 1000VM3/1500VM3	5	LQX5/5DC1000VB1 1000VL7/1000VQ	25
LQX10/1DC1000VM1 1500VM3	7	LQX6/6DC1000VQ 1000VB1/1000VL7	27
LQX12/1DC1000VM1 1500VM3	9	LQX8/8DC1000VQ 1000VB1/1000VL7	29
LQX14/1DC1000VM3 1500VM3	11	LQX10/10DC1000VQ 1000VB1/1000VL7	31
LQX16/1DC1000VM3 1500VM3	13	LQX12/12DC1000VQ 1000VB1/1000VL7	33
LQX18/1DC1000VM3 1500VM3	15	LQX6/2DC1000VM1 1000VM3/1500VM3	35
LQX20/1DC1000VM3 1500VM3	17		
LQX24/1DC1000VM3 1500VM3	19		

Tips: Metal PV combiner boxes are available in any custom size; this catalog lists only the most common models. Please contact us for additional specifications and custom orders.


LQT4/1

CE ISO 9001 R&HS IEC IP65

CN LONGQ.com

PV Combiner Box 4in 1out

DC 1000V

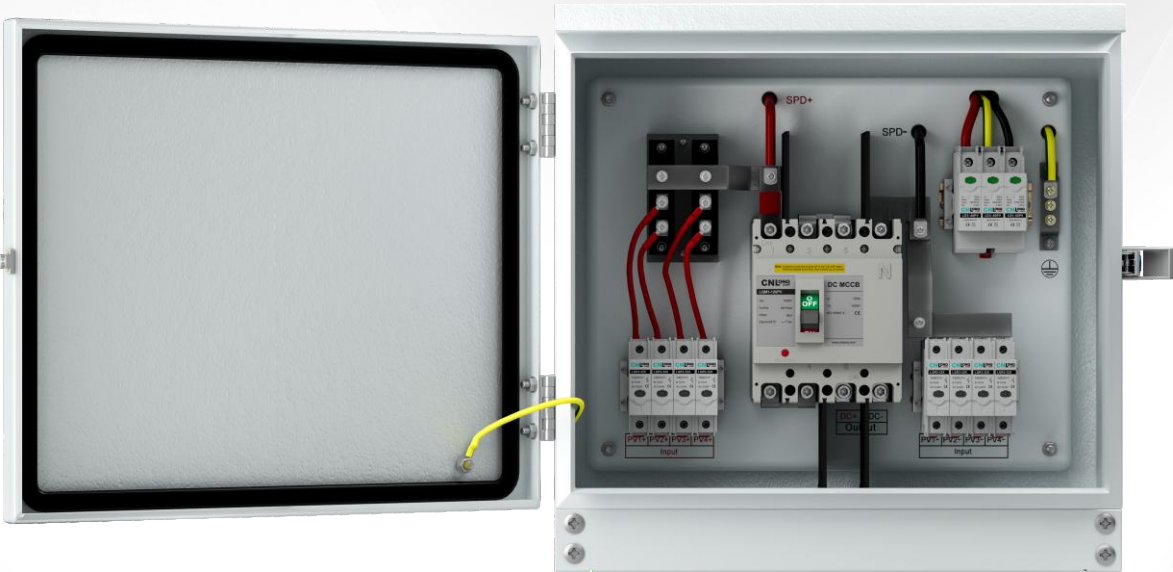

LQT4/1DC1000VM1-XF



IP65 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant




OEM/ODM Free Customization for PV Products

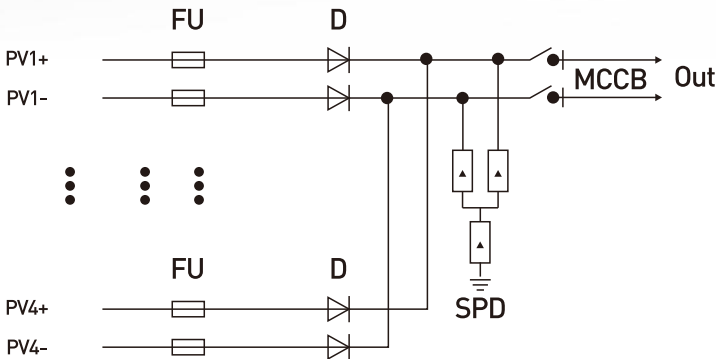

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

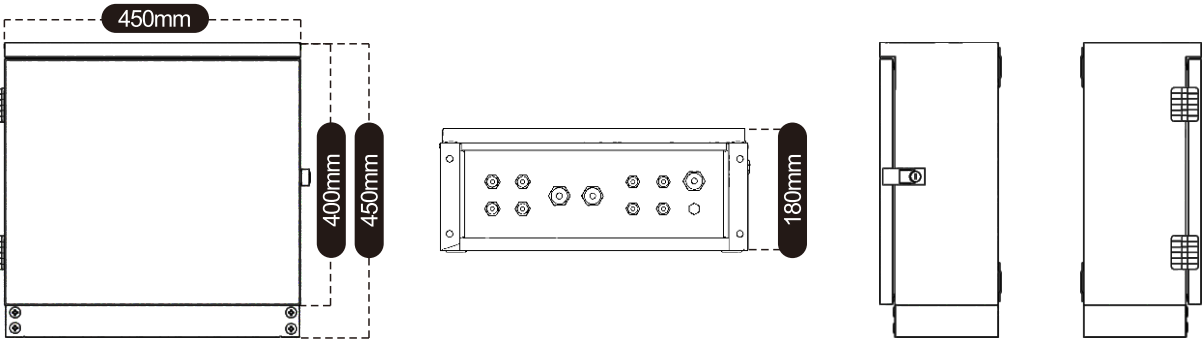

Technical data	
Model	LQT4/1DC1000VM1-XF DC1000VM3-XF DC1500VM3-XF
String	4 in 1 out
Rated Voltage Ue (V)	DC 1000 DC1000 DC1500
Maximum input current per string (A)	15/20/25/30 15/20/25/30 15~50
Maximum output current per string (A)	63/80/100/125 63~320 63~320
Quality Certificate	CE,ISO9001,RoHS,IP65
Protection Level	IP65
Impact Level	IK10
Box Material	Cold-rolled steel
Operating Temperature	-25°C ~ +60°C
Humidity	≤95%
Connector	MC4 or PG
Installation	Wall Mounting
Altitude	2000m
Dimension	450*450*180mm
MCCB(M1) or MCCB(M3 DC1000V) or MCCB(M3 1500V)	
Rated Voltage Ue (V)	DC1000 Rated Voltage Ue (V) DC1000 Rated Voltage Ue (V) DC1500
Ui (V)	DC1600 Ui (V) DC1250 Ui (V) DC1500
Rated Current In(A)	63~125 Rated Current In(A) 63~320 Rated Current In(A) 63~800
Icu (kA)	20 Icu (kA) 20 Uimp (kV) 20
standard	IEC 60947-2 standard IEC 60947-2 standard IEC 60947-2
SPD Fuse LQR3-32 or LQR6-35 or LQR8-50	
Rated Voltage Ue (V)	DC1000/1500 Rated Voltage Ue (V) DC1000 DC1500 DC1500
In (8/20)us (kA)	20 Rated Current In(A) 1~30 1~35 1~50
Imax (8/20)us (kA)	40 Fuse Size (mm) 10*38 10*65 10*85/14*85
Protection Level (kV)	3.6 Standard IEC60269 IEC60269 IEC60269
standard	IEC 61643-31


LQT6/1

CE ISO 9001 R&HS IEC IP65

CN LONG.com

PV Combiner Box 6in 1out

DC 1000V

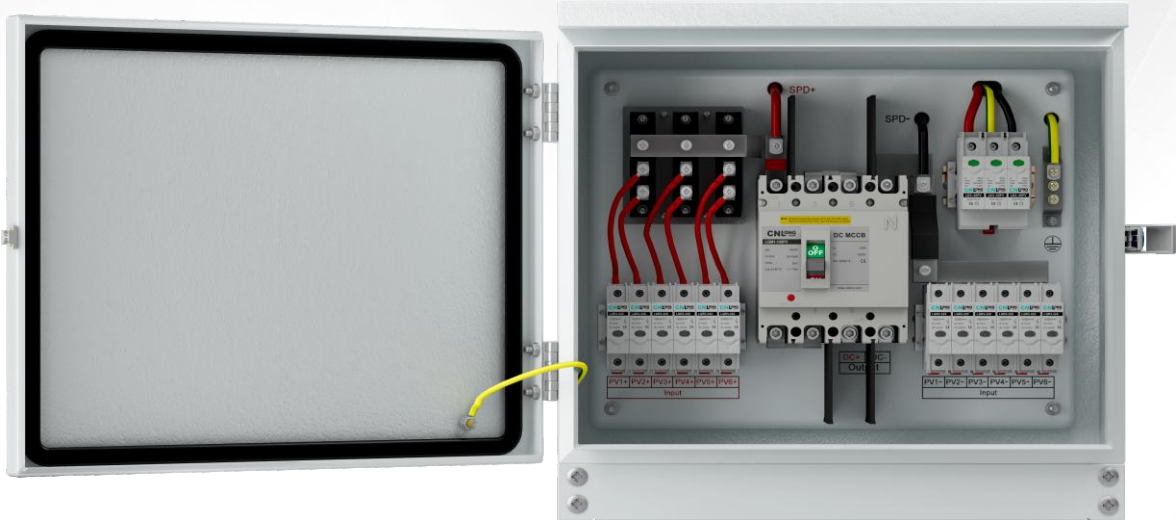

LQT6/1DC1000VM1-XF


- 

IP65 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

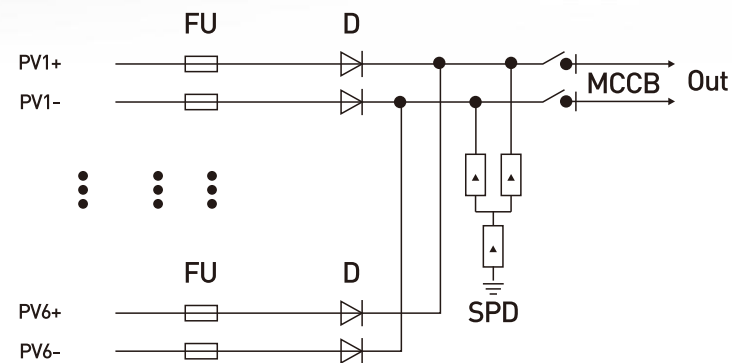

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

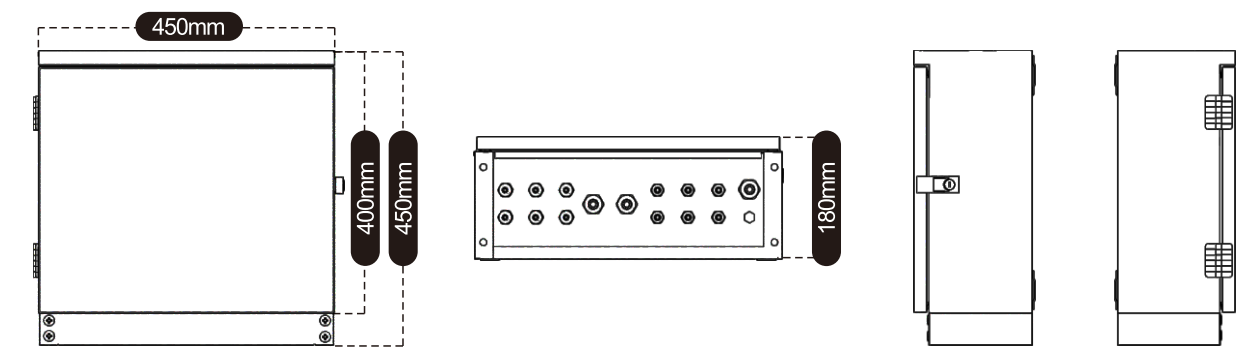

Technical data		
Model	LQT6/1DC1000VM1-XF	DC1000VM3-XF DC1500VM3-XF
String	6 in 1 out	
Rated Voltage Ue (V)	DC 1000	DC1000 DC1500
Maximum input current per string (A)	15/20/25/30	15/20/25/30 15~50
Maximum output current per string (A)	63/80/100/125	63~320 63~320
Quality Certificate	CE,ISO9001,RoHS,IP65	
Protection Level	IP65	
Impact Level	IK10	
Box Material	Cold-rolled steel	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Wall Mounting	
Altitude	2000m	
Dimension	450*450*180mm	
MCCB(M1) or MCCB(M3 DC1000V) or MCCB(M3 1500V)		
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V) DC1000 Rated Voltage Ue (V) DC1500
Ui (V)	DC1600	Ui (V) DC1250 Ui (V) DC1500
Rated Current In(A)	63~125	Rated Current In(A) 63~320 Rated Current In(A) 63~800
Icu (kA)	20	Icu (kA) 20 Uimp (kV) 20
standard	IEC 60947-2	standard IEC 60947-2 standard IEC 60947-2
SPD Fuse LQR3-32 or LQR6-35 or LQR8-50		
Rated Voltage Ue (V)	DC1000/1500	Rated Voltage Ue (V) DC1000 DC1500 DC1500
In (8/20)us (kA)	20	Rated Current In(A) 1~30 1~35 1~50
Imax (8/20)us (kA)	40	Fuse Size (mm) 10*38 10*65 10*85/14*85
Protection Level (kV)	3.6	Standard IEC60269 IEC60269 IEC60269
standard	IEC 61643-31	

LQT8/1

CE


RoHS

IEC

IP65

PV Combiner Box 8in 1out

DC 1000V

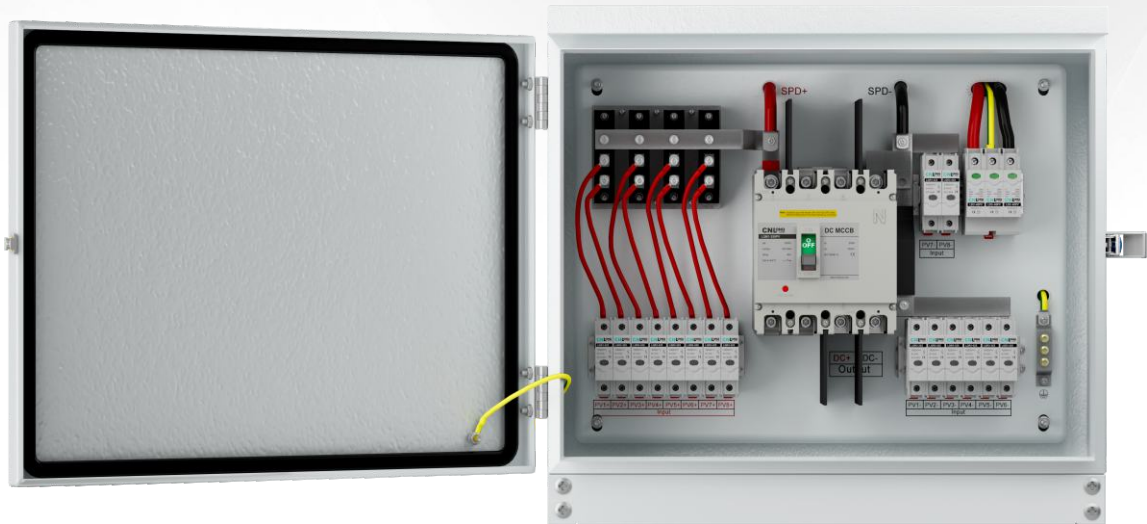

LQT8/1DC1000VM1-XF


- 

IP65 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

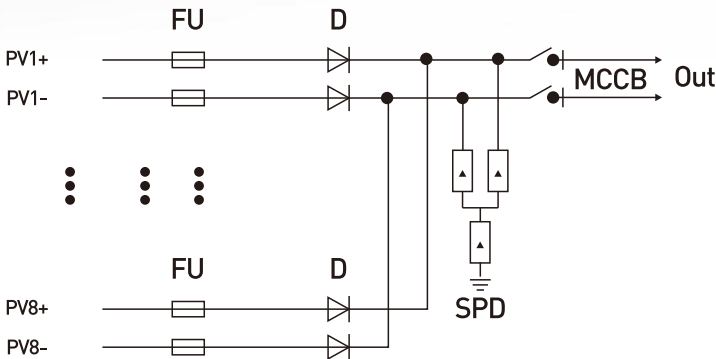

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

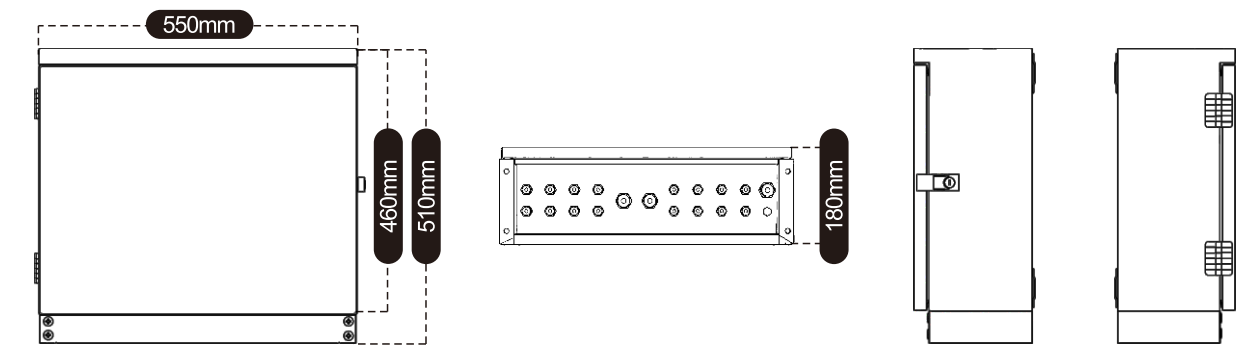

Technical data					
Model	LQT8/1DC1000VM1-XF DC1000VM3-XF DC1500VM3-XF				
String	8 in 1 out				
Rated Voltage Ue (V)	DC 1000 DC1000 DC1500				
Maximum input current per string (A)	15/20/25/30 15/20/25/30 15~50				
Maximum output current per string (A)	160/180/200/225/250 63~320 63~320				
Quality Certificate	CE,ISO9001,RoHS,IP65				
Protection Level	IP65				
Impact Level	IK10				
Box Material	Cold-rolled steel				
Operating Temperature	-25°C ~ +60°C				
Humidity	≤95%				
Connector	MC4 or PG				
Installation	Wall Mounting				
Altitude	2000m				
Dimension	510*550*180mm				
MCCB(M1)		or	MCCB(M3 DC1000V)		or MCCB(M3 1500V)
Rated Voltage Ue (V)	DC1000		Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V) DC1500
Ui (V)	DC1600		Ui (V)	DC1250	Ui (V) DC1500
Rated Current In(A)	160~250		Rated Current In(A)	63~320	Rated Current In(A) 63~800
Icu (kA)	20		Icu (kA)	20	Uimp (kV) 20
standard	IEC 60947-2		standard	IEC 60947-2	standard IEC 60947-2
SPD		Fuse	LQR3-32	or LQR6-35	or LQR8-50
Rated Voltage Ue (V)	DC1000/1500	Rated Voltage Ue (V)	DC1000	DC1500	DC1500
In (8/20)us (kA)	20	Rated Current In(A)	1~30	1~35	1~50
Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38	10*65	10*85/14*85
Protection Level (kV)	3.6	Standard	IEC60269	IEC60269	IEC60269
standard	IEC 61643-31				


LQT10/1

CE ISO 9001 RoHS IEC IP65

CNLong.com


PV Combiner Box 10in 1out

DC 1000V

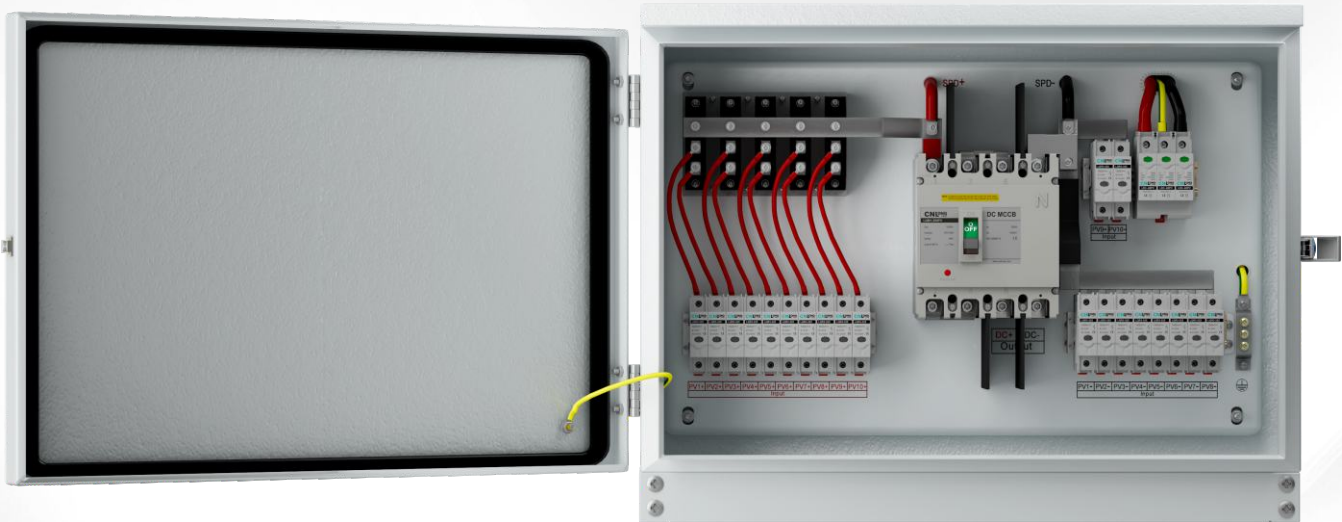


LQT10/1DC1000VM1-XF

- IP65 outdoor waterproof and sun resistant UV-resistant
- Short-circuit protection, overload protection, lightning protection, Isolation circuit
- Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- OEM/ODM Free Customization for PV Products

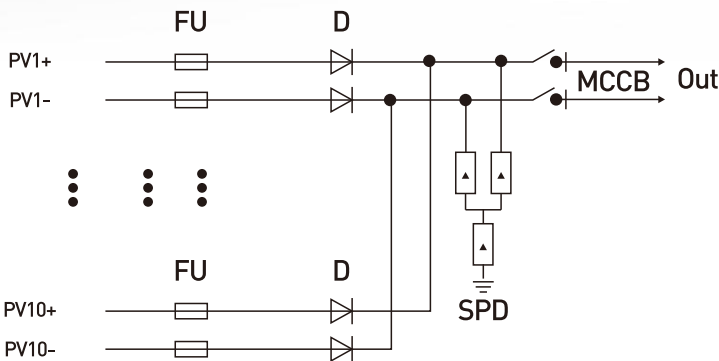

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

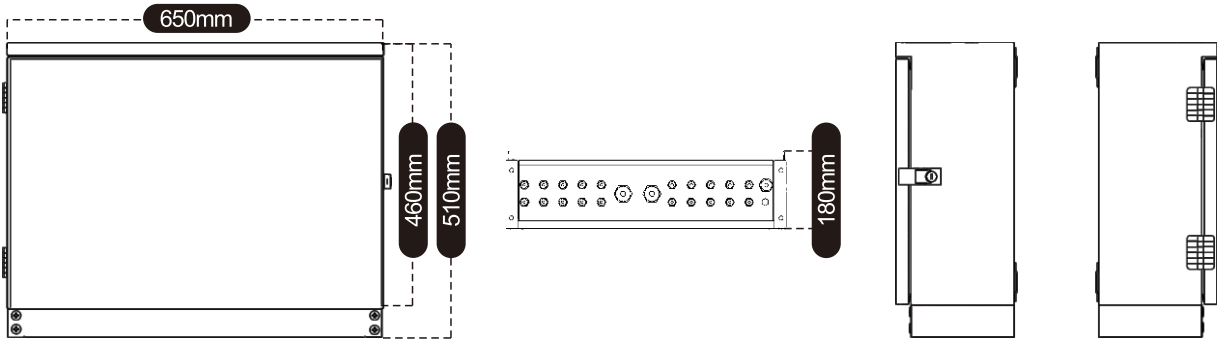

Technical data								
Model		LQT10/1DC1000VM1-XF		DC1000VM3-XF	DC1500VM3-XF			
String		10 in 1 out						
Rated Voltage Ue (V)		DC 1000		DC1000	DC1500			
Maximum input current per string (A)		15/20/25/30		15/20/25/30	15~50			
Maximum output current per string (A)		160/180/200/225/250		63~320	63~320			
Quality Certificate		CE,ISO9001,RoHS,IP65						
Protection Level		IP65						
Impact Level		IK10						
Box Material		Cold-rolled steel						
Operating Temperature		-25°C ~ +60°C						
Humidity		≤95%						
Connector		MC4 or PG						
Installation		Wall Mounting						
Altitude		2000m						
Dimension		510*650*180mm						
MCCB(M1)		or	MCCB(M3 DC1000V)		or	MCCB(M3 1500V)		
Rated Voltage Ue (V)	DC1000		Rated Voltage Ue (V)	DC1000		Rated Voltage Ue (V)	DC1500	
Ui (V)	DC1600		Ui (V)	DC1250		Ui (V)	DC1500	
Rated Current In(A)	160~250		Rated Current In(A)	63~320		Rated Current In(A)	63~800	
Icu (kA)	20		Icu (kA)	20		Uimp (kV)	20	
standard	IEC 60947-2		standard	IEC 60947-2		standard	IEC 60947-2	
SPD			Fuse	LQR3-32	or	LQR6-35	or	LQR8-50
Rated Voltage Ue (V)	DC1000/1500		Rated Voltage Ue (V)	DC1000		DC1500		DC1500
In (8/20)us (kA)	20		Rated Current In(A)	1~30		1~35		1~50
Imax (8/20)us (kA)	40		Fuse Size (mm)	10*38		10*65		10*85/14*85
Protection Level (kV)	3.6		Standard	IEC60269		IEC60269		IEC60269
standard	IEC 61643-31							

LQT12/1

CE


RoHS

IEC

IP65

PV Combiner Box 12in 1out

DC 1000V

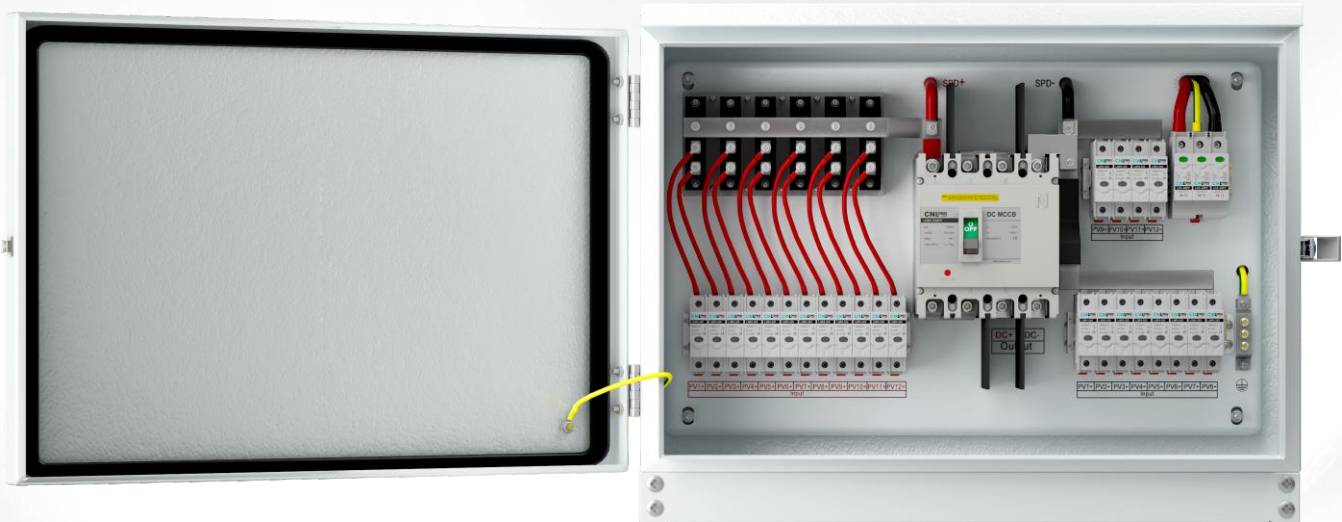

LQT12/1DC1000VM1-XF


- 

IP65 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

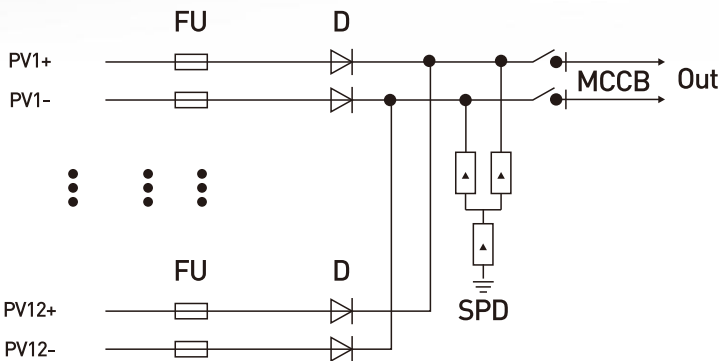

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

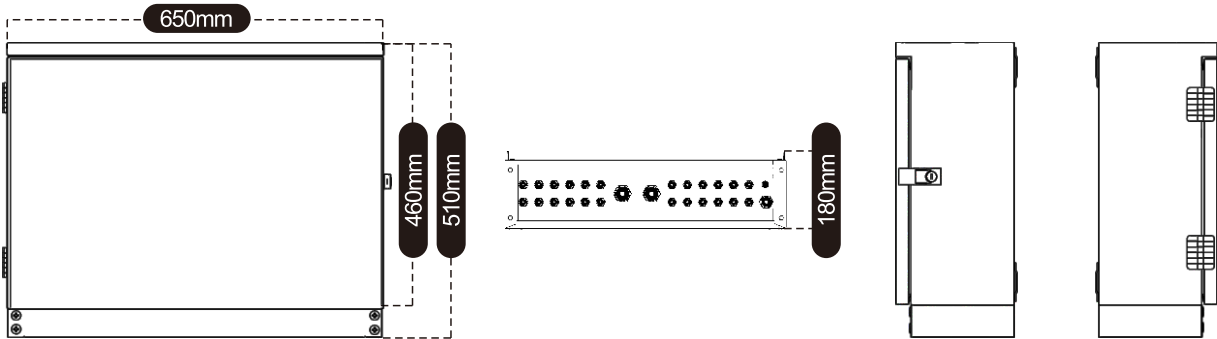

Technical data			
Model	LQT12/1DC1000VM1-XF DC1000VM3-XF DC1500VM3-XF		
String	12 in 1 out		
Rated Voltage Ue (V)	DC 1000	DC1000	DC1500
Maximum input current per string (A)	15/20/25/30	15/20/25/30	15~50
Maximum output current per string (A)	160/180/200/225/250	63~320	63~320
Quality Certificate	CE,ISO9001,RoHS,IP65		
Protection Level	IP65		
Impact Level	IK10		
Box Material	Cold-rolled steel		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Wall Mounting		
Altitude	2000m		
Dimension	510*650*180mm		

MCCB(M1)		or	MCCB(M3 DC1000V)		or	MCCB(M3 1500V)	
Rated Voltage Ue (V)	DC1000		Rated Voltage Ue (V)	DC1000		Rated Voltage Ue (V)	DC1500
Ui (V)	DC1600		Ui (V)	DC1250		Ui (V)	DC1500
Rated Current In(A)	160~250		Rated Current In(A)	63~320		Rated Current In(A)	63~800
Icu (kA)	20		Icu (kA)	20		Uimp (kV)	20
standard	IEC 60947-2		standard	IEC 60947-2		standard	IEC 60947-2
SPD			Fuse	LQR3-32 or LQR6-35 or LQR8-50			
Rated Voltage Ue (V)	DC1000/1500		Rated Voltage Ue (V)	DC1000		DC1500	DC1500
In (8/20)us (kA)	20		Rated Current In(A)	1~30		1~35	1~50
Imax (8/20)us (kA)	40		Fuse Size (mm)	10*38		10*65	10*85/14*85
Protection Level (kV)	3.6		Standard	IEC60269		IEC60269	IEC60269
standard	IEC 61643-31						


LQT14/1

CE ISO 9001 R&HS IEC IP65

CNLong.com


PV Combiner Box 14in 1out

DC 1000/1500V

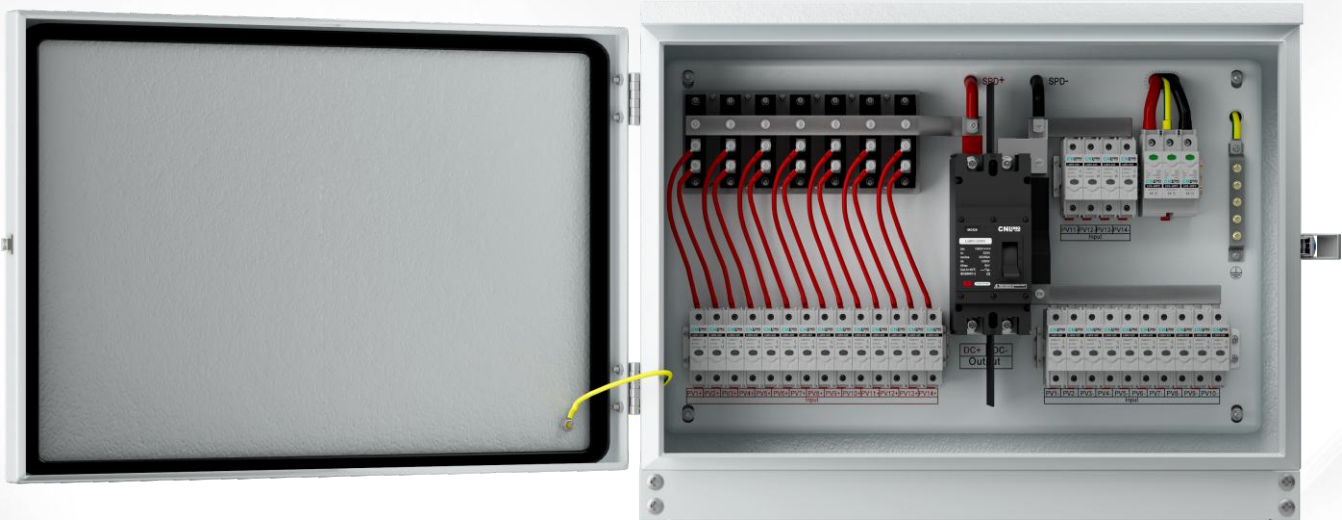


LQT14/1DC1000VM3-XF

- IP65 outdoor waterproof and sun resistant UV-resistant
- Short-circuit protection, overload protection, lightning protection, Isolation circuit
- Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- OEM/ODM Free Customization for PV Products

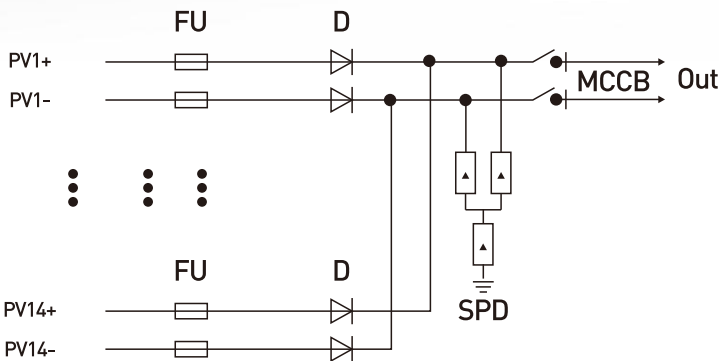

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

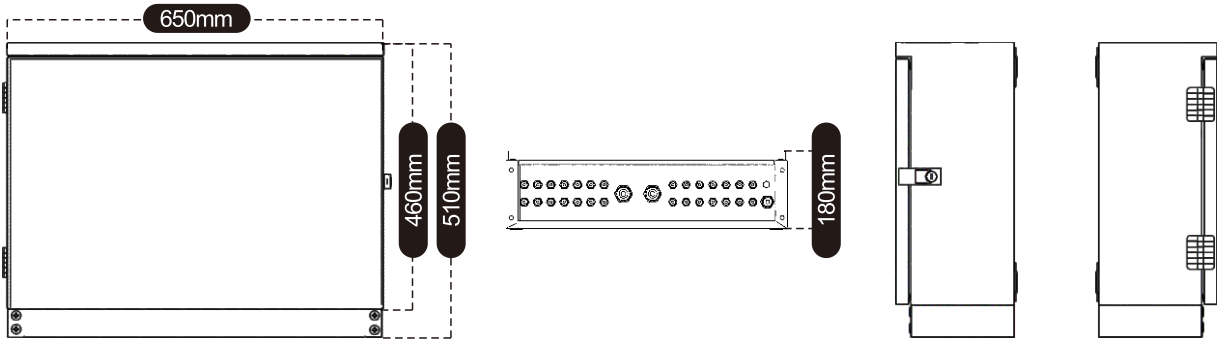

Technical data				
Model	LQT14/1DC1000VM3-XF		LQT14/1DC1500VM3-XF	
String	14 in 1 out			
Rated Voltage Ue (V)	DC 1000		DC1500	
Maximum input current per string (A)	15/20/25/30		15~50	
Maximum output current per string (A)	63~800		63~800	
Quality Certificate	CE,ISO9001,RoHS,IP65			
Protection Level	IP65			
Impact Level	IK10			
Box Material	Cold-rolled steel			
Operating Temperature	-25°C ~ +60°C			
Humidity	≤95%			
Connector	MC4 or PG			
Installation	Wall Mounting			
Altitude	2000m			
Dimension	510*650*180mm			
MCCB(M3 DC1000V) or MCCB(M3 DC1500V)				
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1500	
Ui (V)	DC1250	Ui (V)	DC1500	
Rated Current In(A)	63~800	Rated Current In(A)	63~800	
Icu (kA)	20	Uimp (kV)	20	
standard	IEC 60947-2	standard	IEC 60947-2	
SPD		Fuse	LQR3-32 or LQR6-35	or LQR8-50
Rated Voltage Ue (V)	DC1000/1500	Rated Voltage Ue (V)	DC1000	DC1500
In (8/20)us (kA)	20	Rated Current In(A)	1~30	1~35
Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38	10*65
Protection Level (kV)	3.6	Standard	IEC60269	IEC60269
standard	IEC 61643-31			


LQT16/1

CE ISO 9001 RoHS IEC IP65

CNLong.com


PV Combiner Box 16in 1out

DC 1000/1500V

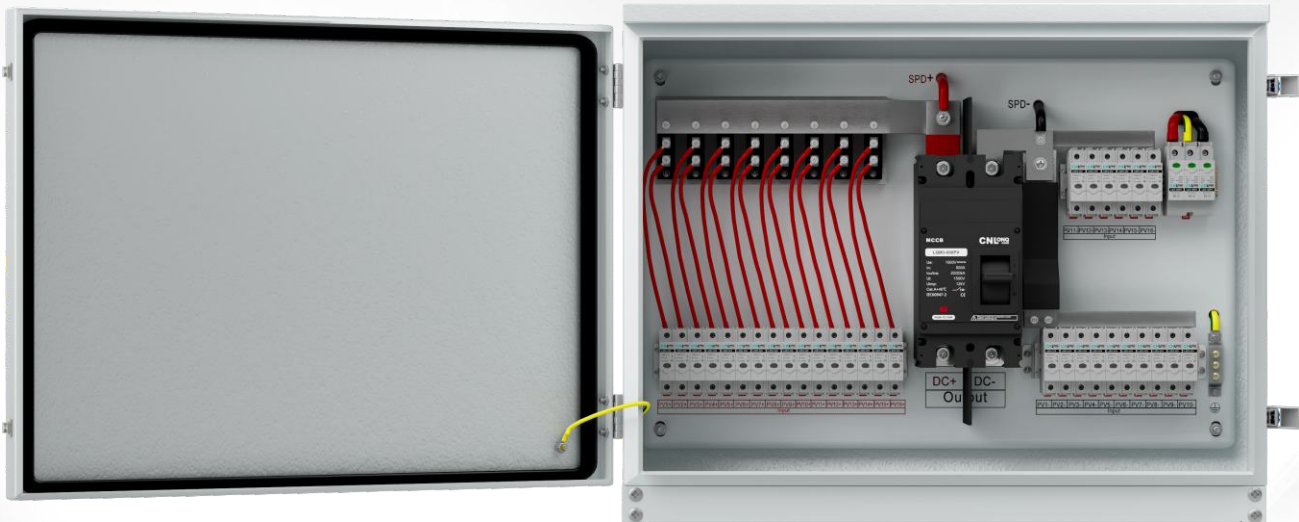


LQT16/1DC1000VM3-XF

- IP65 outdoor waterproof and sun resistant UV-resistant
- Short-circuit protection, overload protection, lightning protection, Isolation circuit
- Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- OEM/ODM Free Customization for PV Products

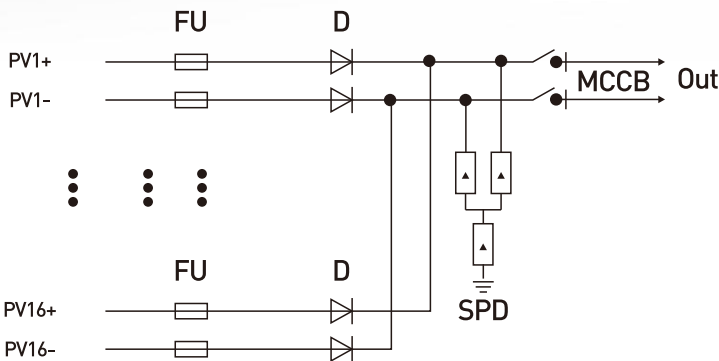

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

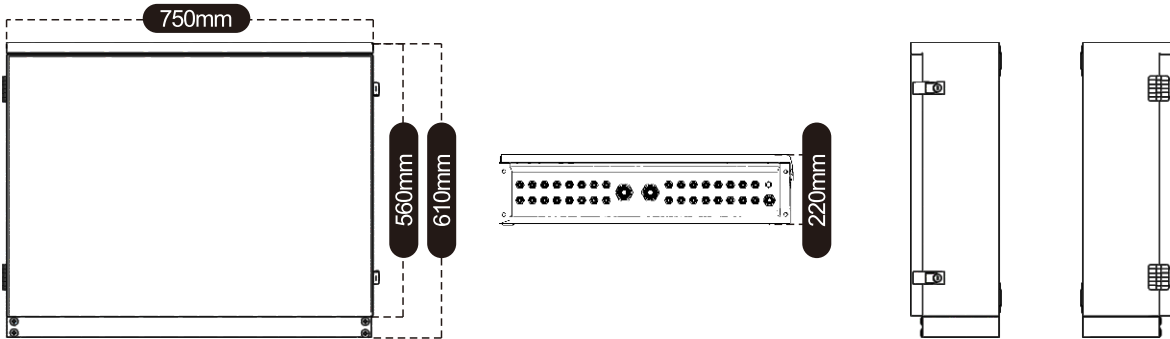


Technical data				
Model	LQT16/1DC1000VM3-XF		LQT16/1DC1500VM3-XF	
String	16 in 1 out			
Rated Voltage Ue (V)	DC 1000		DC1500	
Maximum input current per string (A)	15/20/25/30		15~50	
Maximum output current per string (A)	63~800		63~800	
Quality Certificate	CE,ISO9001,RoHS,IP65			
Protection Level	IP65			
Impact Level	IK10			
Box Material	Cold-rolled steel			
Operating Temperature	-25°C ~ +60°C			
Humidity	≤95%			
Connector	MC4 or PG			
Installation	Wall Mounting			
Altitude	2000m			
Dimension	610*750*220mm			
MCCB(M3 DC1000V) or MCCB(M3 DC1500V)				
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1500	
Ui (V)	DC1250	Ui (V)	DC1500	
Rated Current In(A)	63~800	Rated Current In(A)	63~800	
Icu (kA)	20	Uimp (kV)	20	
standard	IEC 60947-2	standard	IEC 60947-2	
SPD		Fuse	LQR3-32 or LQR6-35	or LQR8-50
Rated Voltage Ue (V)	DC1000/1500	Rated Voltage Ue (V)	DC1000	DC1500
In (8/20)us (kA)	20	Rated Current In(A)	1~30	1~35
Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38	10*65
Protection Level (kV)	3.6	Standard	IEC60269	IEC60269
standard	IEC 61643-31			

LQT18/1

CE ISO 9001 R&HS IEC IP65

PV Combiner Box 18in 1out

DC 1000/1500V

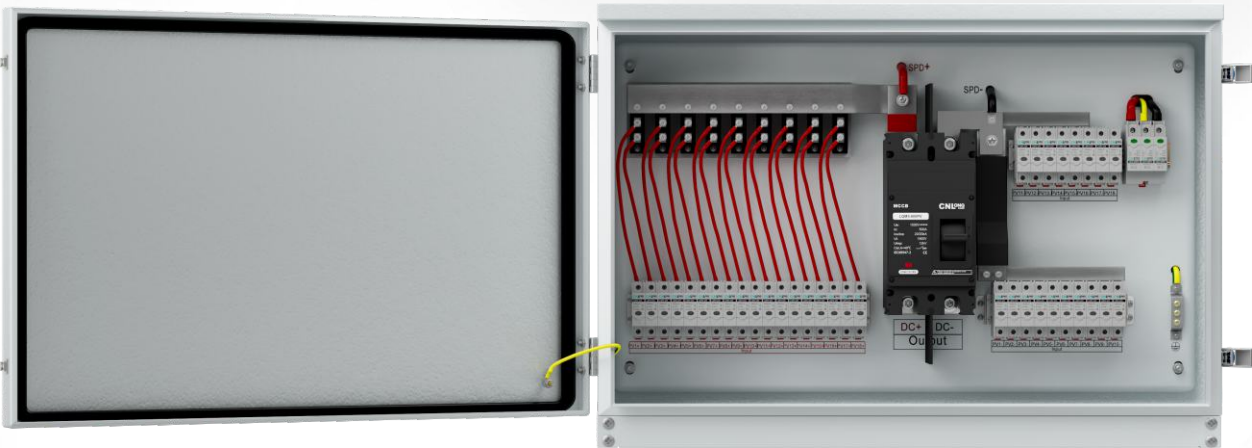

LQT18/1DC1000VM3-XF



IP65 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant




OEM/ODM Free Customization for PV Products

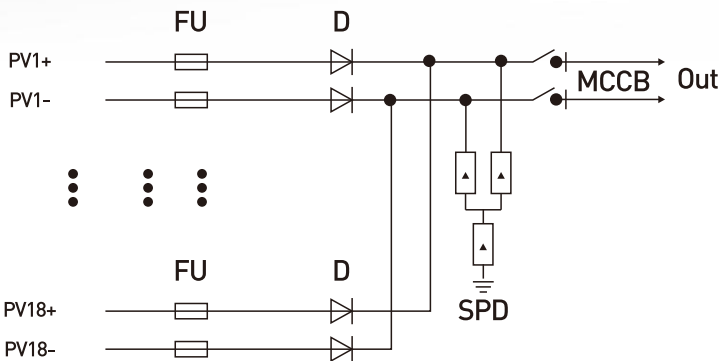

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

CN LONG.com

Product Dimension Drawing (mm)

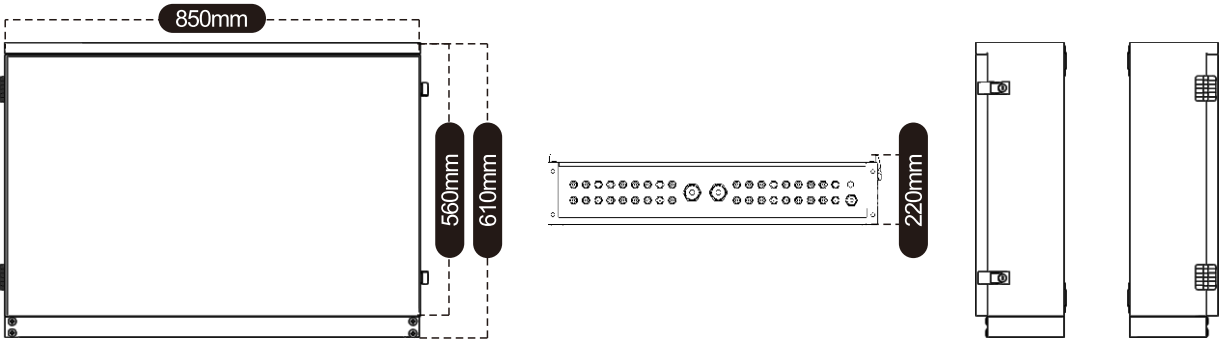

Technical data			
Model	LQT18/1DC1000VM3-XF		LQT18/1DC1500VM3-XF
String	18 in 1 out		
Rated Voltage Ue (V)	DC 1000		DC1500
Maximum input current per string (A)	15/20/25/30		15~50
Maximum output current per string (A)	63~800		63~800
Quality Certificate	CE,ISO9001,RoHS,IP65		
Protection Level	IP65		
Impact Level	IK10		
Box Material	Cold-rolled steel		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Wall Mounting		
Altitude	2000m		
Dimension	610*850*220mm		
MCCB(M3 DC1000V) or MCCB(M3 DC1500V)			
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1500
Ui (V)	DC1250	Ui (V)	DC1500
Rated Current In(A)	63~800	Rated Current In(A)	63~800
Icu (kA)	20	Uimp (kV)	20
standard	IEC 60947-2	standard	IEC 60947-2
SPD		Fuse	LQR3-32 or LQR6-35 or LQR8-50
Rated Voltage Ue (V)	DC1000/1500	Rated Voltage Ue (V)	DC1000 DC1500 DC1500
In (8/20)us (kA)	20	Rated Current In(A)	1~30 1~35 1~50
Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38 10*65 10*85/14*85
Protection Level (kV)	3.6	Standard	IEC60269 IEC60269 IEC60269
standard	IEC 61643-31		


LQT20/1

CE ISO 9001 RoHS IEC IP65

CNLong.com


PV Combiner Box 20in 1out

DC 1000/1500V

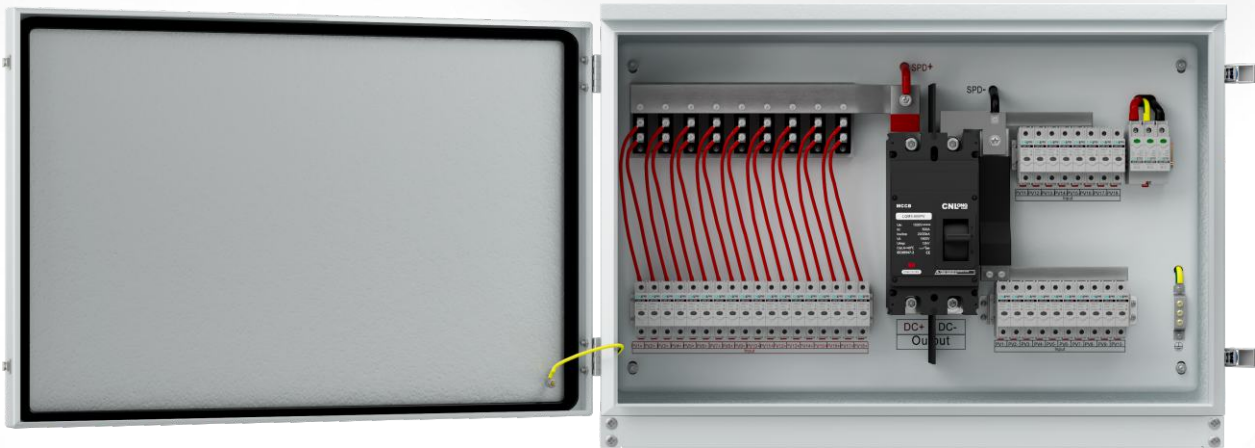


LQT20/1DC1000VM3-XF

- IP65 outdoor waterproof and sun resistant UV-resistant
- Short-circuit protection, overload protection, lightning protection, Isolation circuit
- Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- OEM/ODM Free Customization for PV Products

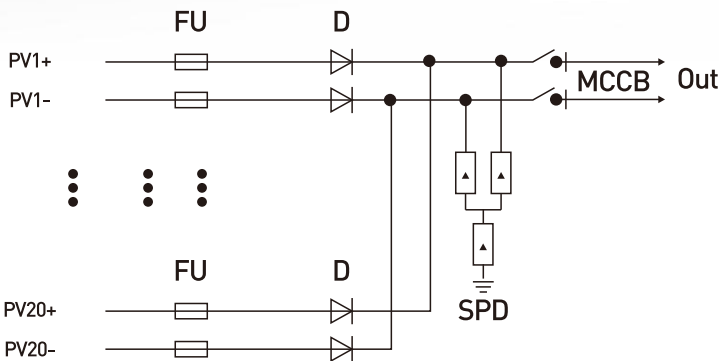

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

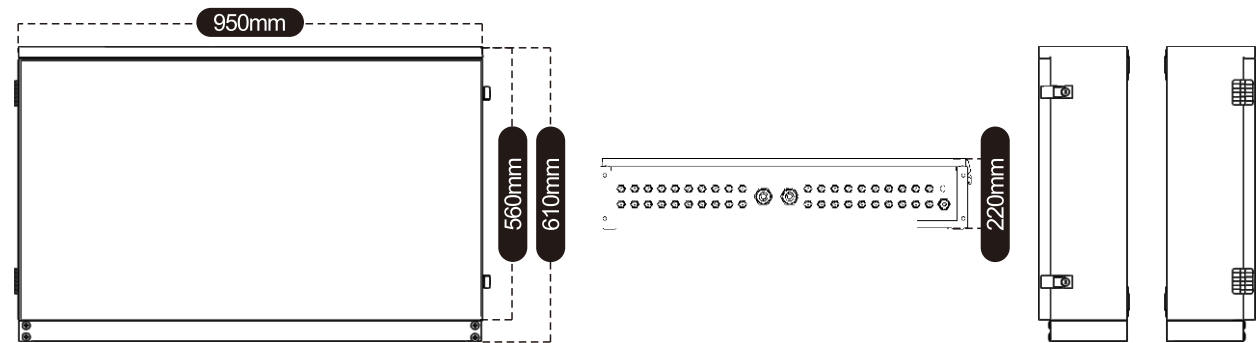

Technical data			
Model	LQT20/1DC1000VM3-XF		LQT20/1DC1500VM3-XF
String	20 in 1 out		
Rated Voltage Ue (V)	DC 1000		DC1500
Maximum input current per string (A)	15/20/25/30		15~50
Maximum output current per string (A)	63~800		63~800
Quality Certificate	CE,ISO9001,RoHS,IP65		
Protection Level	IP65		
Impact Level	IK10		
Box Material	Cold-rolled steel		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Wall Mounting		
Altitude	2000m		
Dimension	610*950*220mm		
MCCB(M3 DC1000V) or MCCB(M3 DC1500V)			
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1500
Ui (V)	DC1250	Ui (V)	DC1500
Rated Current In(A)	63~800	Rated Current In(A)	63~800
Icu (kA)	20	Uimp (kV)	20
standard	IEC 60947-2	standard	IEC 60947-2
SPD		Fuse	LQR3-32 or LQR6-35 or LQR8-50
Rated Voltage Ue (V)	DC1000/1500	Rated Voltage Ue (V)	DC1000 DC1500 DC1500
In (8/20)us (kA)	20	Rated Current In(A)	1~30 1~35 1~50
Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38 10*65 10*85/14*85
Protection Level (kV)	3.6	Standard	IEC60269 IEC60269 IEC60269
standard	IEC 61643-31		


LQT24/1

CE ISO 9001 RoHS IEC IP65

CNLong.com

PV Combiner Box 24in 1out

DC 1000/1500V

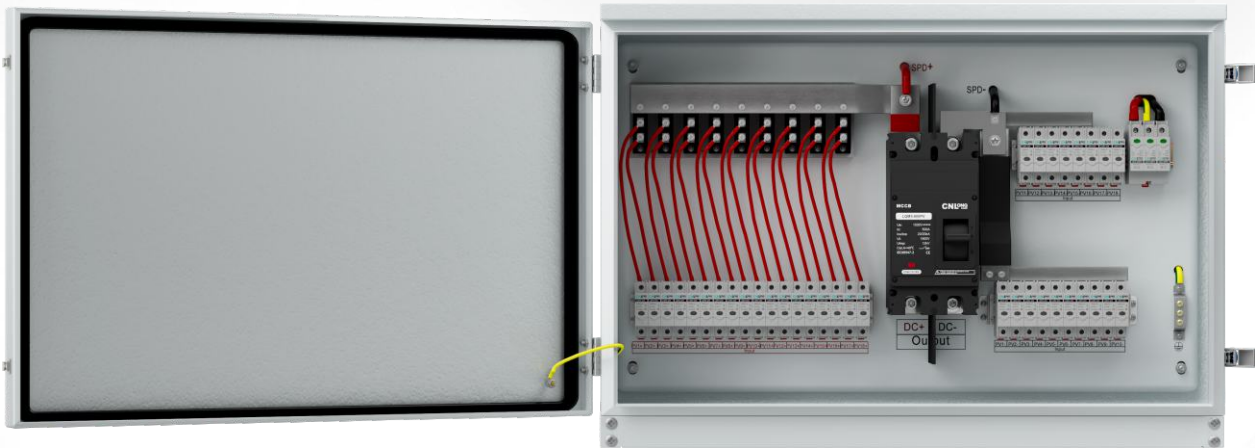

LQT24/1DC1000VM3-XF


- 

IP65 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

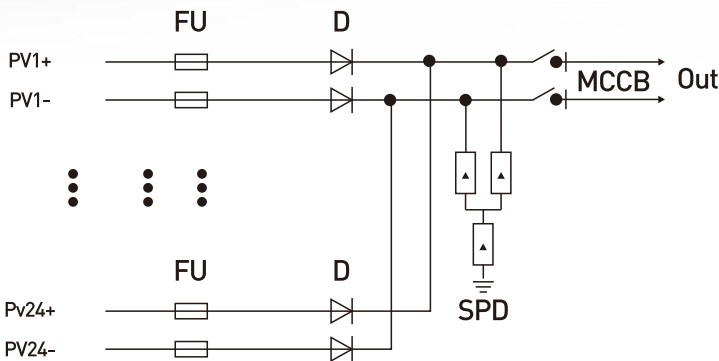

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

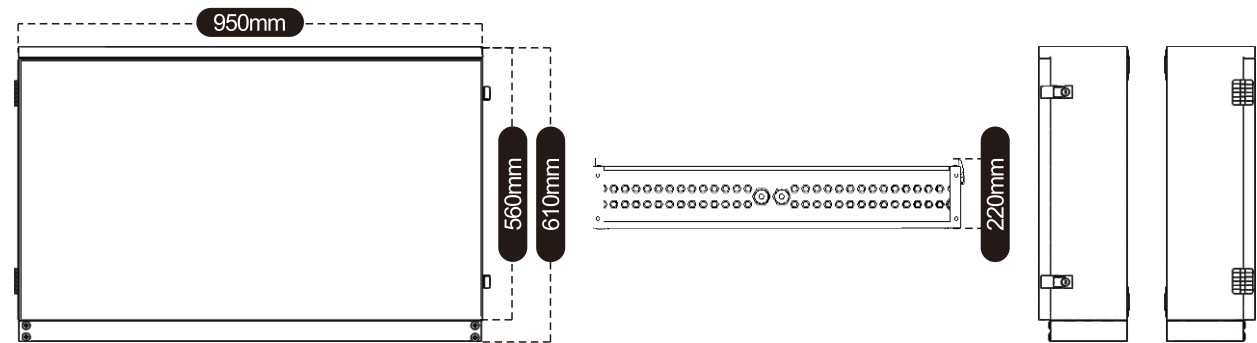

Technical data			
Model	LQT24/1DC1000VM3-XF		LQT24/1DC1500VM3-XF
String	24 in 1 out		
Rated Voltage Ue (V)	DC 1000		DC1500
Maximum input current per string (A)	15/20/25/30		15~50
Maximum output current per string (A)	63~800		63~800
Quality Certificate	CE,ISO9001,RoHS,IP65		
Protection Level	IP65		
Impact Level	IK10		
Box Material	Cold-rolled steel		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Wall Mounting		
Altitude	2000m		
Dimension	610*950*220mm		
MCCB(M3 DC1000V) or MCCB(M3 DC1500V)			
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1500
Ui (V)	DC1250	Ui (V)	DC1500
Rated Current In(A)	63~800	Rated Current In(A)	63~800
Icu (kA)	20	Uimp (kV)	20
standard	IEC 60947-2	standard	IEC 60947-2
SPD		Fuse	LQR3-32 or LQR6-35 or LQR6-50
Rated Voltage Ue (V)	DC1000/1500	Rated Voltage Ue (V)	DC1000 DC1500 DC1500
In (8/20)us (kA)	20	Rated Current In(A)	1~30 1~35 1~50
Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38 10*65 10*85/14*85
Protection Level (kV)	3.6	Standard	IEC60269 IEC60269 IEC60269
standard	IEC 61643-31		

LQT4/4

CE ISO 9001 R6HS IEC IP65

CN LONGQ.com

PV Combiner Box 4in 4out

DC 500/600V



LQT4/4DC500VB1-XF



IP65 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant




OEM/ODM Free Customization for PV Products

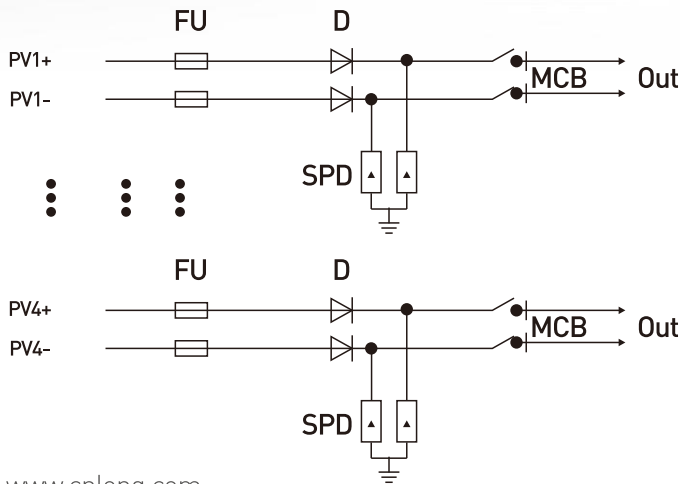

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

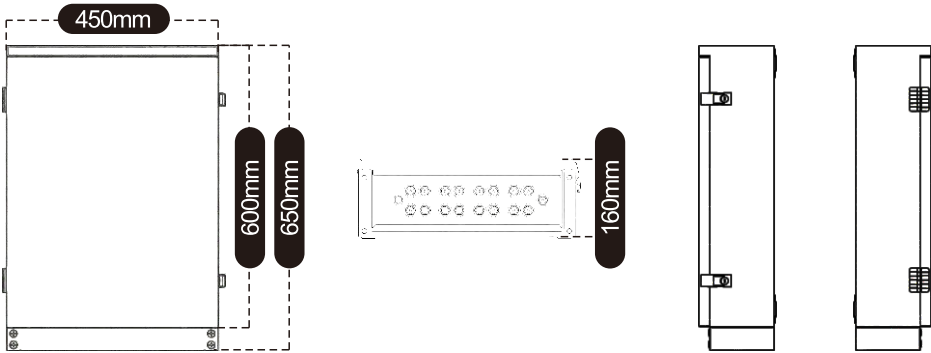

Technical data		
Model	LQT4/4DC500VB1-XF	LQT4/4DC600VL7-XF
String	4 in 4 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP65	
Protection Level	IP65	
Impact Level	IK10	
Box Material	Cold-rolled steel	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Wall Mounting	
Altitude	2000m	
Dimension	650*450*160mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32/40/50/63	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		

LQT4/4

CE ISO 9001:2015 ROHS IEC IP65

PV Combiner Box 4in 4out

DC 1000V



LQT4/4DC1000VB1-XF


- 

IP65 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

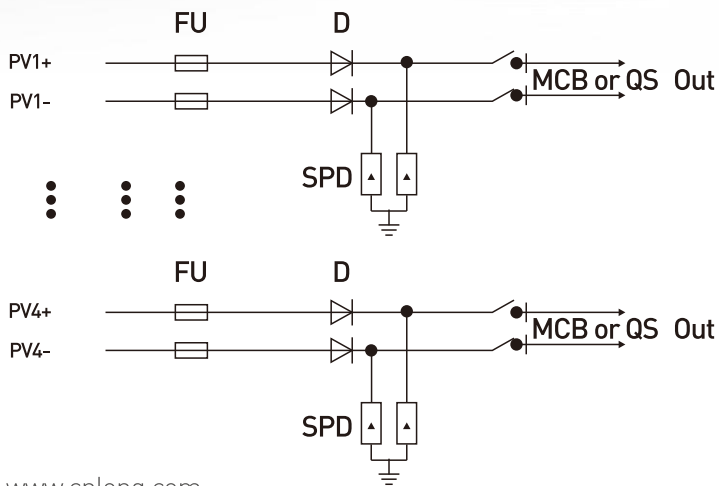

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

Product Dimension Drawing (mm)

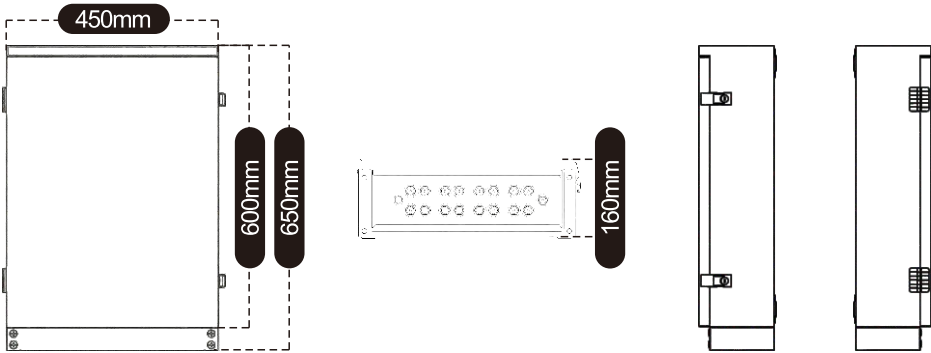

Technical data			
Model	LQT4/4DC1000VB1-XF	1000VL7-XF	1000VQ-XF
String	4 in 4 out		
Rated Voltage Ue (V)	DC 1000	DC 1000	DC 1000
Maximum input current per string (A)	15/20/25/30		
Maximum output current per string (A)	32/40/50/63	32/40/50/63	32
Quality Certificate	CE,ISO9001,RoHS,IP65		
Protection Level	IP65		
Impact Level	IK10		
Box Material	Cold-rolled steel		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Wall Mounting		
Altitude	2000m		
Dimension	650*450*160mm		

	QS Q	MCB B1/L7	SPD	FUSE
Ue (V)	DC1200	DC1000/1200	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1500	DC1000/1200	In (8/20)us (kA)	20
In (A)	32	32/40/50/63	Imax (8/20)us (kA)	40
Icu (kA)	/	6	Protection Level (kV)	3.6
standard	IEC 60947-3	IEC 60947-2	standard	IEC 61643-31

LQT5/5
















IP65

PV Combiner Box 5in 5out

DC 1000V

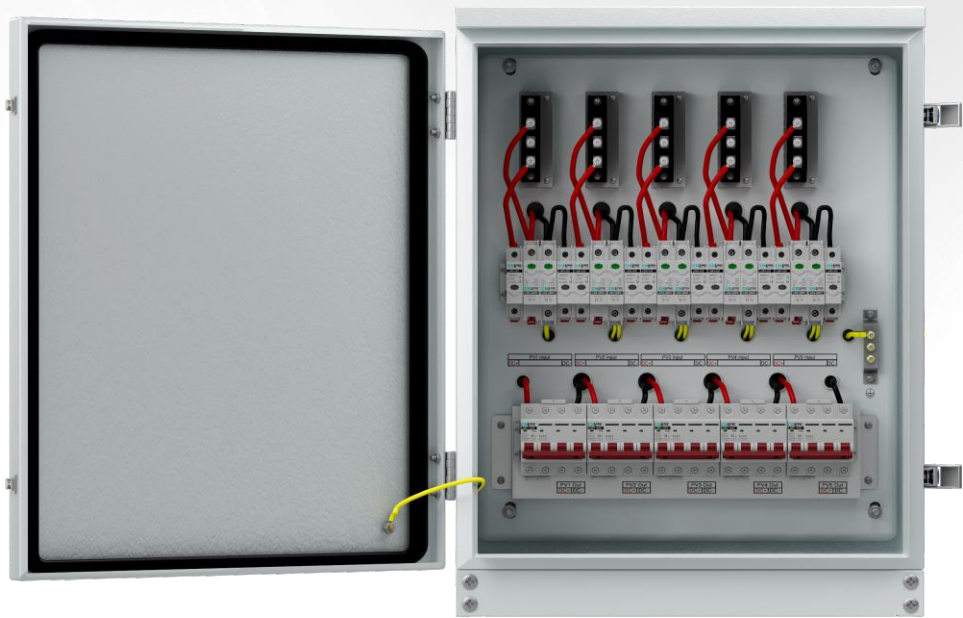

LQT5/5DC1000VB1-XF


- 

IP65 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 

Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- 


OEM/ODM Free Customization for PV Products

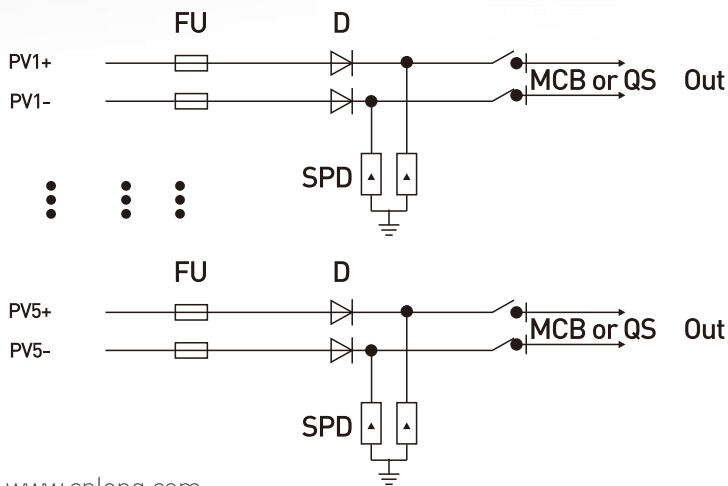

MCB: Miniature Circuit Breaker
QS: Solar Disconnect Switch(Isolator)
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

CN**LONG**Q.com

Product Dimension Drawing (mm)

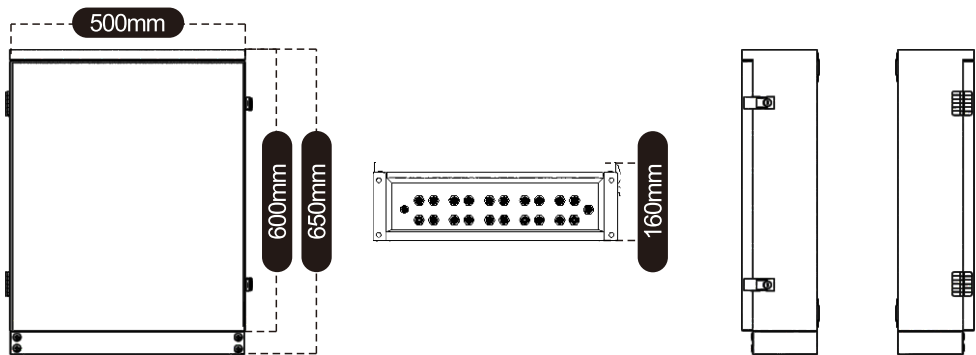

Technical data							
Model	LQT5/5DC1000VB1-XF		LQT5/5DC1000VL7-XF	LQT5/5DC1000VQ-XF			
String	5 in 5 out						
Rated Voltage Ue (V)	DC 1000		DC 1000	DC 1000			
Maximum input current per string (A)	15/20/25/30						
Maximum output current per string (A)	32/40/50/63		32/40/50/63	32			
Quality Certificate	CE,TUV, UKCA, CB, ISO9001,RoHS,IP65						
Protection Level	IP65						
Impact Level	IK10						
Box Material	Cold-rolled steel						
Operating Temperature	-25°C ~ +60°C						
Humidity	≤95%						
Connector	MC4 or PG						
Installation	Wall Mounting						
Altitude	2000m						
Dimension	650*500*160mm						
MCB(B1)		or	MCB(L7)		or	Isolator(QS)	
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1200	Rated Voltage Ue (V)	DC1200		
Ui (V)	DC1000	Ui (V)	DC1200	Ui (V)	DC1500		
Rated Current In(A)	32/40/50/63	Rated Current In(A)	32/40/50/63	Rated Current In(A)	32		
Icu (kA)	6	Icu (kA)	6	Uimp (kV)	8		
standard	IEC 60947-2	standard	IEC 60947-2	standard	IEC 60947-3		
SPD			Fuse				
Rated Voltage Ue (V)		DC1000	Rated Voltage Ue (V)	DC1000			
In (8/20)us (kA)		20	Rated Current In(A)	15/20/25/30			
Imax (8/20)us (kA)		40	Fuse Size (mm)	10*38			
Protection Level (kV)		3.6	Standard	IEC60269			
standard		IEC 61643-31					

LQT6/6
















IP65

PV Combiner Box 6in 6out

DC 1000V

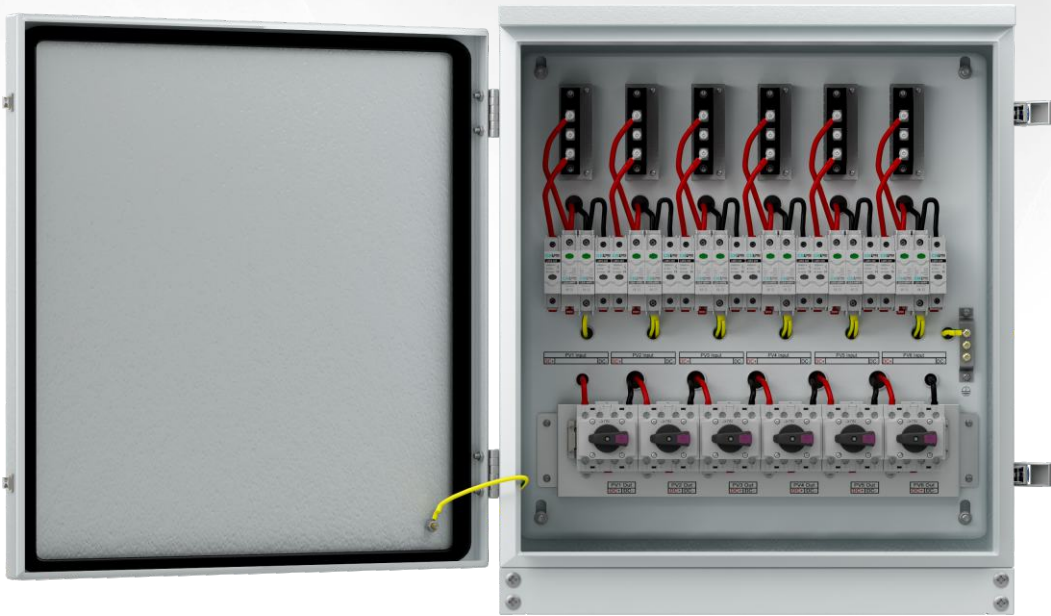

LQT6/6DC1000VQ-XF


- 

IP65 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 

Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- 


OEM/ODM Free Customization for PV Products

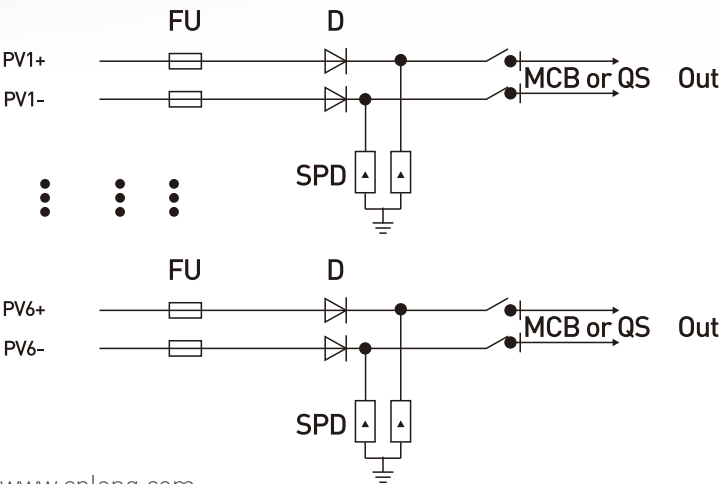

MCB: Miniature Circuit Breaker
QS: Solar Disconnect Switch(Isolator)
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

CN**LONG**Q.com

Product Dimension Drawing (mm)

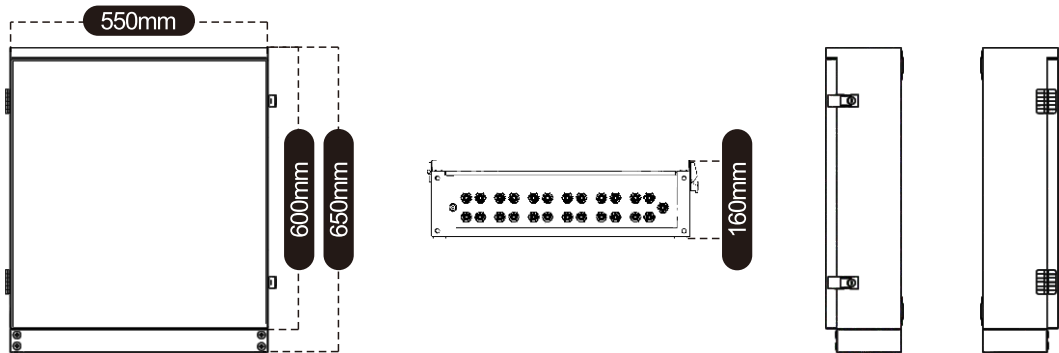

Technical data					
Model	LQT6/6DC1000VB1-XF		LQT6/6DC1000VL7-XF	LQT6/6DC1000VQ-XF	
String	6 in 6 out				
Rated Voltage Ue (V)	DC 1000		DC 1000	DC 1000	
Maximum input current per string (A)	15/20/25/30				
Maximum output current per string (A)	32/40/50/63		32/40/50/63	32	
Quality Certificate	CE,TUV, UKCA, CB, ISO9001,RoHS,IP65				
Protection Level	IP65				
Impact Level	IK10				
Box Material	Cold-rolled steel				
Operating Temperature	-25°C ~ +60°C				
Humidity	≤95%				
Connector	MC4 or PG				
Installation	Wall Mounting				
Altitude	2000m				
Dimension	650*550*160mm				
MCB(B1)		or	MCB(L7)		or Isolator(QS)
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1200	Rated Voltage Ue (V)	DC1200
Ui (V)	DC1000	Ui (V)	DC1200	Ui (V)	DC1500
Rated Current In(A)	32/40/50/63	Rated Current In(A)	32/40/50/63	Rated Current In(A)	32
Icu (kA)	6	Icu (kA)	6	Uimp (kV)	8
standard	IEC 60947-2	standard	IEC 60947-2	standard	IEC 60947-3
SPD			Fuse		
Rated Voltage Ue (V)		DC1000	Rated Voltage Ue (V)	DC1000	
In (8/20)us (kA)		20	Rated Current In(A)	15/20/25/30	
Imax (8/20)us (kA)		40	Fuse Size (mm)	10*38	
Protection Level (kV)		3.6	Standard	IEC60269	
standard		IEC 61643-31			

LQT8/8















IP65

PV Combiner Box 8in 8out

DC 1000V



LQT8/8DC1000VQ-XF


- 

IP65 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 

Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant
- 


OEM/ODM Free Customization for PV Products

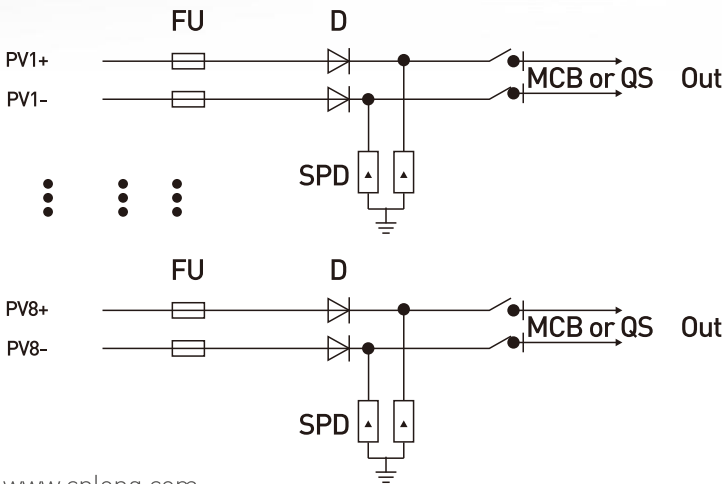

MCB: Miniature Circuit Breaker
QS: Solar Disconnect Switch(Isolator)
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

CNLong.com

Product Dimension Drawing (mm)

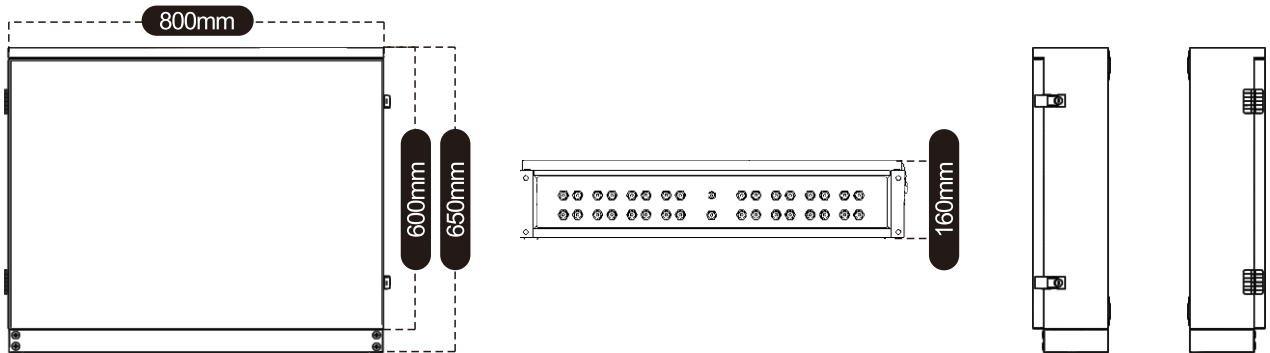

Technical data					
Model	LQT8/8DC1000VB1-XF		LQT8/8DC1000VL7-XF	LQT8/8DC1000VQ-XF	
String	8 in 8 out				
Rated Voltage Ue (V)	DC 1000		DC 1000	DC 1000	
Maximum input current per string (A)	15/20/25/30				
Maximum output current per string (A)	32/40/50/63		32/40/50/63	32	
Quality Certificate	CE,TUV, UKCA, CB, ISO9001,RoHS,IP65				
Protection Level	IP65				
Impact Level	IK10				
Box Material	Cold-rolled steel				
Operating Temperature	-25°C ~ +60°C				
Humidity	≤95%				
Connector	MC4 or PG				
Installation	Wall Mounting				
Altitude	2000m				
Dimension	650*800*160mm				
MCB(B1)		or	MCB(L7)	or	Isolator(QS)
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1200	Rated Voltage Ue (V)	DC1200
Ui (V)	DC1000	Ui (V)	DC1200	Ui (V)	DC1500
Rated Current In(A)	32/40/50/63	Rated Current In(A)	32/40/50/63	Rated Current In(A)	32
Icu (kA)	6	Icu (kA)	6	Uimp (kV)	8
standard	IEC 60947-2	standard	IEC 60947-2	standard	IEC 60947-3
SPD			Fuse		
Rated Voltage Ue (V)		DC1000	Rated Voltage Ue (V)	DC1000	
In (8/20)us (kA)		20	Rated Current In(A)	15/20/25/30	
Imax (8/20)us (kA)		40	Fuse Size (mm)	10*38	
Protection Level (kV)		3.6	Standard	IEC60269	
standard		IEC 61643-31			

LQT10/10

CE

ISO

9001

RoHS

IEC

UK

CA

CB

IP65

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

7


LQT6/2

CE ISO 9001 RoHS IEC IP65

CNLong.com

PV Combiner Box 6in 2out

DC 1000V

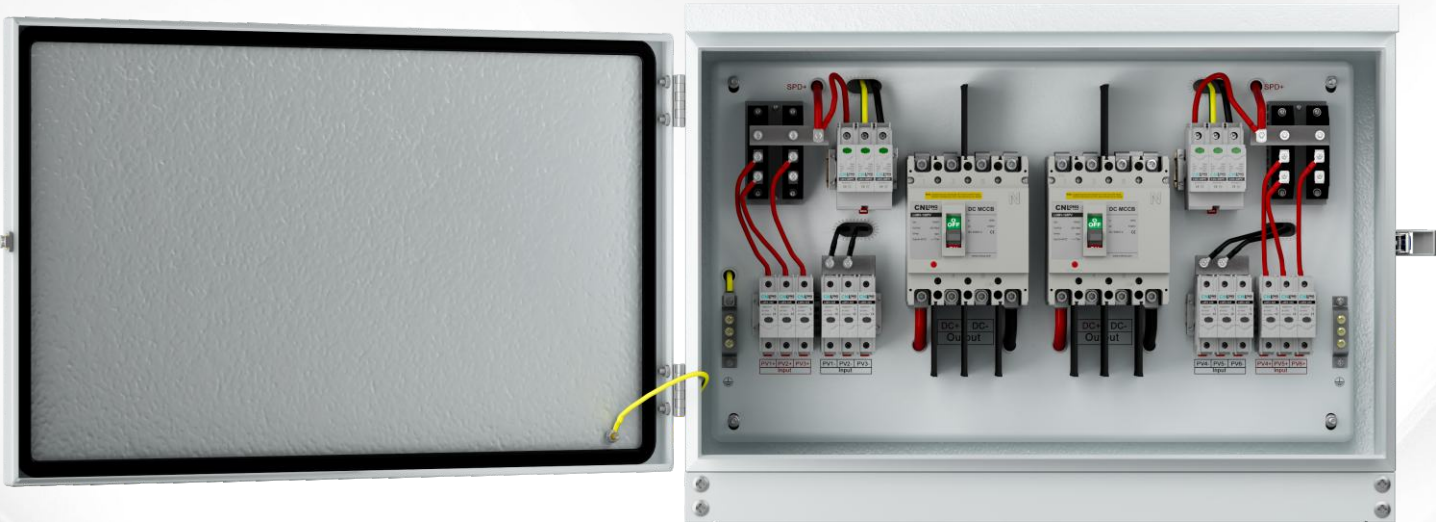

LQT6/2DC1000VM1-XF



IP65 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



Cold-rolled steel housing, IK10 impact resistance, Acid and alkali resistant, corrosion resistant




OEM/ODM Free Customization for PV Products

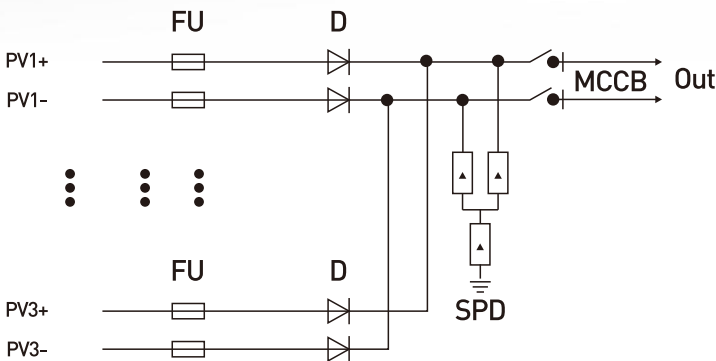

MCCB: Molded Case Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device
D: Anti-reflection diode (optional)

*Includes 2 Lines Of This Type

Product Dimension Drawing (mm)

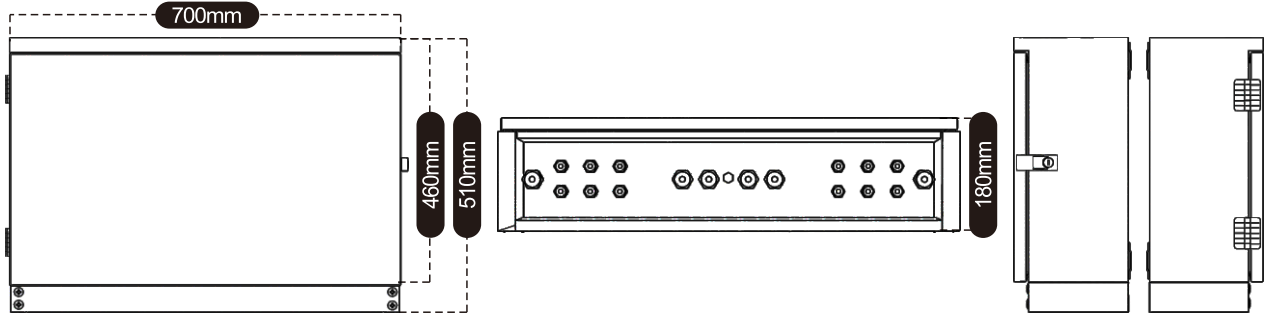

Technical data		
Model	LQT6/2DC1000VM1-XF	LQT6/2DC1000VM3-XF
String	6 in 2 out	
Rated Voltage Ue (V)	DC 1000	
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	63/80/100/125	63~320
Quality Certificate	CE,ISO9001,RoHS,IP65	
Protection Level	IP65	
Impact Level	IK10	
Box Material	Cold-rolled steel	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Wall Mounting	
Altitude	2000m	
Dimension	510*700*180mm	

MCCB(M1)		or	MCCB(M3 DC1000V)		or	MCCB(M3 1500V)	
Rated Voltage Ue (V)	DC1000		Rated Voltage Ue (V)	DC1000		Rated Voltage Ue (V)	DC1500
Ui (V)	DC1600		Ui (V)	DC1250		Ui (V)	DC1500
Rated Current In(A)	160~250		Rated Current In(A)	63~320		Rated Current In(A)	63~800
Icu (kA)	20		Icu (kA)	20		Uimp (kV)	20
standard	IEC 60947-2		standard	IEC 60947-2		standard	IEC 60947-2
SPD			Fuse			LQR3-32 or LQR6-35 or LQR6-50	
Rated Voltage Ue (V)	DC1000/1500		Rated Voltage Ue (V)	DC1000		DC1500	DC1500
In (8/20)us (kA)	20		Rated Current In(A)	1~30		1~35	1~50
Imax (8/20)us (kA)	40		Fuse Size (mm)	10*38		10*65	10*85/14*85
Protection Level (kV)	3.6		Standard	IEC60269		IEC60269	IEC60269
standard	IEC 61643-31						