


PV Combiner Box LQX-N Series

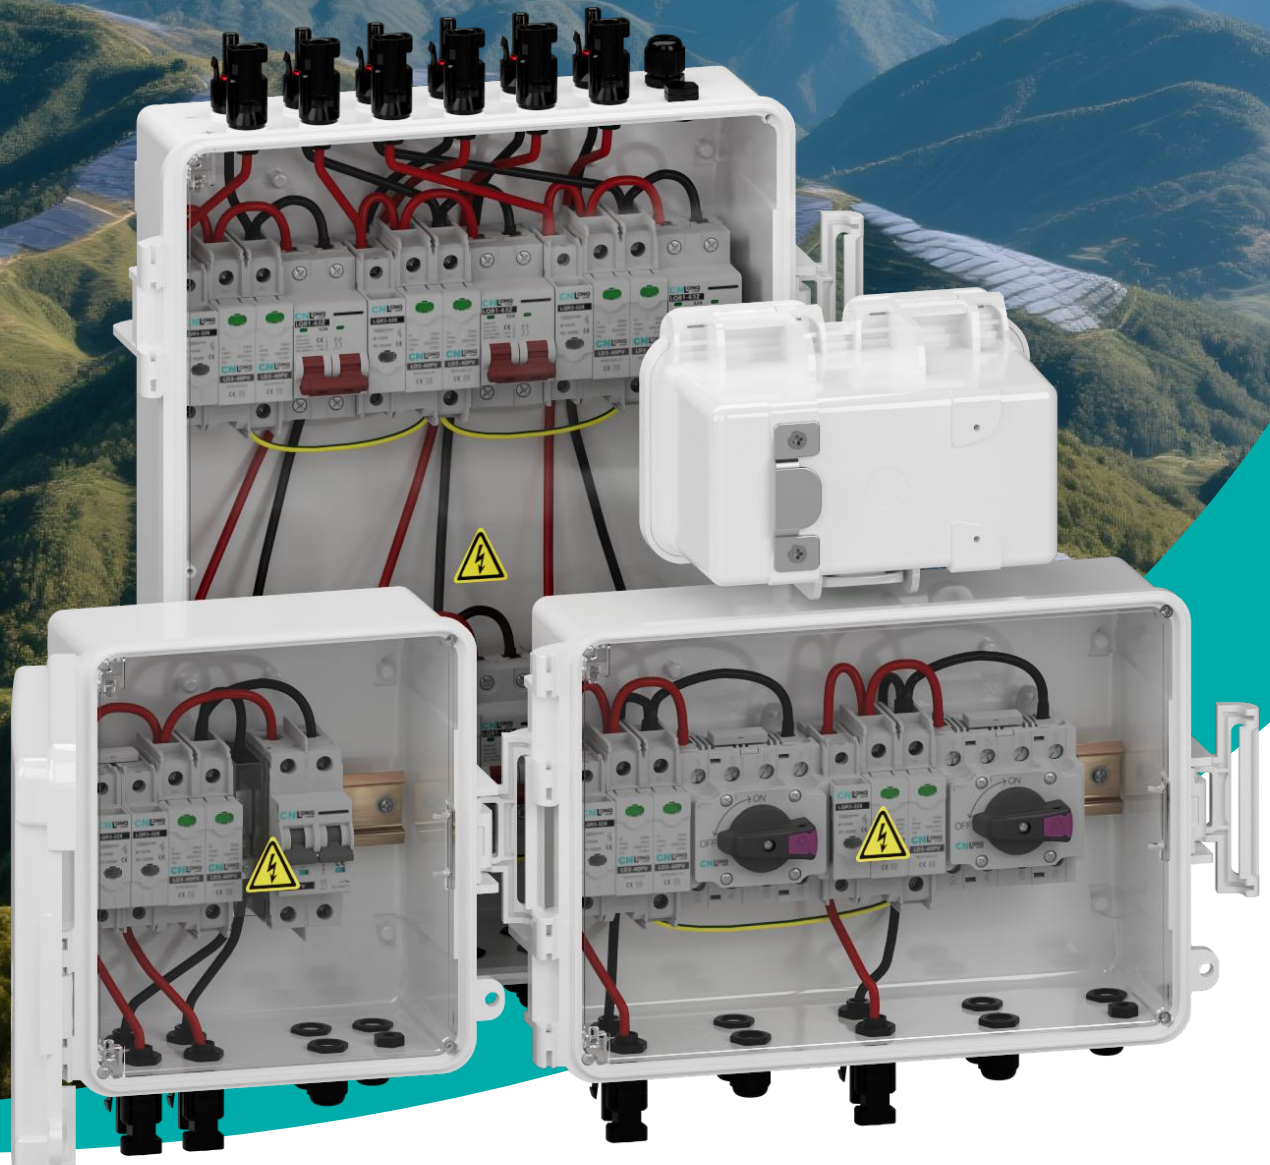

DC500V~1200V 6~125A input1~6 output1~6

CNLONGQ Photovoltaic combiner boxes are reliable components for solar power plants and rooftop systems. They feature DC overcurrent protection, surge suppression, and fuse short-circuit protection. Ip68 protection rating. Photovoltaic combiner boxes serve as the critical hub for connecting multiple solar panels in series to the inverter. They consolidate DC power while providing essential protection and monitoring to maximize system safety, efficiency, and return on investment.

- 

IP68 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 

PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- 


OEM/ODM Free Customization for PV Products

Company Profile

Wenzhou Longqi New Energy Co., Ltd. (Brand: **CNLONGQ**)

Founded In 2010 And Headquartered In Yueqing, Wenzhou—China’S Electrical Capital—Wenzhou Longqi New Energy Co., Ltd. Is A Leading Innovator In Photovoltaic System Components And Electrical Protection Equipment. We Specialize In Designing, Manufacturing, And Globally Distributing High-Performance Products Essential For Efficient, Safe Solar Power Generation Systems.

The Company’S Main Factory Covers **10,000m²** With An Additional **2,500m²** Of Warehouse Space. We Support Oem/Odm And Custom Junction Box Solutions, Holding Over **100 Project Certifications And Patents With A Team Of More Than 50 Technical Personnel**. Driven By Innovation And Stringent Quality Control, We Welcome Your Partnership In Building A Cleaner Energy Future Together.

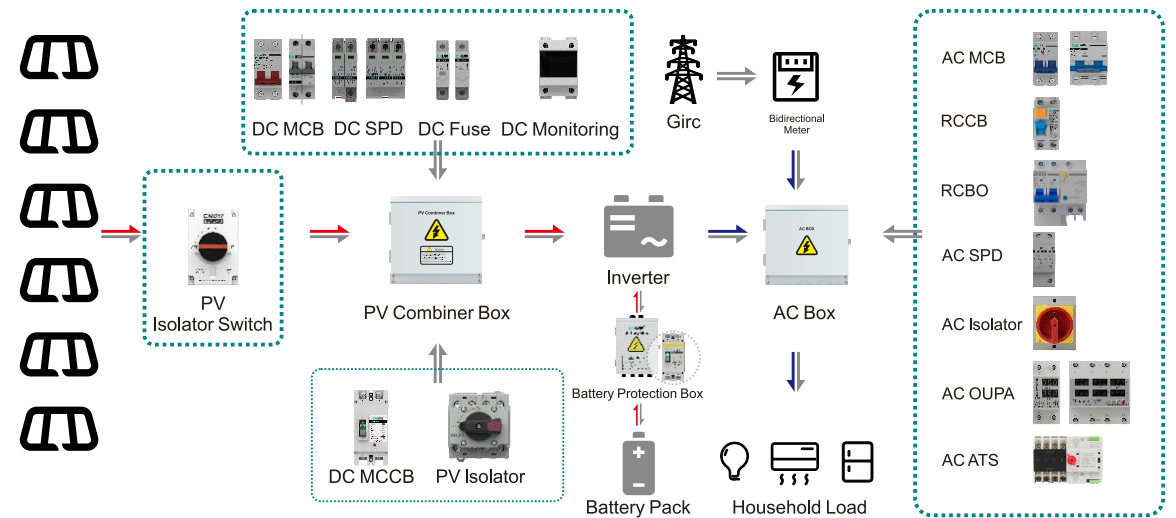

Contents

LQX-N1/1DC500VB1 600VL7	1	LQX1-N/1DC1000VQ 1000VB1/1000VL7	27
LQX-N2/1DC500VB1 600VL7	3	LQX-N2/1DC1000VQ 1000VB1/1000VL7	29
LQX-N2/2DC500VB1 600VL7	5	LQX-N2/2DC1000VQ 1000VB1/1000VL7	31
LQX-N3/1DC500VB1 600VL7	7	LQX-N3/1DC1000VB1 1000VL7	33
LQX-N3/3DC500VB1 600VL7	9	LQX-N3/3DC1000VQ 1000VL7	35
LQX-N4/1DC500VB1 600VL7	11	LQX-N4/1DC1000VB1 1000VL7	37
LQX-N4/2DC500VB1 600VL7	13	LQX-N4/2DC1000VQ 1000VB1/1000VL7	39
LQX-N4/4DC500VB1 600VL7	15	LQX-N4/4DC1000VQ 1000VB1/1000VL7	41
LQX-N5/1DC500VB1	17	LQX-N5/1DC1000VB1	43
LQX-N6/1DC500VB1	19	LQX-N6/1DC1000VB1	45
LQX-N6/2DC500VB1 600VL7	21	LQX-N6/2DC1000VB1 1000VL7	47
LQX-N6/3DC500VB1 600VL7	23		
LQX-N6/6DC500VB1 600VL7	25		

LQX-N1/1

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 1in 1out

DC 500/600V



LQX-N1/1DC500VB1

LQX-N1/1DC600VL7



IP68 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

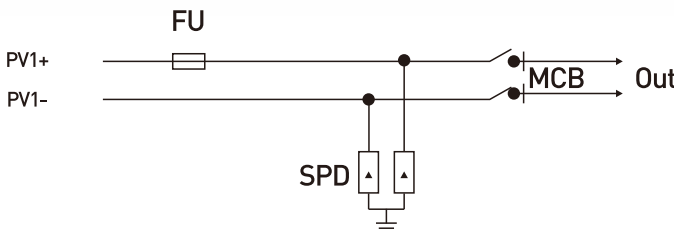

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

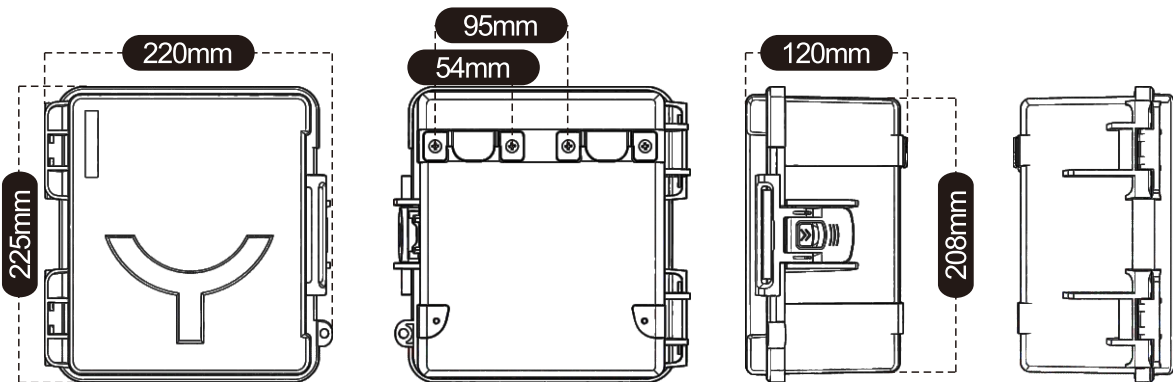

Technical data		
Model	LQX-N1/1DC500VB1	LQX-N1/1DC600VL7
String	1 in 1 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	225*220*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32/40/50/63	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		

LQX-N2/1

CE ISO 9001 RoHS IEC IP68

CN LONGQ.com

PV Combiner Box 2in 1out

DC 500/600V



LQX-N2/1DC500VB1

LQX-N2/1DC600VL7



IP68 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

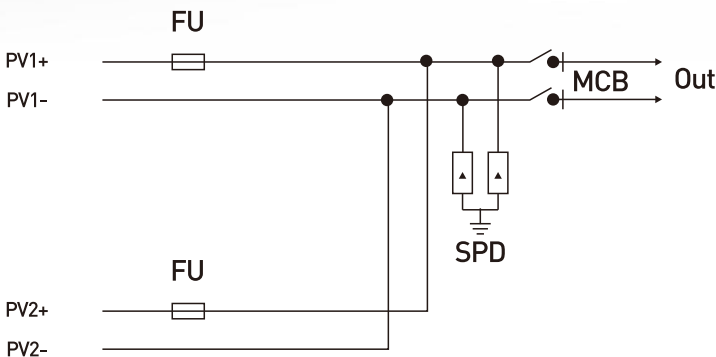

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

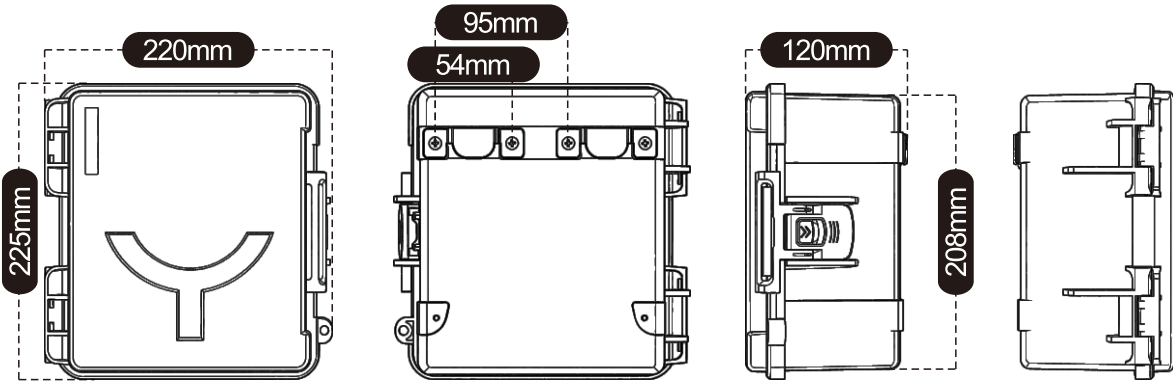

Technical data		
Model	LQX-N2/1DC500VB1	LQX-N2/1DC600VL7
String	2 in 1 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	225*220*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32/40/50/63	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		

LQX-N2/2

CE ISO 9001 RoHS IEC IP68

CN LONGQ.com

PV Combiner Box 2in 2out

DC 500/600V



LQX-N2/2DC500VB1

LQX-N2/2DC600VL7



IP68 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

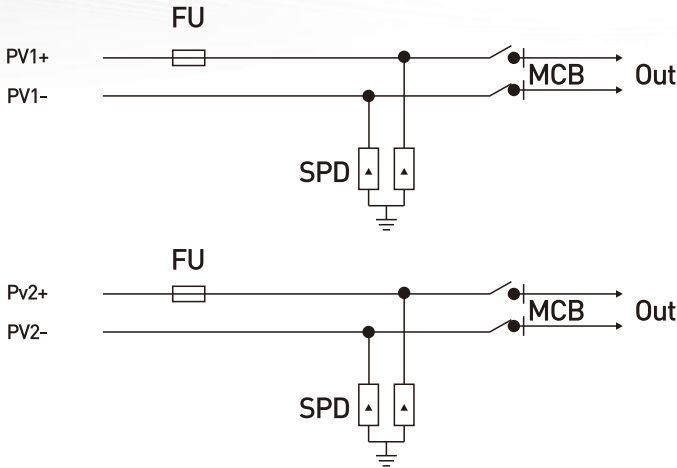

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

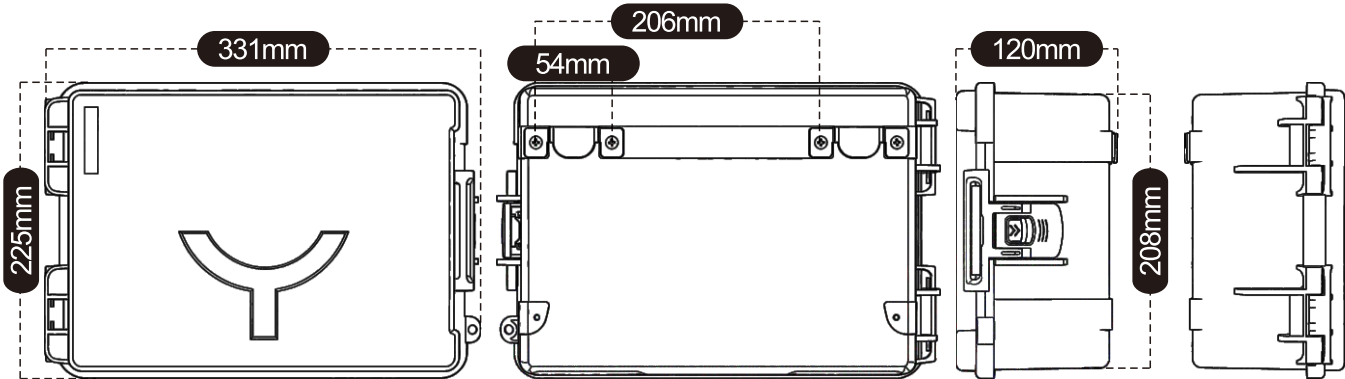

Technical data		
Model	LQX-N2/2DC500VB1	LQX-N2/2DC600VL7
String	2 in 2 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	225*331*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32/40/50/63	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		


LQX-N3/1

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 3in 1out

DC 500/600V

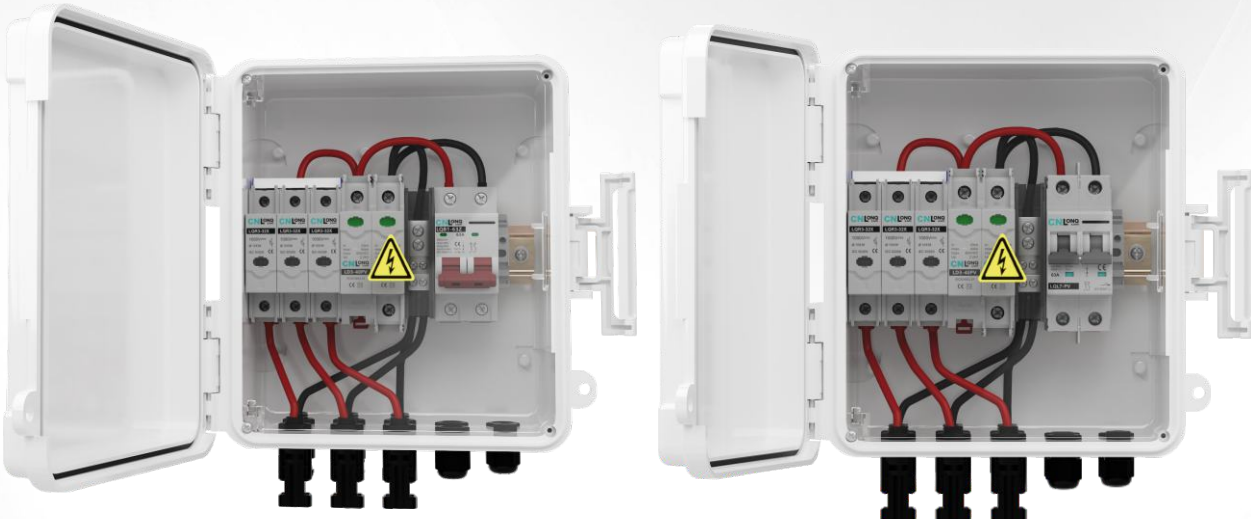

LQX-N3/1DC500VB1

LQX-N3/1DC600VL7



IP68 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

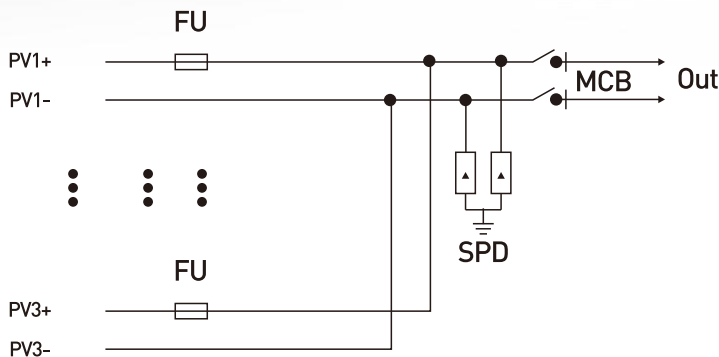

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

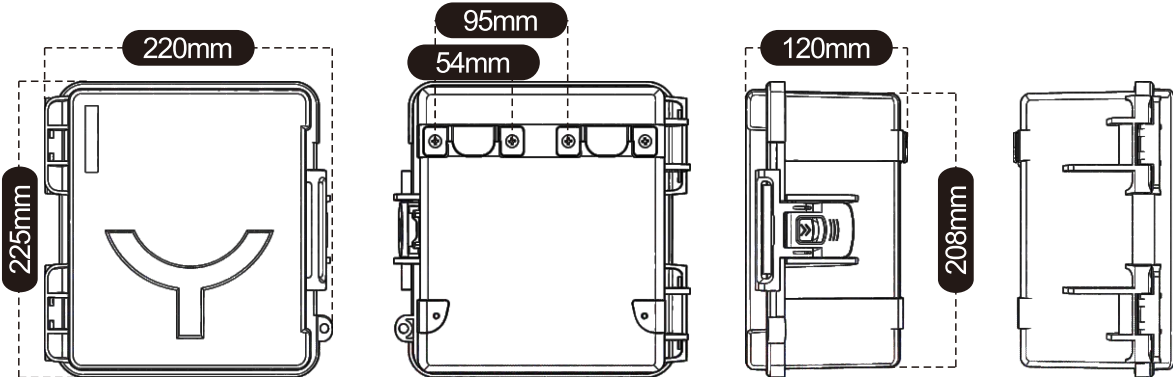

Technical data		
Model	LQX-N3/1DC500VB1	LQX-N3/1DC600VL7
String	3 in 1 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63/80/100/125	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	225*220*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32~125	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		

LQX-N3/3

CE ISO 9001 RoHS IEC IP68

CN LONGQ.com

PV Combiner Box 3in 3out


DC 500/600V



LQX-N3/3DC500VB1


LQX-N3/3DC600VL7

- IP68 outdoor waterproof and sun resistant UV-resistant
- Short-circuit protection, overload protection, lightning protection, Isolation circuit
- PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- OEM/ODM Free Customization for PV Products

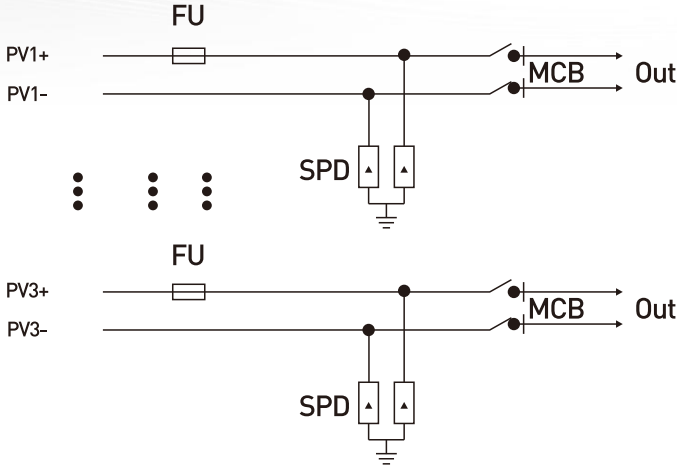

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

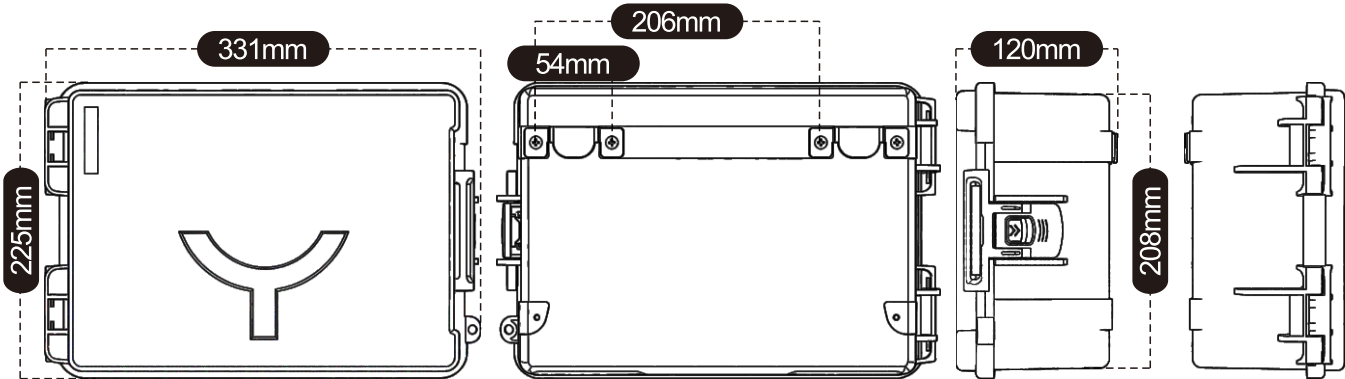

Technical data		
Model	LQX-N3/3DC500VB1	LQX-N3/3DC600VL7
String	3 in 3 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	225*331*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32/40/50/63	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		


LQX-N4/1

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 4in 1out

DC 500/600V

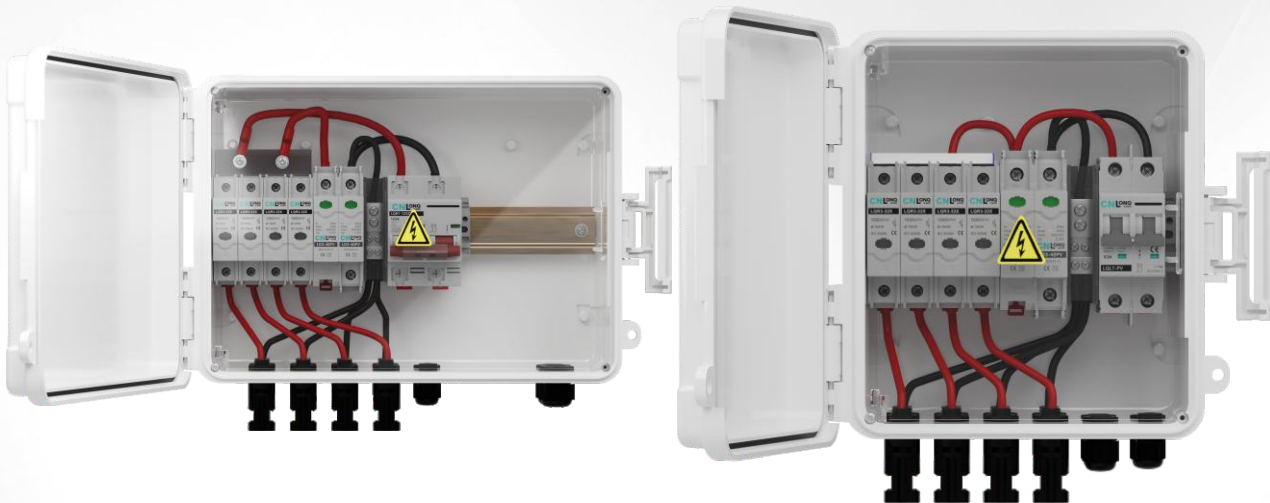

LQX-N4/1DC500VB1

LQX-N4/1DC600VL7



IP68 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

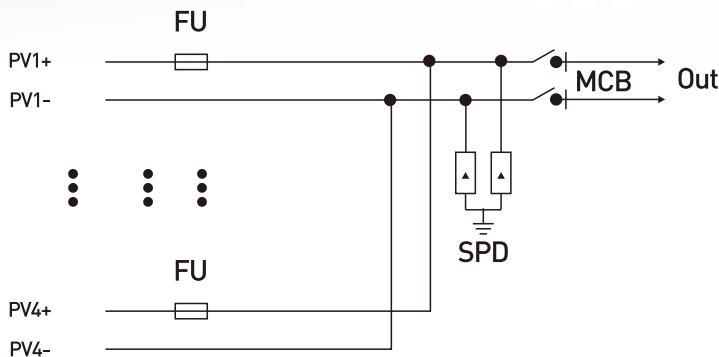

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

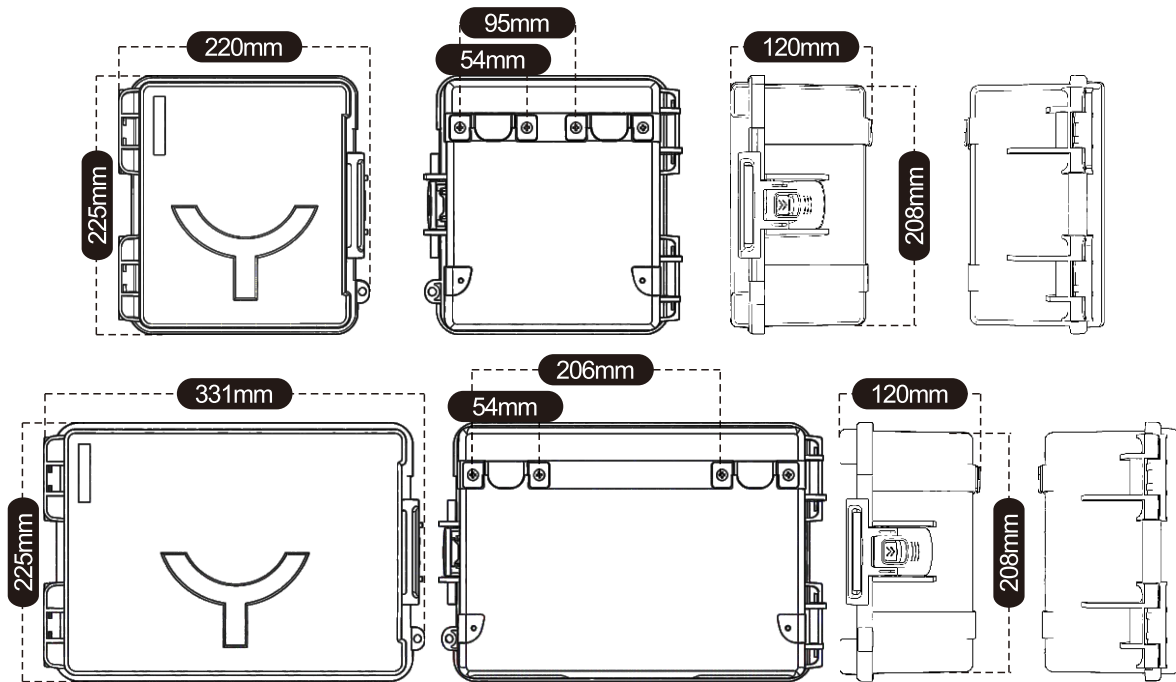

Technical data		
Model	LQX-N4/1DC500VB1	LQX-N4/1DC600VL7
String	4 in 1 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63/80/100/125	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	225*220*120mm(16~63A),225*331*120mm(80~125A)	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32~125	Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		

LQX-N4/2

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 4in 2out

DC 500/600V



LQX-N4/2DC500VB1

LQX-N4/2DC600VL7



IP68 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

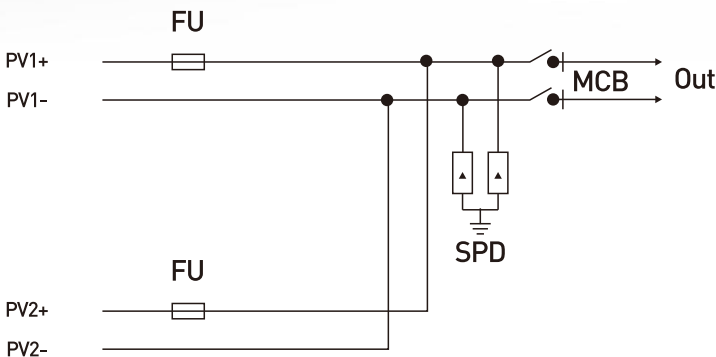

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

*Includes 2 Lines Of This Type

Product Dimension Drawing (mm)

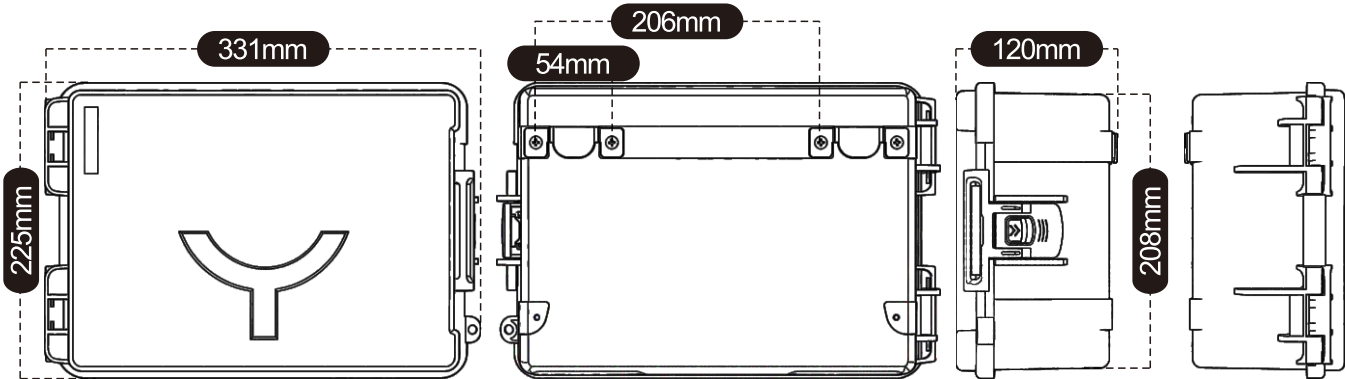

Technical data		
Model	LQX-N4/2DC500VB1	LQX-N4/2DC600VL7
String	4 in 2 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	225*331*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32/40/50/63	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		


LQX-N4/4

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 4in 4out


DC 500/600V

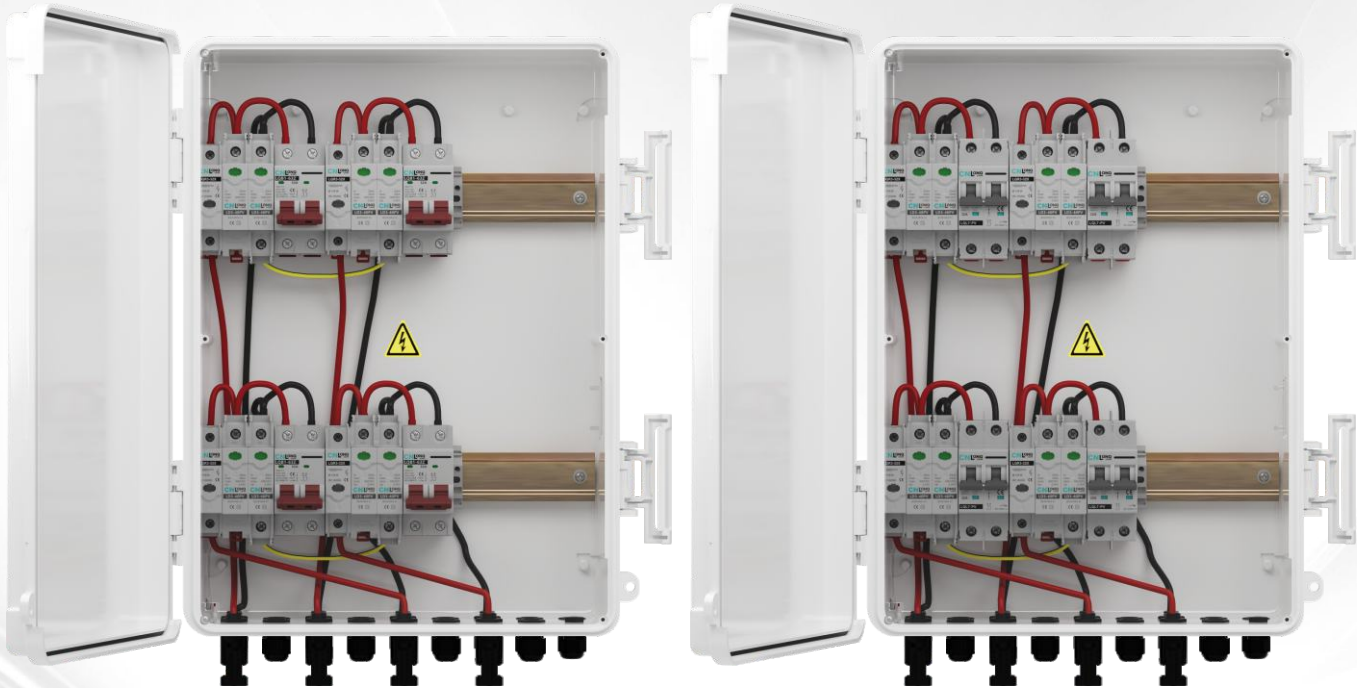

LQX-N4/4DC500VB1


LQX-N4/4DC600VL7

- IP68 outdoor waterproof and sun resistant UV-resistant
- Short-circuit protection, overload protection, lightning protection, Isolation circuit
- PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- OEM/ODM Free Customization for PV Products

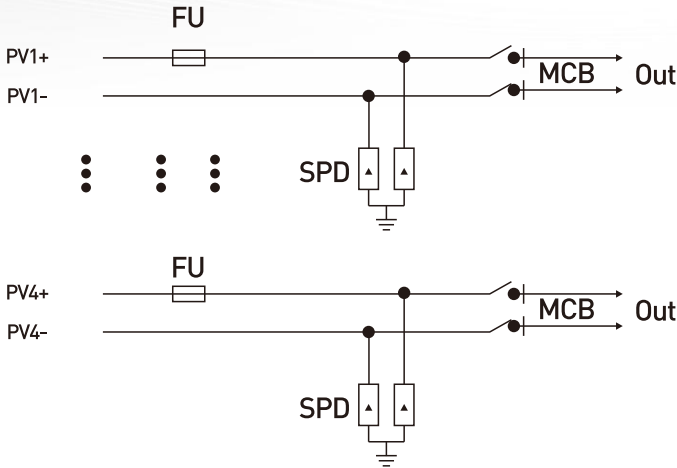

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

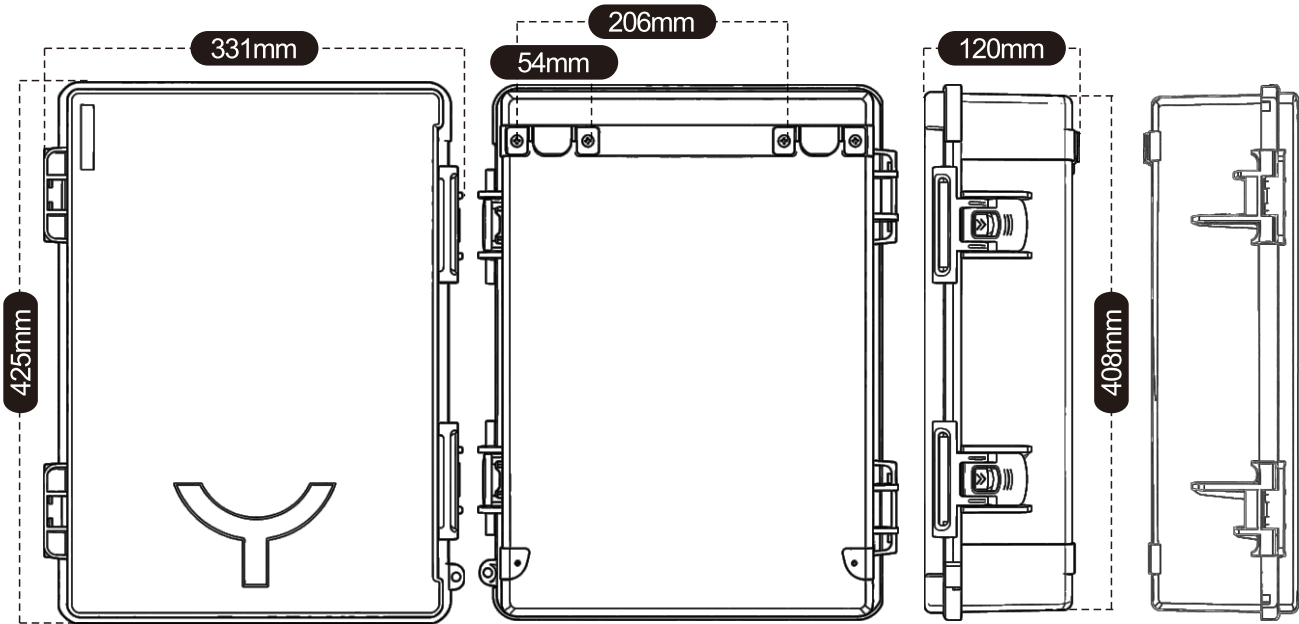

Technical data		
Model	LQX-N4/4DC500VB1	LQX-N4/4DC600VL7
String	4 in 4 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	425*331*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32/40/50/63	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		


LQX-N5/1

CE ISO 9001 R6HS IEC IP68

CN LONG.com

PV Combiner Box 5in 1out

DC 500V

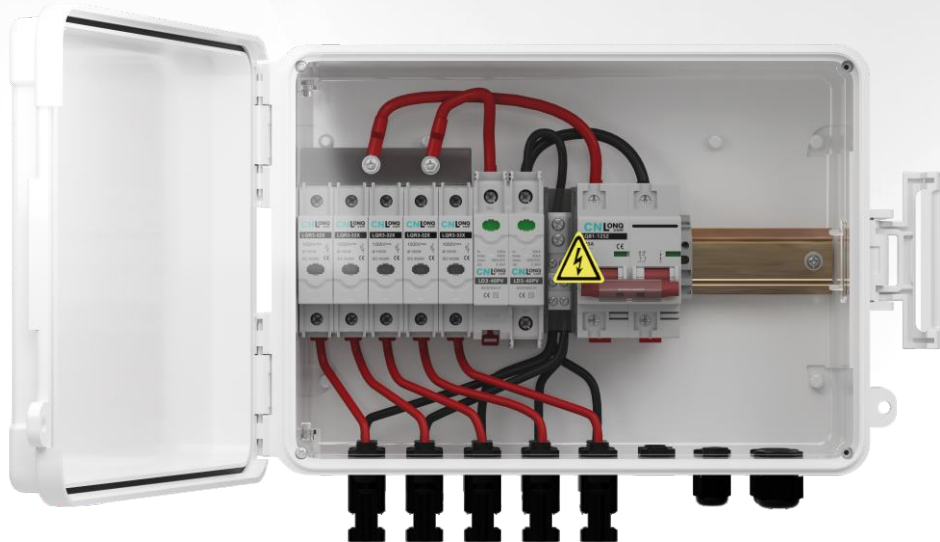


LQX-N5/1DC500VB1

IP68 outdoor waterproof and sun resistant UV-resistant

Short-circuit protection, overload protection, lightning protection, Isolation circuit


PC housing, IK10 impact resistance, flame retardant, corrosion resistant

OEM/ODM Free Customization for PV Products

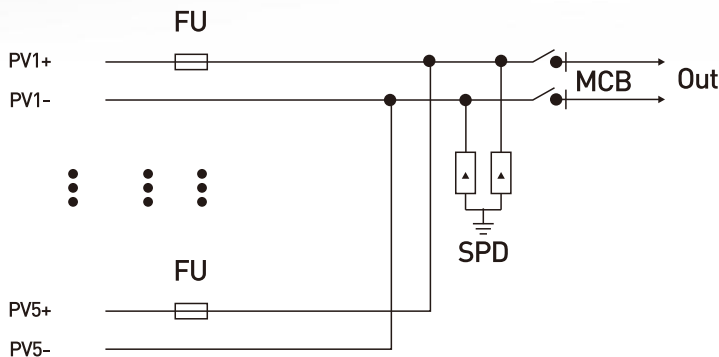

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

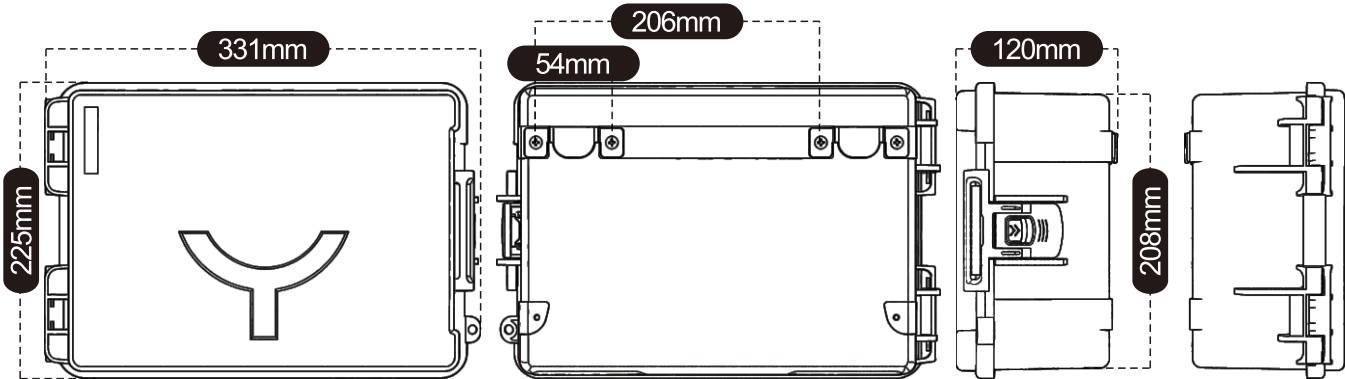

Technical data	
Model	LQX-N5/1DC500VB1
String	5 in 1 out
Rated Voltage Ue (V)	DC 500
Maximum input current per string (A)	15/20/25/30
Maximum output current per string (A)	32/40/50/63/80/100/125
Quality Certificate	CE,ISO9001,RoHS,IP68
Protection Level	IP68
Impact Level	IK10
Box Material	PC
Operating Temperature	-25°C ~ +60°C
Humidity	≤95%
Connector	MC4 or PG
Installation	Installing Wall Hooks
Altitude	2000m
Dimension (without mounting connector)	225*331*120mm

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500	Rated Voltage Ue (V)	Dc500	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32~125	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		

LQX-N6/1

CE



RoHS


IEC

IP68

CNLong.com

PV Combiner Box 6in 1out

DC 500V

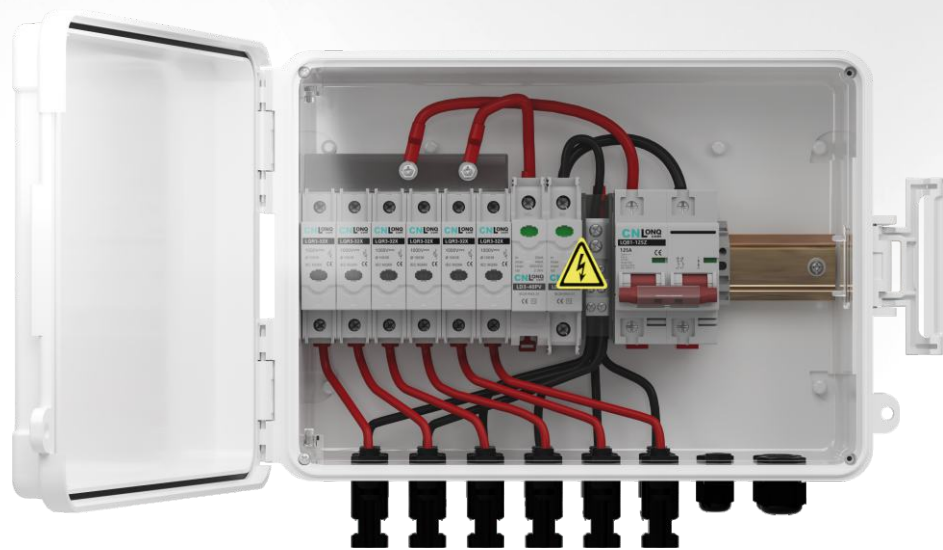

LQX-N6/1DC500VB1


- 

IP68 outdoor waterproof and sun resistant
UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

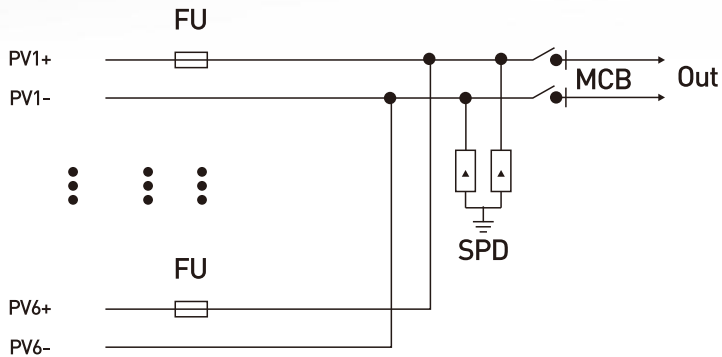

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

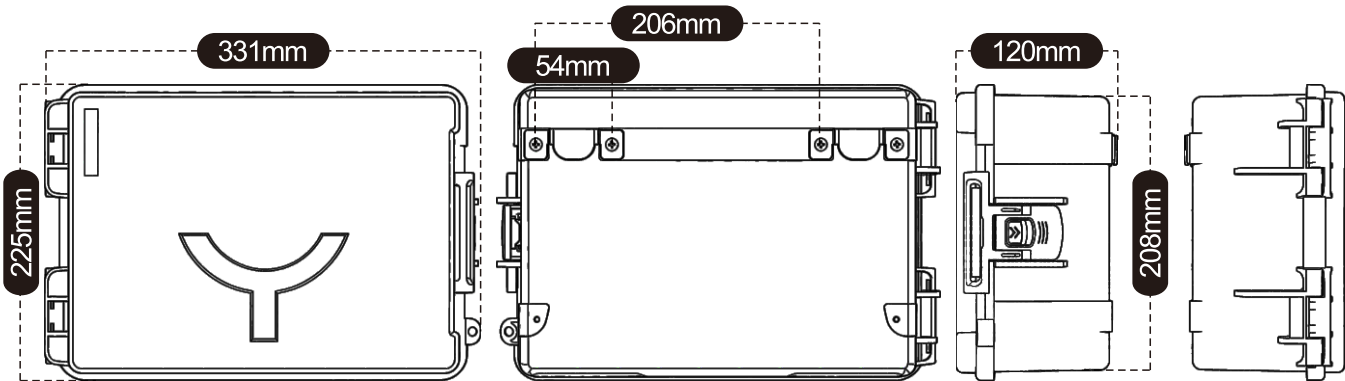

Technical data	
Model	LQX-N6/1DC500VB1
String	6 in 1 out
Rated Voltage Ue (V)	DC 500
Maximum input current per string (A)	15/20/25/30
Maximum output current per string (A)	32/40/50/63/80/100/125
Quality Certificate	CE,ISO9001,RoHS,IP68
Protection Level	IP68
Impact Level	IK10
Box Material	PC
Operating Temperature	-25°C ~ +60°C
Humidity	≤95%
Connector	MC4 or PG
Installation	Installing Wall Hooks
Altitude	2000m
Dimension (without mounting connector)	225*331*120mm

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500	Rated Voltage Ue (V)	Dc500	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32~125	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		


LQX-N6/2

CE ISO 9001 RoHS IEC IP68

CN LONGQ.com

PV Combiner Box 6in 2out

DC 500/600V

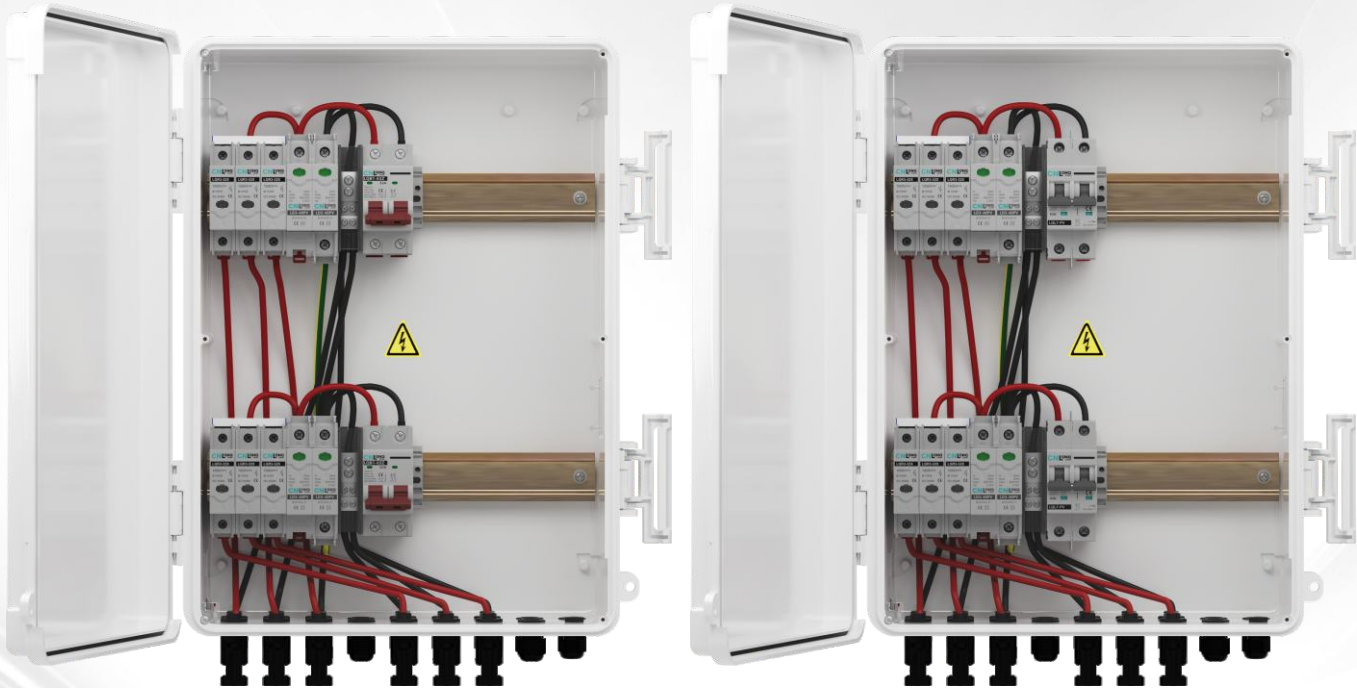

LQX-N6/2DC500VB1

LQX-N6/2DC600VL7



IP68 outdoor waterproof and sun resistant
UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

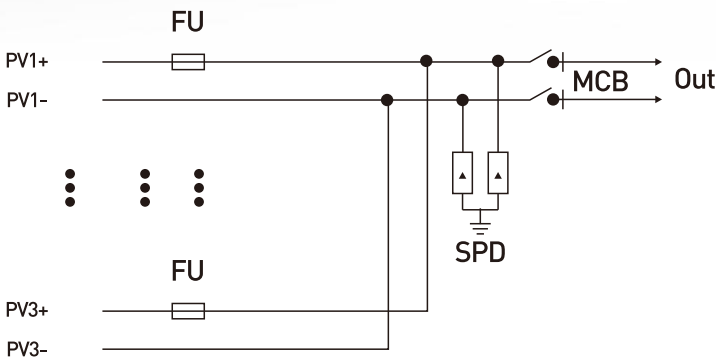

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

*Includes 2 Lines Of This Type

Product Dimension Drawing (mm)

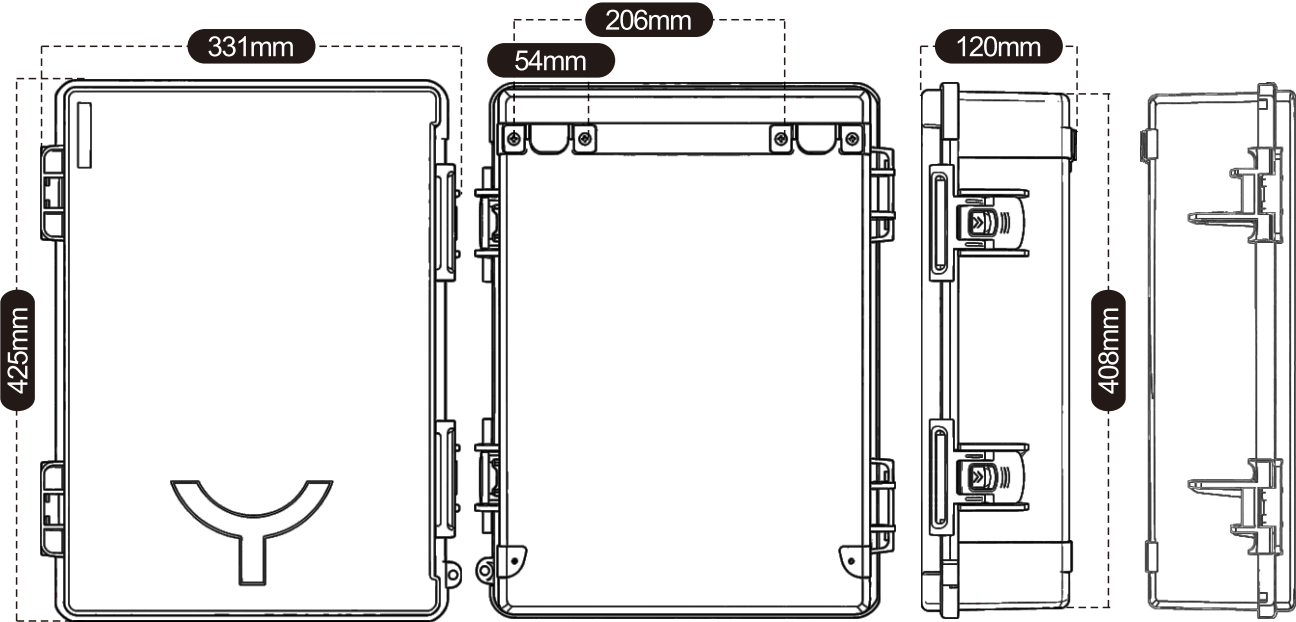

Technical data		
Model	LQX-N6/2DC500VB1	LQX-N6/2DC600VL7
String	6 in 2 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63/80/100/125	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	425*331*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32~125	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		


LQX-N6/3

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 6in 3out


DC 500/600V

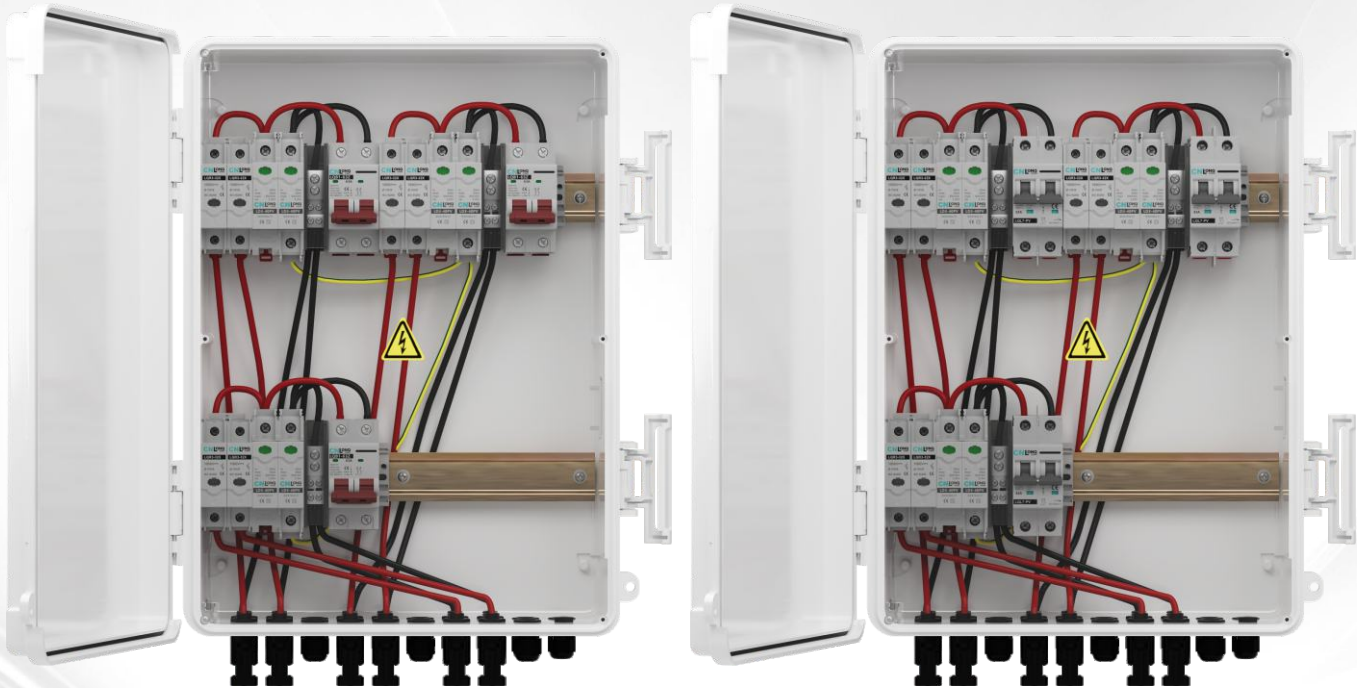

LQX-N6/3DC500VB1

LQX-N6/3DC600VL7


- IP68 outdoor waterproof and sun resistant UV-resistant
- Short-circuit protection, overload protection, lightning protection, Isolation circuit
- PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- OEM/ODM Free Customization for PV Products

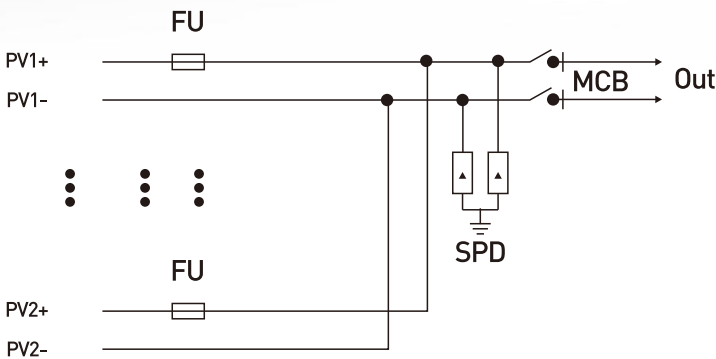

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

*Includes 3 Lines Of This Type

Product Dimension Drawing (mm)

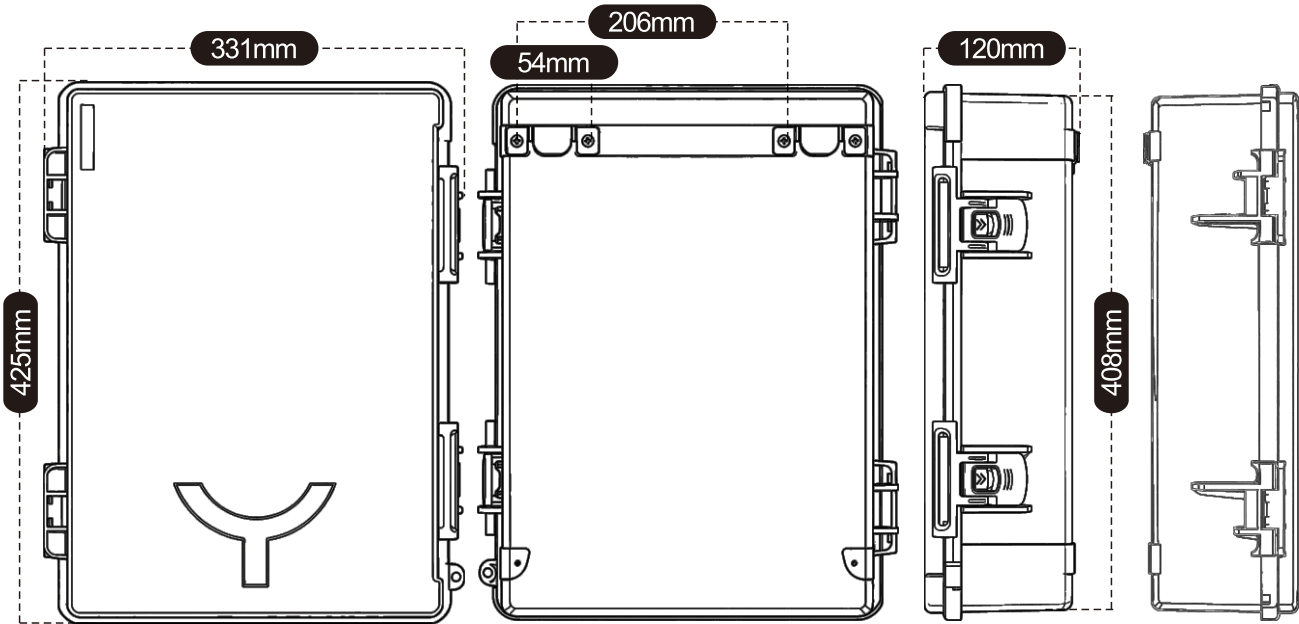

Technical data		
Model	LQX-N6/3DC500VB1	LQX-N6/3DC600VL7
String	6 in 3 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	425*331*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32/40/50/63	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		


LQX-N6/6

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 6in 6out


DC 500/600V

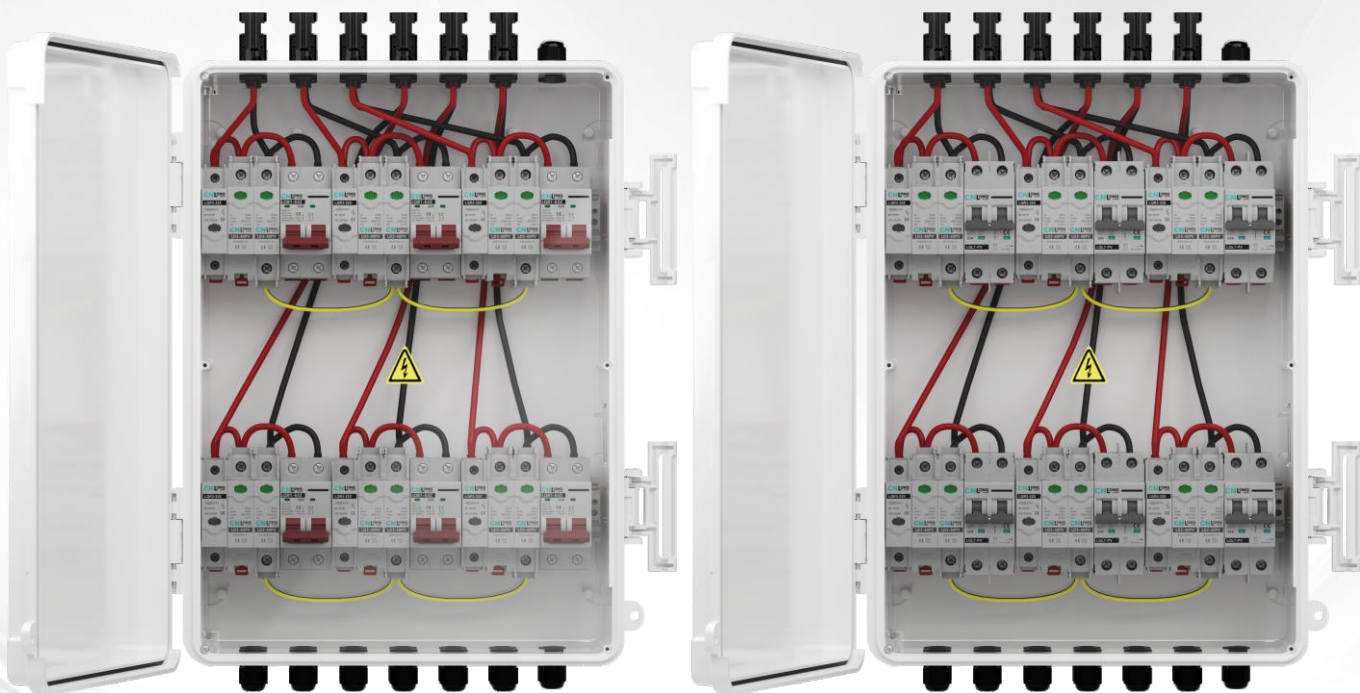

LQX-N6/6DC500VB1


LQX-N6/6DC600VL7

- IP68 outdoor waterproof and sun resistant UV-resistant
- Short-circuit protection, overload protection, lightning protection, Isolation circuit
- PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- OEM/ODM Free Customization for PV Products

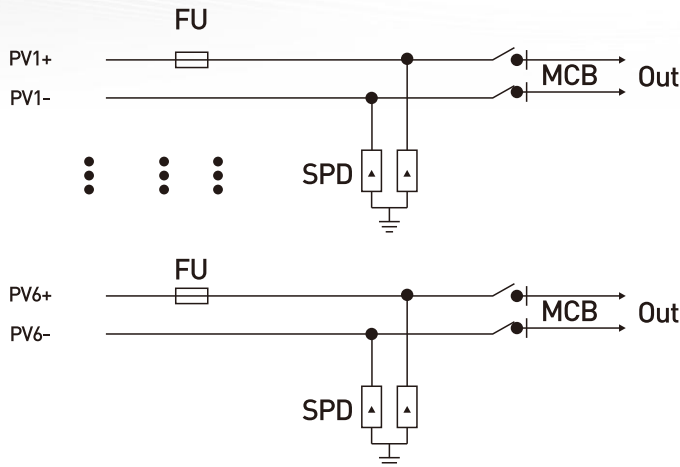

MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

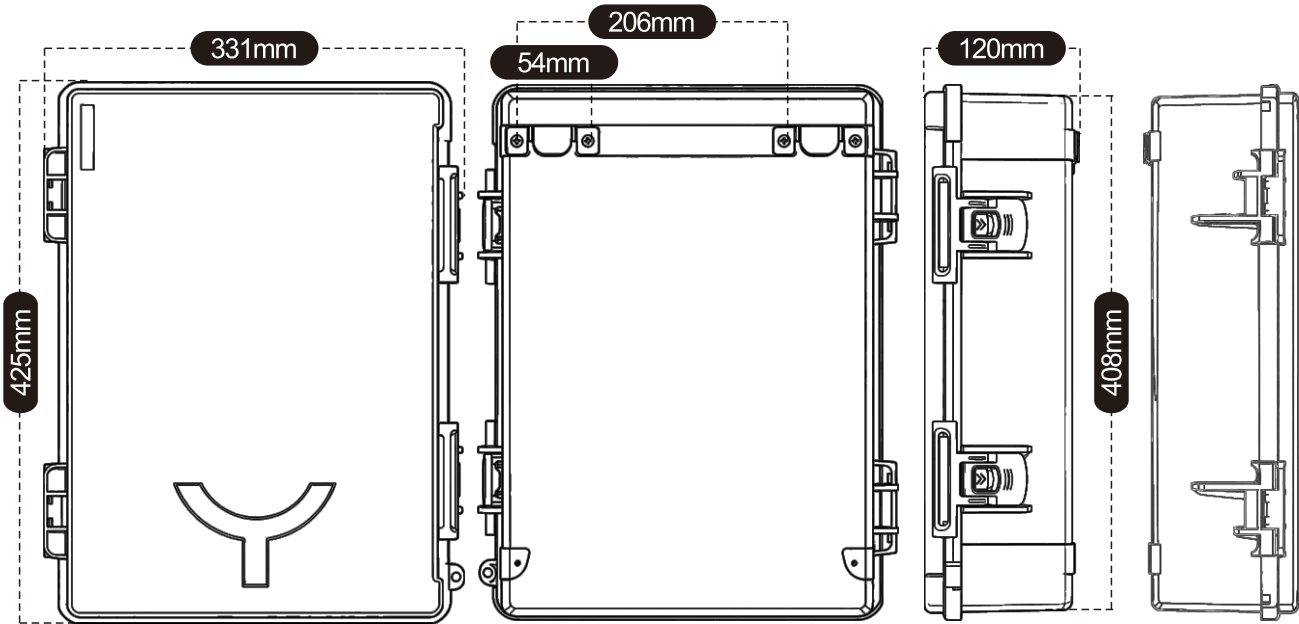

Technical data		
Model	LQX-N6/6DC500VB1	LQX-N6/6DC600VL7
String	6 in 6 out	
Rated Voltage Ue (V)	DC 500	DC 600
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	425*331*120mm	

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC500/600	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32/40/50/63	Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	2.2	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		

LQX-N1/1
















IP68

PV Combiner Box 1in 1out

DC 1000V

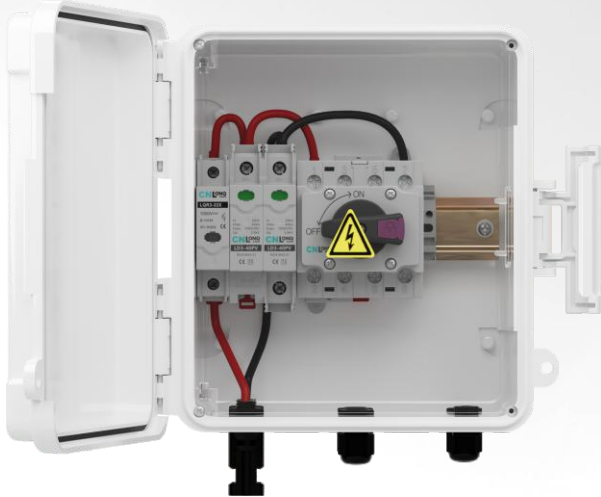

LQX-N1/1DC1000VQ



LQX-N1/1DC1000VB1



LQX-N1/1DC1000VL7


- 

IP68 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

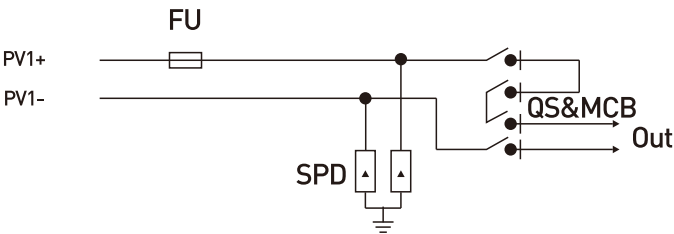

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

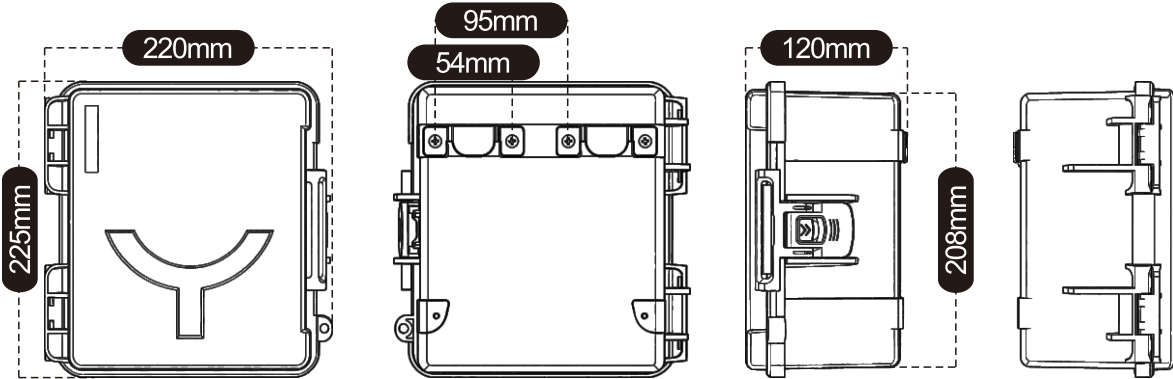

Technical data			
Model	LQX-N1/1DC1000VQ	DC1000VB1	DC1000VL7
String	1 in 1 out		
Rated Voltage Ue (V)	DC 1000		
Maximum input current per string (A)	15/20/25/30		
Maximum output current per string (A)	32	32/40/50/63	32/40/50/63
Quality Certificate	TUV,CE,ISO9001,RoHS,UKCA,CB,IP68		
Protection Level	IP68		
Impact Level	IK10		
Box Material	PC		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Installing Wall Hooks		
Altitude	2000m		
Dimension (without mounting connector)	225*220*120mm		

	QS Q	MCB B1/L7	SPD	FUSE
Ue (V)	DC1200	DC1000/1200	Rated Voltage Ue (V) DC1000	Rated Voltage Ue (V) DC1000
Ui (V)	DC1500	DC1000/1200	In (8/20)us (kA) 20	Rated Current In(A) 15/20/25/30
In (A)	32	32/40/50/63	I _{max} (8/20)us (kA) 40	Fuse Size (mm) 10*38
Icu (kA)	/	6	Protection Level (kV) 3.6	Standard IEC60269
standard	IEC 60947-3	IEC 60947-2	standard IEC 61643-31	

LQX-N2/1
















IP68

CN**LONG**Q.com

PV Combiner Box 2in 1out

DC 1000V

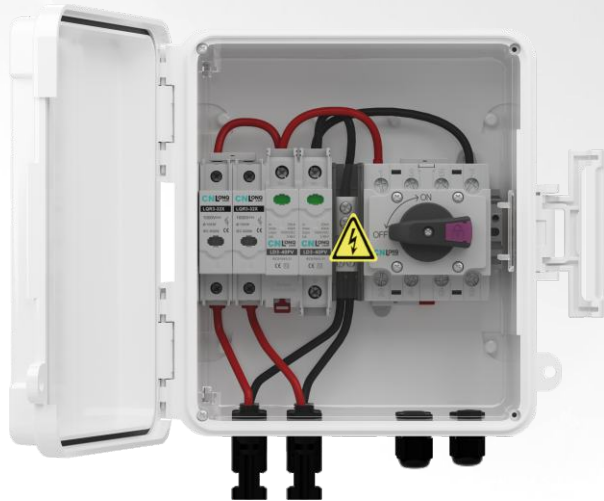

LQX-N2/1DC1000VQ



LQX-N2/1DC1000VB1



LQX-N2/1DC1000VL7


- 

IP68 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

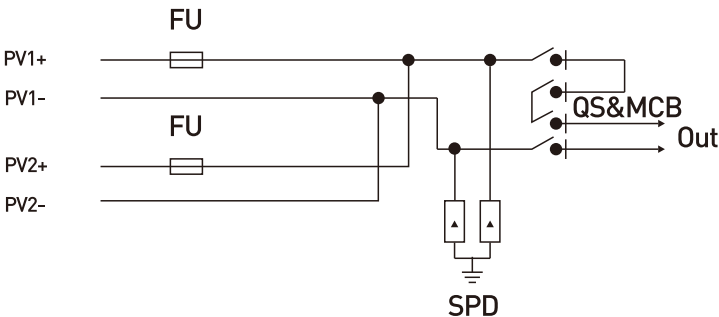

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

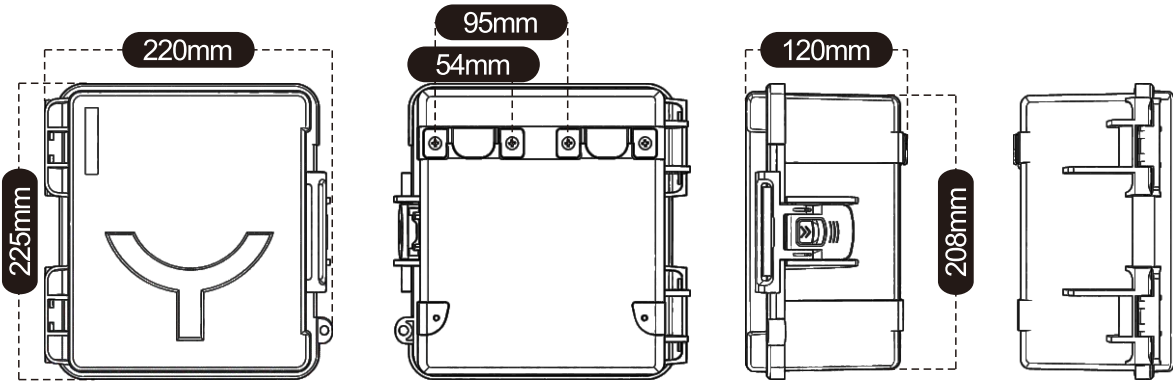

Technical data			
Model	LQX-N2/1DC1000VQ	DC1000VB1	DC1000VL7
String	2 in 1 out		
Rated Voltage Ue (V)	DC 1000		
Maximum input current per string (A)	15/20/25/30		
Maximum output current per string (A)	32	32/40/50/63	32/40/50/63
Quality Certificate	TUV,CE,ISO9001,RoHS,UKCA,CB,IP68		
Protection Level	IP68		
Impact Level	IK10		
Box Material	PC		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Installing Wall Hooks		
Altitude	2000m		
Dimension (without mounting connector)	225*220*120mm		

	QS Q	MCB B1/L7	SPD	FUSE
Ue (V)	DC1200	DC1000/1200	Rated Voltage Ue (V) DC1000	Rated Voltage Ue (V) DC1000
Ui (V)	DC1500	DC1000/1200	In (8/20)us (kA) 20	Rated Current In(A) 15/20/25/30
In (A)	32	32/40/50/63	I _{max} (8/20)us (kA) 40	Fuse Size (mm) 10*38
Icu (kA)	/	6	Protection Level (kV) 3.6	Standard IEC60269
standard	IEC 60947-3	IEC 60947-2	standard IEC 61643-31	

LQX-N2/2
















IP68

PV Combiner Box 2in 2out


DC 1000V

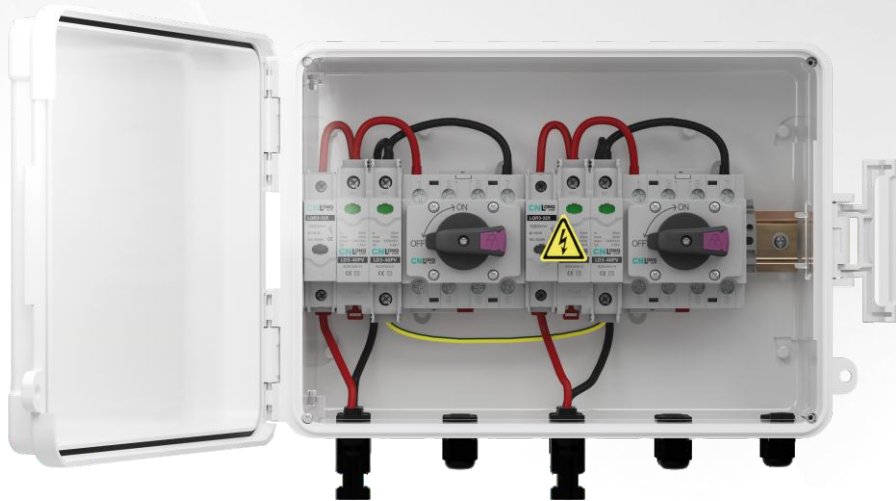

LQX-N2/2DC1000VQ



LQX-N2/2DC1000VB1

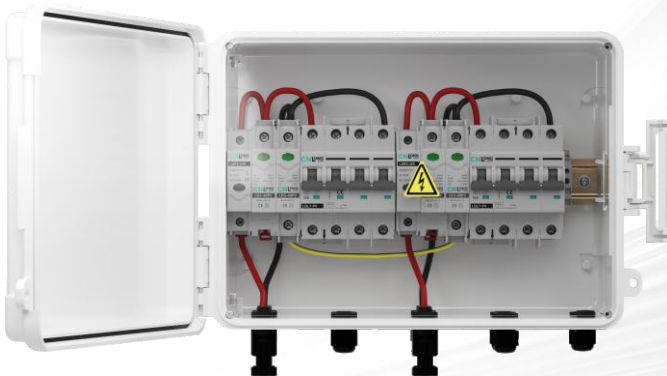

LQX-N2/2DC1000VL7


- 

IP68 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 

PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- 


OEM/ODM Free Customization for PV Products

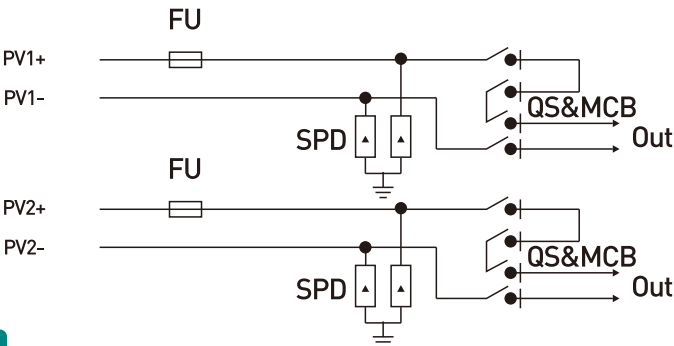

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

CN LONGQ.com

Product Dimension Drawing (mm)

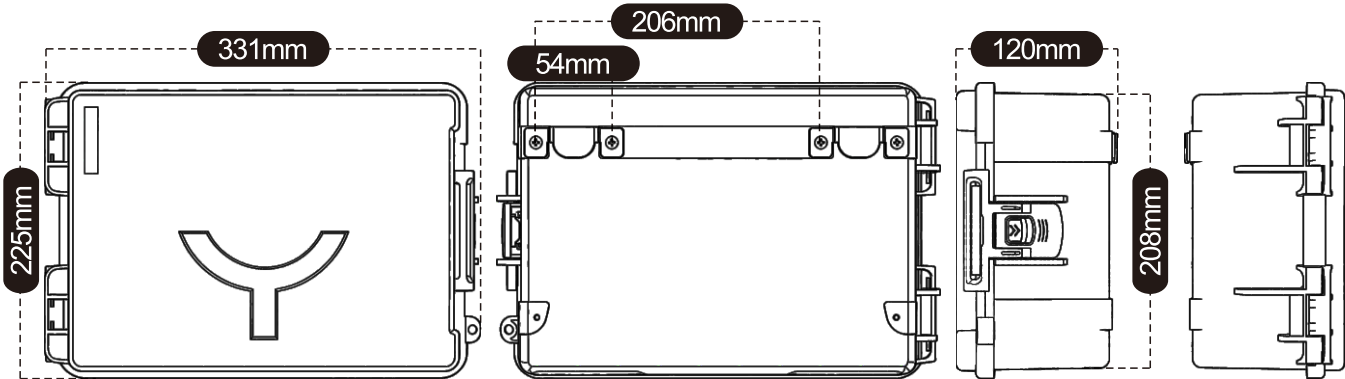

Technical data			
Model	LQX-N2/2DC1000VQ	DC1000VB1	DC1000VL7
String	2 in 2 out		
Rated Voltage Ue (V)	DC 1000		
Maximum input current per string (A)	15/20/25/30		
Maximum output current per string (A)	32	32/40/50/63	32/40/50/63
Quality Certificate	TUV,CE,ISO9001,RoHS,UKCA,CB,IP68		
Protection Level	IP68		
Impact Level	IK10		
Box Material	PC		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Installing Wall Hooks		
Altitude	2000m		
Dimension (without mounting connector)	225*331*120mm		

	QS Q	MCB B1/L7	SPD	FUSE
Ue (V)	DC1200	DC1000/1200	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1500	DC1000/1200	In (8/20)us (kA)	20
In (A)	32	32/40/50/63	Imax (8/20)us (kA)	40
Icu (kA)	/	6	Protection Level (kV)	3.6
standard	IEC 60947-3	IEC 60947-2	standard	IEC 61643-31
			Rated Voltage Ue (V)	DC1000
			Rated Current In(A)	15/20/25/30
			Fuse Size (mm)	10*38
			Standard	IEC60269

LQX-N3/1

CE ISO 9001 R&HS IEC IP68

CN LONGQ.com

PV Combiner Box 3in 1out

DC 1000V



LQX-N3/1DC1000VB1

LQX-N3/1DC1000VL7



IP68 outdoor waterproof and sun resistant
UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

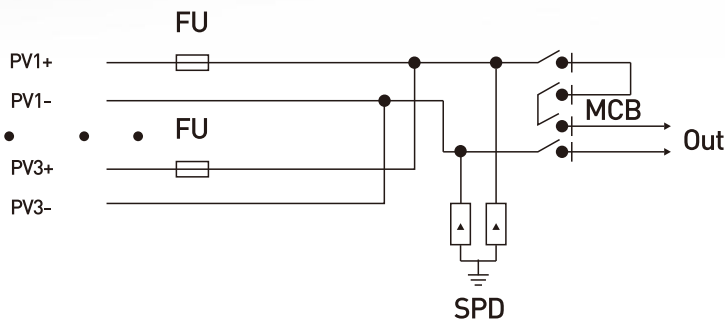

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

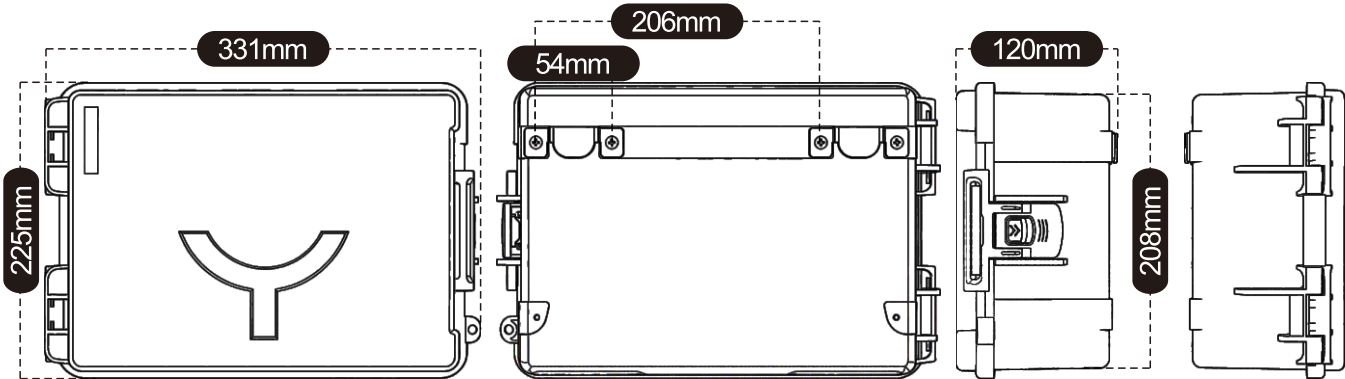

Technical data		
Model	LQX-N3/1DC1000VB1	LQX-N3/1DC1000VL7
String	3 in 1 out	
Rated Voltage Ue (V)	DC 1000	
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63/80/100/125	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	225*331*120mm	

MCB	B1	L7	SPD	FUSE
Rated Voltage Ue (V)	DC1000	DC1200	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000	DC1200	In (8/20)us (kA)	20
Rated Current In(A)	32~125		Imax (8/20)us (kA)	40
Icu (kA)	6		Protection Level (kV)	3.6
standard	IEC 60947-2		standard	IEC 61643-31
			Rated Voltage Ue (V)	DC1000
			Rated Current In(A)	15/20/25/30
			Fuse Size (mm)	10*38
			Standard	IEC60269

LQX-N3/3















IP68

CN**LONG**.com

PV Combiner Box 3in 3out

DC 1000V



LQX-N3/3DC1000VQ



LQX-N3/3DC1000VB1



LQX-N3/3DC1000VL7


- 

IP68 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

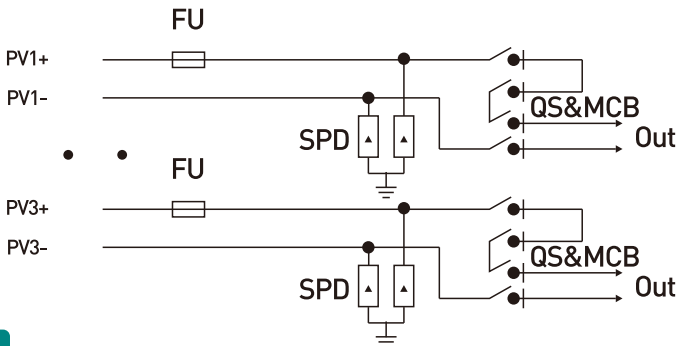

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

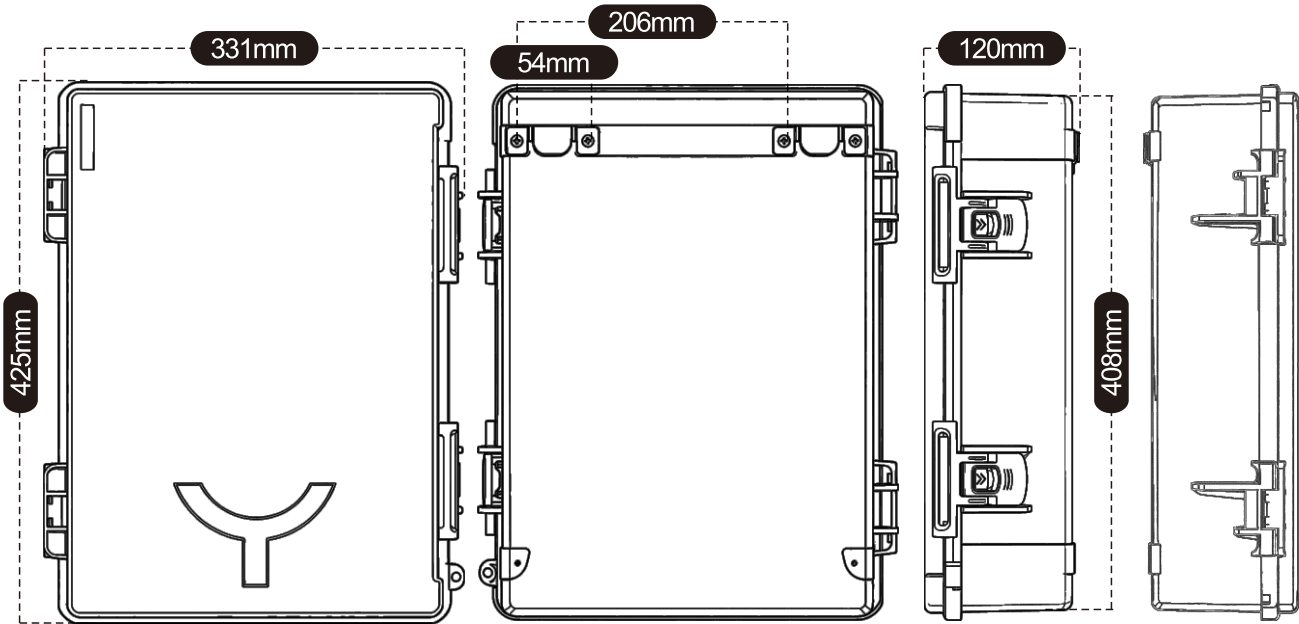

Technical data			
Model	LQX-N3/3DC1000VQ	DC1000VB1	DC1000VL7
String	3 in 3 out		
Rated Voltage Ue (V)	DC 1000		
Maximum input current per string (A)	15/20/25/30		
Maximum output current per string (A)	32	32/40/50/63	32/40/50/63
Quality Certificate	TUV,CE,ISO9001,RoHS,UKCA,CB,IP68		
Protection Level	IP68		
Impact Level	IK10		
Box Material	PC		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Installing Wall Hooks		
Altitude	2000m		
Dimension (without mounting connector)	425*331*120mm		

	QS Q	MCB B1/L7	SPD		FUSE	
Ue (V)	DC1200	DC1000/1200	Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1500	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
In(A)	32	32/40/50/63	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	/	6	Protection Level (kV)	3.6	Standard	IEC60269
standard	IEC 60947-3	IEC 60947-2	standard	IEC 61643-31		

LQX-N4/1

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 4in 1out

DC 1000V



LQX-N4/1DC1000VB1

LQX-N4/1DC1000VL7



IP68 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

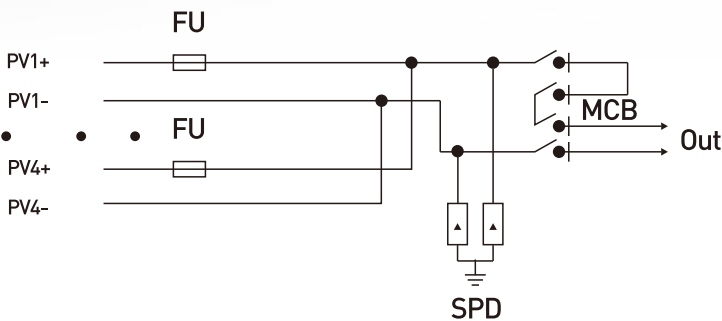

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

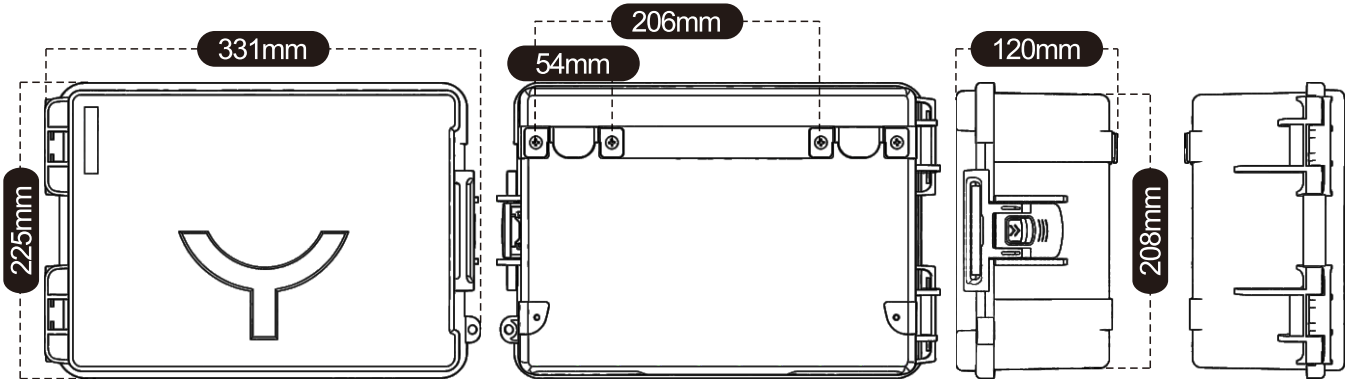

Technical data		
Model	LQX-N4/1DC1000VB1	LQX-N4/1DC1000VL7
String	4 in 1 out	
Rated Voltage Ue (V)	DC 1000	
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63/80/100/125	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	225*331*120mm	

MCB	B1	L7	SPD	FUSE
Rated Voltage Ue (V)	DC1000	DC1200	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000	DC1200	In (8/20)us (kA)	20
Rated Current In(A)	32~125		Imax (8/20)us (kA)	40
Icu (kA)	6		Protection Level (kV)	3.6
standard	IEC 60947-2		standard	IEC 61643-31
			Rated Voltage Ue (V)	DC1000
			Rated Current In(A)	15/20/25/30
			Fuse Size (mm)	10*38
			Standard	IEC60269


LQX-N4/2

TÜV Rheinland CE ISO 9001 RoHS IEC UK CA CB IP68

CN LONG.com

PV Combiner Box 4in 2out


DC 1000V

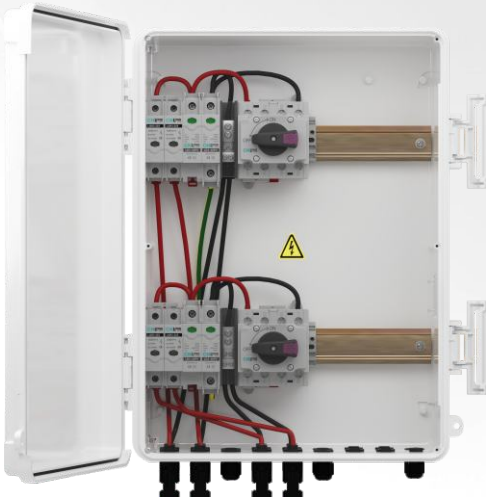

LQX-N4/2DC1000VQ



LQX-N4/2DC1000VB1

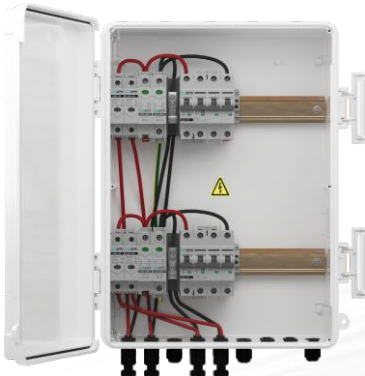

LQX-N4/2DC1000VL7


- 

IP68 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 

PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- 


OEM/ODM Free Customization for PV Products

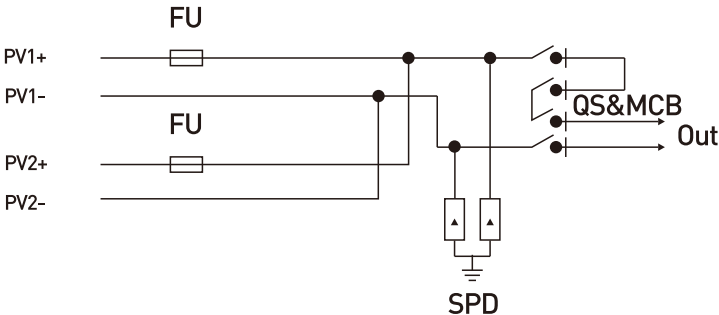

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

*Includes 2 Lines Of This Type

Product Dimension Drawing (mm)

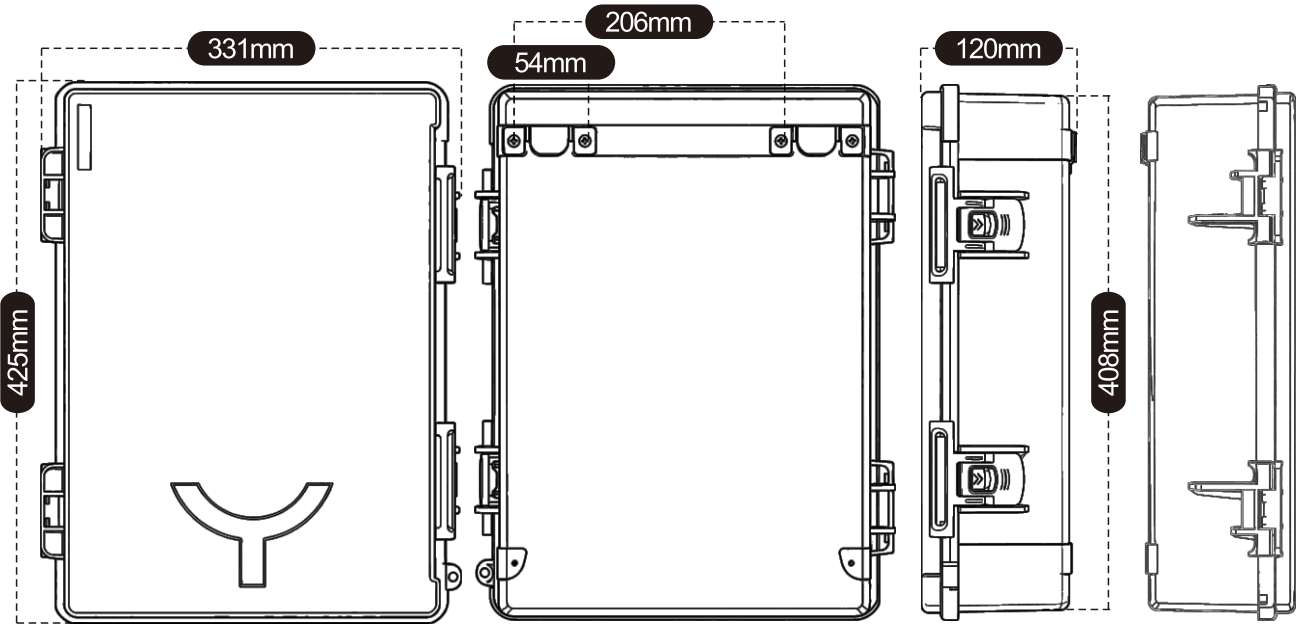

Technical data			
Model	LQX-N4/2DC1000VQ	DC1000VB1	DC1000VL7
String	4 in 2 out		
Rated Voltage Ue (V)	DC 1000		
Maximum input current per string (A)	15/20/25/30		
Maximum output current per string (A)	32	32/40/50/63	32/40/50/63
Quality Certificate	TUV,CE,ISO9001,RoHS,UKCA,CB,IP68		
Protection Level	IP68		
Impact Level	IK10		
Box Material	PC		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Installing Wall Hooks		
Altitude	2000m		
Dimension (without mounting connector)	425*331*120mm		

	QS Q	MCB B1/L7	SPD	FUSE
Ue (V)	DC1200	DC1000/1200	Rated Voltage Ue (V) DC1000	Rated Voltage Ue (V) DC1000
Ui (V)	DC1500	DC1000/1200	In (8/20)us (kA) 20	Rated Current In(A) 15/20/25/30
In(A)	32	32/40/50/63	Imax (8/20)us (kA) 40	Fuse Size (mm) 10*38
Icu (kA)	/	6	Protection Level (kV) 3.6	Standard IEC60269
standard	IEC 60947-3	IEC 60947-2	standard IEC 61643-31	

LQX-N4/4
















IP68

CN**LONG**Q.com

PV Combiner Box 4in 4out


DC 1000V

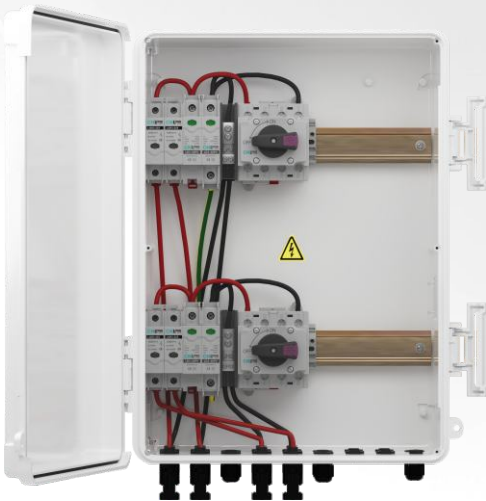

LQX-N4/4DC1000VQ



LQX-N4/4DC1000VB1

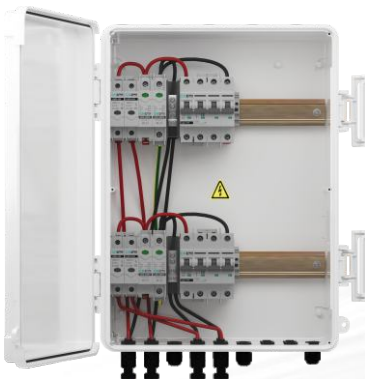

LQX-N4/4DC1000VL7


- 

IP68 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

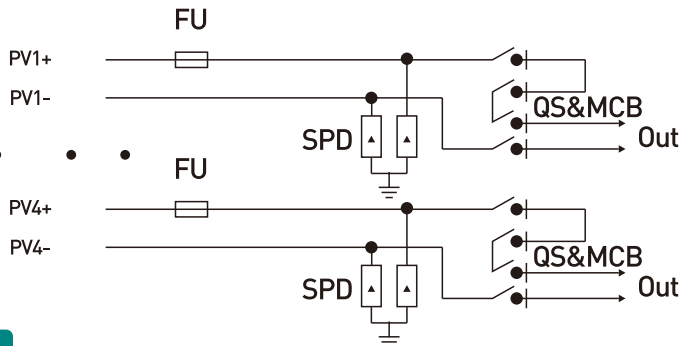

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

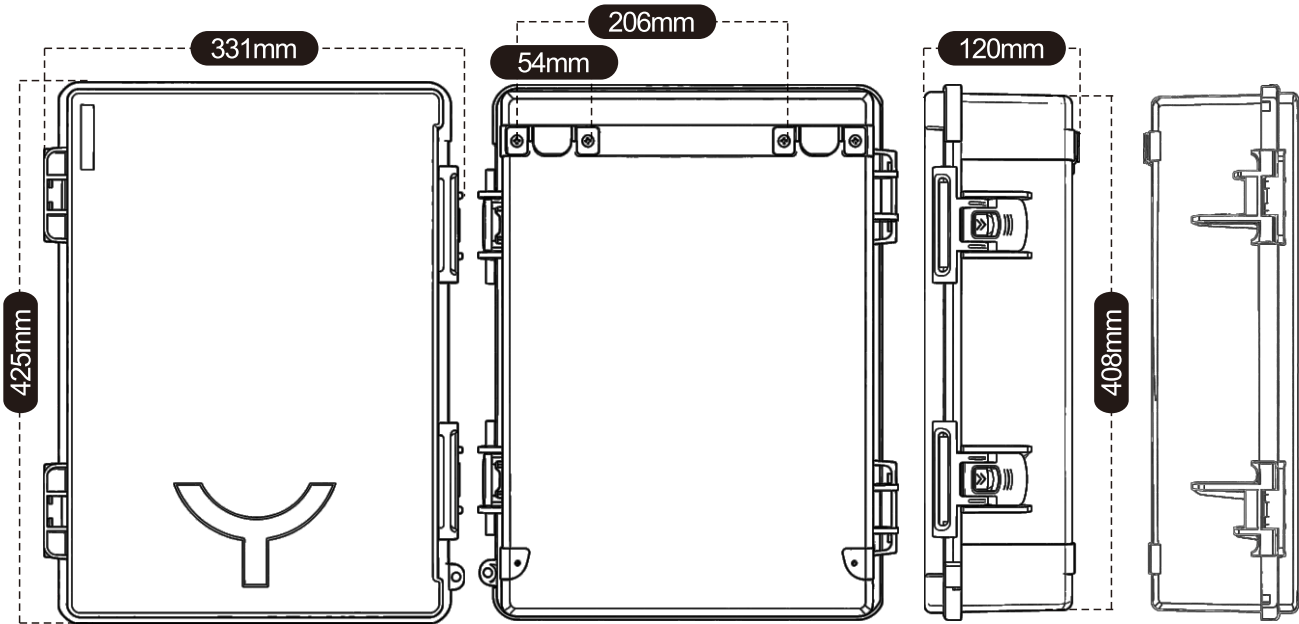

Technical data			
Model	LQX-N4/4DC1000VQ	DC1000VB1	DC1000VL7
String	4 in4 out		
Rated Voltage Ue (V)	DC 1000		
Maximum input current per string (A)	15/20/25/30		
Maximum output current per string (A)	32	32/40/50/63	32/40/50/63
Quality Certificate	TUV,CE,ISO9001,RoHS,UKCA,CB,IP68		
Protection Level	IP68		
Impact Level	IK10		
Box Material	PC		
Operating Temperature	-25°C ~ +60°C		
Humidity	≤95%		
Connector	MC4 or PG		
Installation	Installing Wall Hooks		
Altitude	2000m		
Dimension (without mounting connector)	425*331*120mm		

	QS Q	MCB B1/L7	SPD		FUSE	
Ue (V)	DC1200	DC1000/1200	Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1500	DC1000/1200	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
In(A)	32	32/40/50/63	Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	/	6	Protection Level (kV)	3.6	Standard	IEC60269
standard	IEC 60947-3	IEC 60947-2	standard	IEC 61643-31		


LQX-N5/1

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 5in 1out

DC 1000V

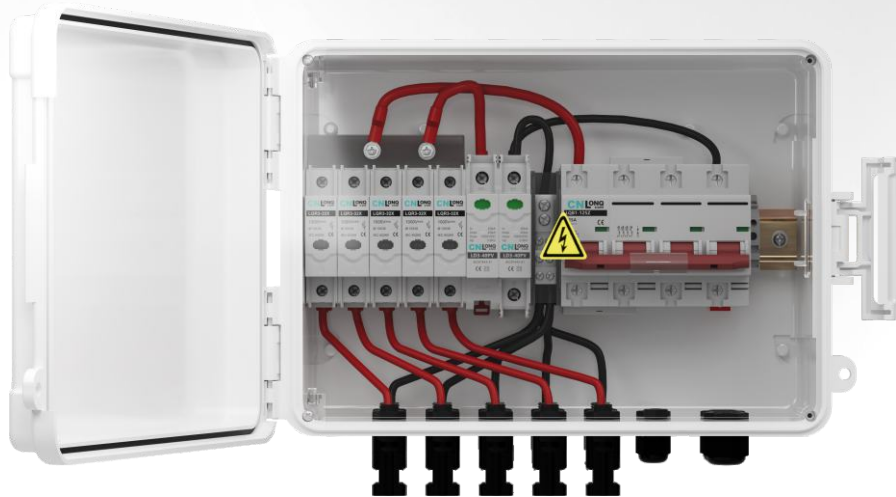

LQX-N5/1DC1000VB1



IP68 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

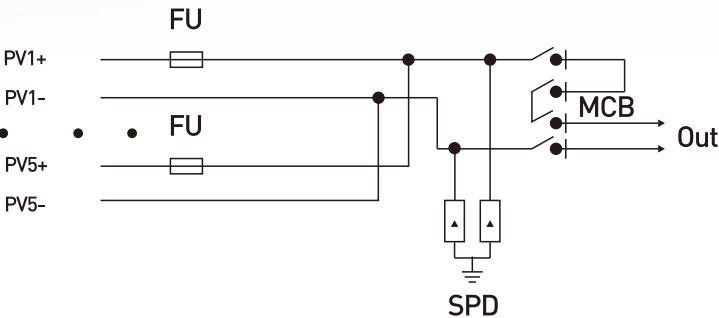

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

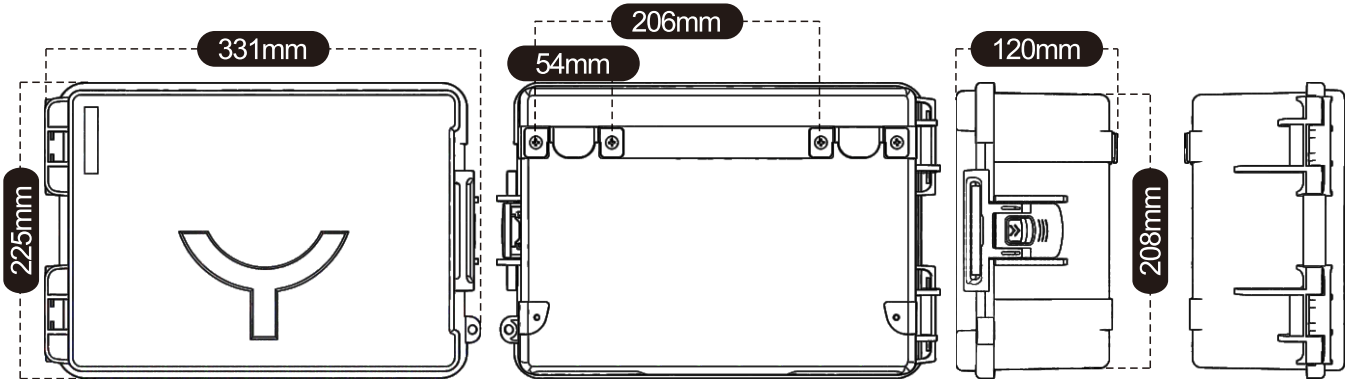

Technical data	
Model	LQX-N5/1DC1000VB1
String	5 in 1 out
Rated Voltage Ue (V)	DC 1000
Maximum input current per string (A)	15/20/25/30
Maximum output current per string (A)	32/40/50/63/80/100/125
Quality Certificate	CE,ISO9001,RoHS,IP68
Protection Level	IP68
Impact Level	IK10
Box Material	PC
Operating Temperature	-25°C ~ +60°C
Humidity	≤95%
Connector	MC4 or PG
Installation	Installing Wall Hooks
Altitude	2000m
Dimension (without mounting connector)	225*331*120mm

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32~125	I _{max} (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	3.6	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		


LQX-N6/1

CE ISO 9001 RoHS IEC IP68

CNLong.com

PV Combiner Box 6in 1out

DC 1000V

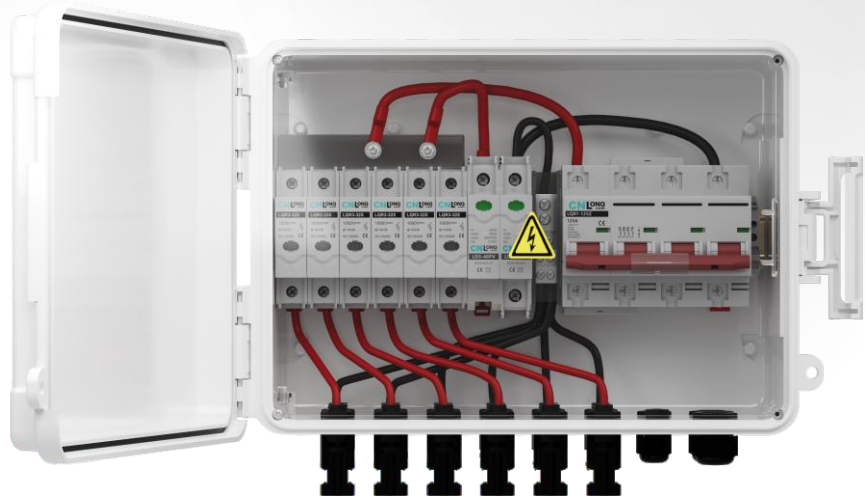

LQX-N5/1DC1000VB1


- 

IP68 outdoor waterproof and sun resistant UV-resistant
- 

Short-circuit protection, overload protection, lightning protection, Isolation circuit
- 


PC housing, IK10 impact resistance, flame retardant, corrosion resistant
- 

OEM/ODM Free Customization for PV Products

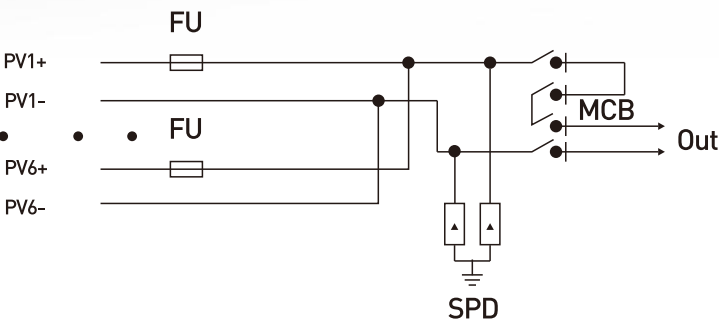

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

Product Dimension Drawing (mm)

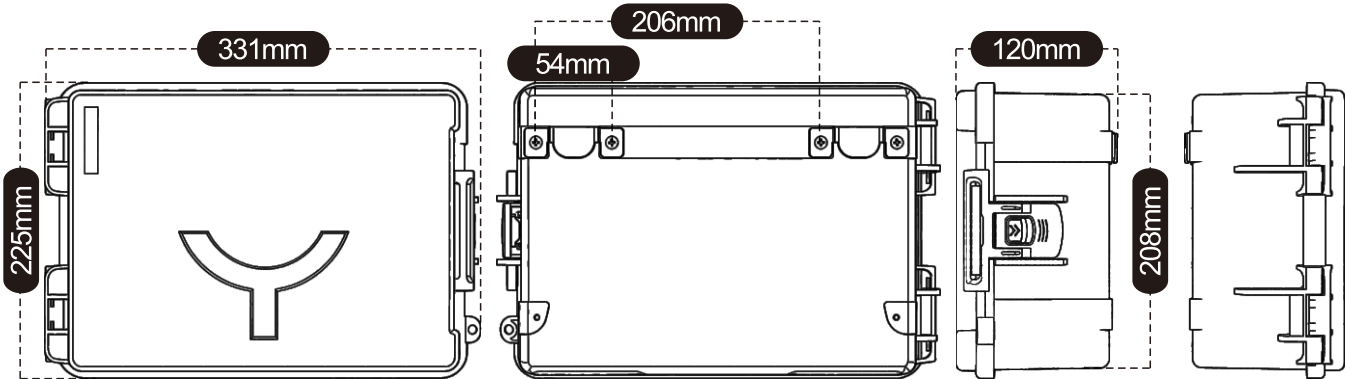

Technical data	
Model	LQX-N6/1DC1000VB1
String	6 in 1 out
Rated Voltage Ue (V)	DC 1000
Maximum input current per string (A)	15/20/25/30
Maximum output current per string (A)	32/40/50/63/80/100/125
Quality Certificate	CE,ISO9001,RoHS,IP68
Protection Level	IP68
Impact Level	IK10
Box Material	PC
Operating Temperature	-25°C ~ +60°C
Humidity	≤95%
Connector	MC4 or PG
Installation	Installing Wall Hooks
Altitude	2000m
Dimension (without mounting connector)	225*331*120mm

MCB		SPD		FUSE	
Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1000	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000	In (8/20)us (kA)	20	Rated Current In(A)	15/20/25/30
Rated Current In(A)	32~125	Imax (8/20)us (kA)	40	Fuse Size (mm)	10*38
Icu (kA)	6	Protection Level (kV)	3.6	Standard	IEC60269
standard	IEC 60947-2	standard	IEC 61643-31		


LQX-N6/2

CE ISO 9001 RoHS IEC IP68

CN LONGQ.com

PV Combiner Box 6in 2out

DC 1000V

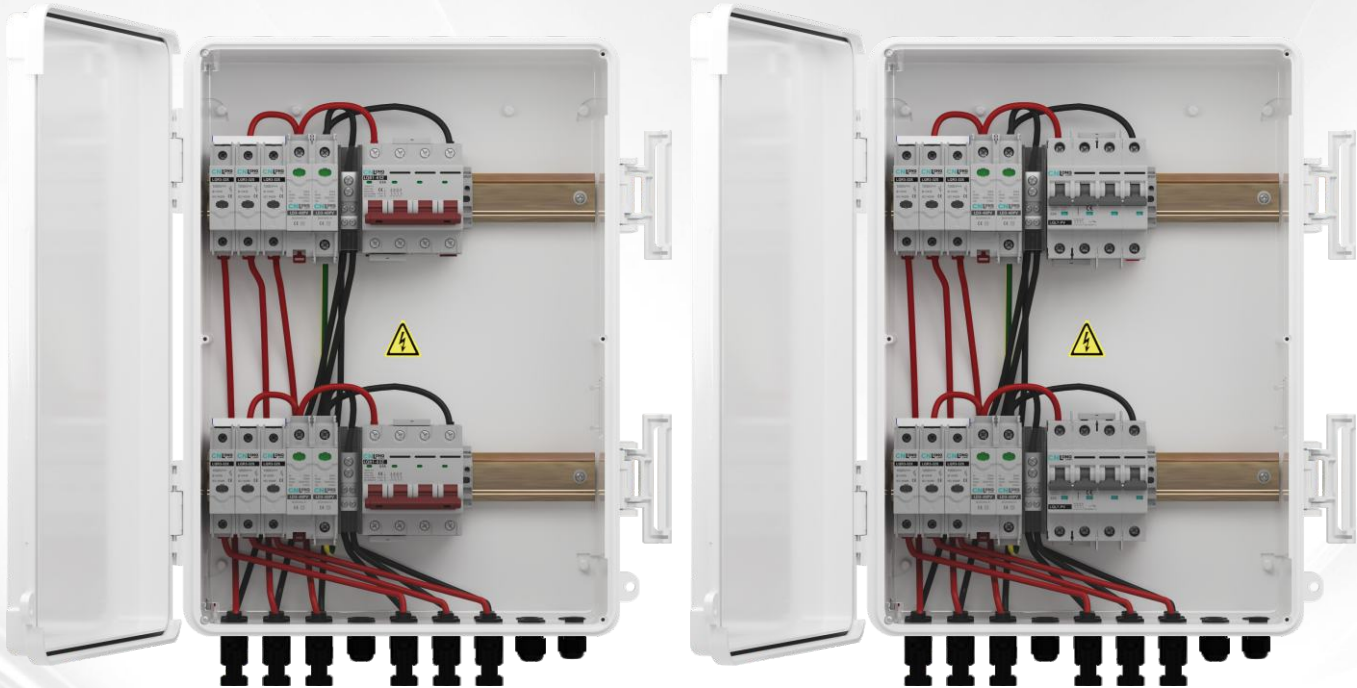

LQX-N6/2DC500VB1

LQX-N6/2DC600VL7



IP68 outdoor waterproof and sun resistant UV-resistant




Short-circuit protection, overload protection, lightning protection, Isolation circuit



PC housing, IK10 impact resistance, flame retardant, corrosion resistant




OEM/ODM Free Customization for PV Products

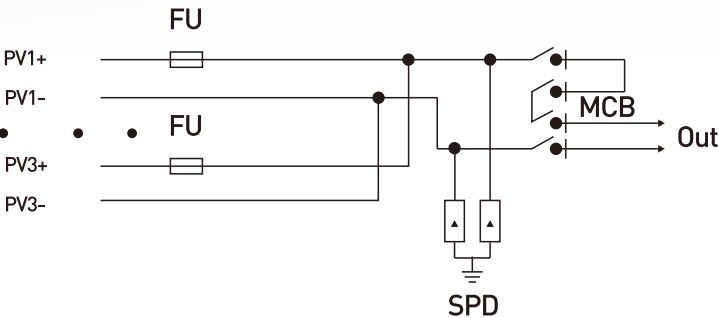

QS: Switch-Disconnect Isolator
MCB: Miniature Circuit Breaker
FU: Fuse+Fuse holder
SPD: Surge Protection Device

*Includes 2 Lines Of This Type

Product Dimension Drawing (mm)

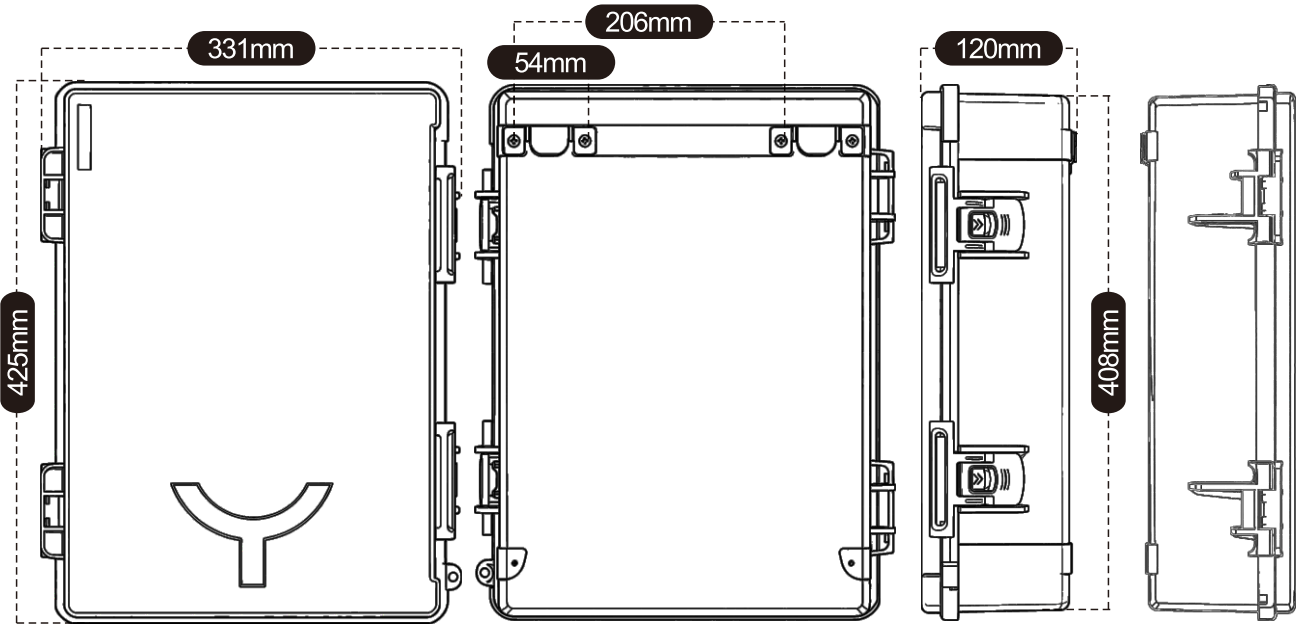

Technical data		
Model	LQX-N6/2DC1000VB1	LQX-N6/2DC1000VL7
String	6 in 2 out	
Rated Voltage Ue (V)	DC1000	
Maximum input current per string (A)	15/20/25/30	
Maximum output current per string (A)	32/40/50/63/80/100/125	32/40/50/63
Quality Certificate	CE,ISO9001,RoHS,IP68	
Protection Level	IP68	
Impact Level	IK10	
Box Material	PC	
Operating Temperature	-25°C ~ +60°C	
Humidity	≤95%	
Connector	MC4 or PG	
Installation	Installing Wall Hooks	
Altitude	2000m	
Dimension (without mounting connector)	425*331*120mm	

MCB	B1	L7	SPD	FUSE
Rated Voltage Ue (V)	DC1000	DC1200	Rated Voltage Ue (V)	DC1000
Ui (V)	DC1000	DC1200	In (8/20)us (kA)	20
Rated Current In(A)	32~125		Imax (8/20)us (kA)	40
Icu (kA)	6		Protection Level (kV)	3.6
standard	IEC 60947-2	standard	IEC 61643-31	
			Rated Voltage Ue (V)	DC1000
			Rated Current In(A)	15/20/25/30
			Fuse Size (mm)	10*38
			Standard	IEC60269